

Screwdriving	tools		Hand tools		
	Tool holder		The same	Cutting pliers	88
O TOWN TO CO	Open-end and box-end wrenches	3	-5	Electronics pliers	92
	Sockets, 1/4 inch	14		Pincers	94
ca	Socket 3/8 inch	22		Stripping and crimping tools	99
	Socket 1/2 inch	26		VDE-insulated tools	105
\$5000000000000000000000000000000000000	Sockets, 3/4 inch	31		Hammers	108
	Hexagon and TX screwdrivers	31		Striking tools	112
	Slotted and Phillips screwdrivers	44		Scribers	115
	VDE-insulated tools	54		Hand saws	116
Name of the last o	Bit range	58	-	Cutting tools	117
STATE AMOUNT	Pipe sockets	69		Hole punchers, hole saws	124
	Torque screwdriver	73		Riveting tools	127
œ	Torque wrench	77		Inspection devices	127
Hand tools				Lever and lifting devices	128
	Screw clamps	78	Valuation III	Round brushes	129
	Gripping pliers	78		Round brusiles	127
diam's			The state of the s	Labelling	
	Water pump pliers	84		Tool storage	131
	Circlip pliers	86		Tool assortments	133



with ratchet, all-steel finish

Application:

For mounting tools with square shank.

Execution:

- Dual-jaw chuck with hardened jaws
- Chrome-plated and polished surface
- Movable T-handle



Advantage:

 Clockwise/anti-clockwise rotation and rigid application



Ref. no. 530



Ref. no. 540

Min./max. clamping wid	th of square	2-5 mm	2-5 mm	4.6-8 mm	4.6-8 mm	9-12.5 mm
Suitable for min./max. screw tap		M3-M8	M3-M8	M5-M12	M5-M12	M13-M20
Length (mm)	,	85	250	110	300	117
51005	ldent. No.	500	520	510	530	540
51005	ident. No.	•	•	•	•	•

Prod. Gr. 510

ATURN Open-end slugging wrench (DIN 133)

15° jaw angle

Ref. no. 510

Application:

For loosening tightly secured fittings

Execution:

- Die-forged heat-treated steel
- Very high impact strength for especially heavy screwing applications

Technical data:

- Jaw position: 15 Degree
- Surface: Plain
- Material: Chrome-vanadium steel



Ident. No. 027

Width across flats	Length (mm)	Thickness (mm)	Ident.	
24 mm	180	16	024	•
27 mm	180	16	027	•
30 mm	190	17	030	•
32 mm	190	17	032	•
34 mm	215	17.5	034	•
36 mm	215	17.5	036	•

Prod. Gr. 5HB

Width across flats	Length (mm)	Thickness (mm)	52004 Ident. No.
41 mm	235	18.5	041
46 mm	255	20	046
50 mm	275	21	050
55 mm	300	23	055
60 mm	320	24.5	060
65 mm	342	27	065 ●

Width	Length	Thickness	52004
across flats	(mm)	(mm)	Ident. No.
70 mm	375	30	070
75 mm	375	30	075
80 mm	408	34	080
85 mm	408	34	085 ●

ATORN Double open-end wrench (DIN 3110)

Jaw angle 15° at both ends

Execution:

- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating process
- Made from chromium-vanadium steel, die-forged and hardened.

Advantage:

Extremely durable and robust industrial design

Technical data:

- Jaw position: 15 Degree
- Material: Chrome-vanadium steel
- Surface: Special coating according to specifications



Ident. No. 290

Width across flats	Length (mm)	52010 Ident. No.
5.5 x 7 mm	124	200
6 x 7 mm	125	210
8 x 9 mm	140	220
8 x 10 mm	144	230
10 x 11 mm	159	240
10 x 13 mm	173	250
11 x 13 mm	173	260
12 x 13 mm	173	270
12 x 14 mm	174	280
13 x 14 mm	186	290
13 x 15 mm	188	300

Prod. Gr. 5HB

Width across flats	Length (mm)	52010 Ident. No.
13 x 17 mm	191	310
14 x 15 mm	191	320
14 x 17 mm	192	330
16 x 17 mm	201	340
16 x 18 mm	201	350 ●
17 x 19 mm	204	360 ●
18 x 19 mm	220	370
19 x 22 mm	236	380
20 x 22 mm	237	400
21 x 23 mm	239	410
22 x 24 mm	248	420

Width across	Length (mm)	52010
flats		Ident. No.
24 x 26 mm	247	430
24 x 27 mm	263	440
25 x 28 mm	280	450
27 x 30 mm	280	460
27 x 32 mm	292	470
30 x 32 mm	295	480
32 x 36 mm	310	490
34 x 36 mm	332	500
36 x 41 mm	352	510
41 x 46 mm	421	520 ●



ATORN Double open-end wrench sets (DIN 3110)

Jaw angle 15° at both ends

Application:

For tightening and loosening all types of screw connections

Execution:

- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating
- Made from chromium-vanadium steel, die-forged and hardened.

■ Extremely durable and robust industrial design

Technical data:

- Jaw position: 15 Degree
- Surface: Special coating according to specifications
- Material: Chrome-vanadium steel

Width across flats	Number of pieces in assortment/set (PCS)	52010 Ident. No.
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm	8	600
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm 24 x 27 mm 30 x 32 mm	10	610
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm 21 x 23 mm 24 x 27 mm 25 x 28 mm 30 x 32 mm	12	620 •





Ident. No. 610



DRION Double open-end wrench (DIN 3110)

Jaw angle 15° at both ends

Technical data:

Jaw position: 15 Degree

Material: Chrome-vanadium steel

■ Surface: Chrome plated



Width across flats	Length (mm)	Thickness (mm)	52017
			Ident. No.
6 x 7 mm	125	3.5	040
8 x 9 mm	142	3.9	060
8 x 10 mm	140	4.2	070
10 x 11 mm	157	4.5	105
10 x 13 mm	172	5.0	110
12 x 13 mm	173	5.0	150
13 x 15 mm	188	5.5	180
13 x 17 mm	205	5.8	190
14 x 15 mm	188	5.5	200

r. 526

Width across flats	Length (mm)	Thickness (mm)	52017 Ident. No.
16 x 17 mm	205	6.0	220
17 x 19 mm	210	6.5	230
18 x 19 mm	222	6.5	240
19 x 22 mm	233	7.0	250
20 x 22 mm	236	7.0	270
22 x 24 mm	249	7.8	290
24 x 27 mm	266	8.0	320
30 x 32 mm	304	9.0	380 ●

DRION Double open-end wrench sets (DIN 3110)

Jaw angle 15° at both ends

Advantage:

Range of the most common double open-end wrenches to suit practical demands

Technical data:

■ Jaw position: 15 Degree ■ Surface: Chrome plated

■ Material: Chrome-vanadium steel

Width across flats	Number of pieces in assortment/set (PCS)	52017 Ident. No.
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm	8	850 •
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm 24 x 27 mm 30 x 32 mm	10	860
6 x 7 mm 8 x 9 mm 10 x 11 mm 10 x 13 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 17 x 19 mm 18 x 19 mm 20 x 22 mm 24 x 27 mm 30 x 32 mm	12	870 •

Prod. Gr. 526



Ref. no. 870



Combination wrench (DIN 3113)

Jaw angle 15°, box-end side angled 15°





Execution:

- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating process
- Made from chromium-vanadium steel, die-forged and hardened.

■ DIN 3113 A

Advantage:

Extremely durable and robust industrial design

Technical data:

- Tip profile type: ENERGY profile
- Jaw position: 15 Degree
- Surface: Special coating according to
- specifications
- Material: Chrome-vanadium steel



Ident. No. 013

Width across	Length (mm)	52034
flats		Ident. No.
5 mm	90	004
5.5 mm	92	005
6 mm	100	006
7 mm	110	007
8 mm	120	008
9 mm	130	009
10 mm	140	010
11 mm	150	011
12 mm	160	012
13 mm	170	013
14 mm	180	014

Width across flats	Length (mm)	52034 Ident. No.
15 mm	190	015
16 mm	190	016
17 mm	210	017
18 mm	210	018
19 mm	230	019
20 mm	230	020
21 mm	260	021
22 mm	260	022
23 mm	270	023
24 mm	280	024
25 mm	280	025

Width across	Length (mm)	52034
flats		Ident. No.
26 mm	290	026
27 mm	310	027
28 mm	310	028
30 mm	340	030
32 mm	360	032
34 mm	420	034
36 mm	460	036
41 mm	480	041
46 mm	500	046

Prod. Gr. 5HB



Combination wrench sets (DIN 3113)

Jaw angle 15°, box-end side angled 15°





Application:

- Ident. No. 705:
- The new ATORN tool rolls are a robust and practical alternative to traditional storage solutions for your tools.
- The water-repellent nylon outer fabric protects your tools from damage and water when you are on the go.

Execution:

- Ident. No. 700, 710-730:
 - With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227

- Environmentally friendly chromium-VI-free coating process
- Made from chromium-vanadium steel, die-forged and hardened.
- DIN 3113 A
- Ident. No. 705:
- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop fastener

Advantage:

■ Ident. No. 700, 710-730: Extremely durable and robust industrial design

Technical data:

- Tip profile type: ENERGY profile
- Material: Chrome-vanadium steel



Ident. No. 705



Ident. No. 730

Width across flats	Number of pieces in assortment/ set (PCS)	Jaw position (Degree)	Surface	52034 Ident. No.
8 mm 10 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm	9	15	Special coating according to specifications	700
8 mm 10 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm	10	15	Chrome plated	705
6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm	12	15	Special coating according to specifications	710
10 mm 11 mm 12 mm 13 mm 14 mm 17 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm	12	15	Special coating according to specifications	720 •
6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 23 mm 24 mm	18	15	Special coating according to specifications	730 •

Prod. Gr. 5HB



DRION Combination wrench (DIN 3113)

Jaw angle 15°, box-end side angled 15°

Technical data:

■ Tip profile type: Standard profile

Jaw position: 15 Degree

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Width across flats	Length (mm)	52037 Ident. No.
6 mm	100	060
7 mm	110	070
8 mm	120	080
9 mm	130	090
10 mm	140	100
11 mm	150	110
12 mm	160	120

Width across flats	Length (mm)	52037 Ident. No.
13 mm	170	130
14 mm	180	140
15 mm	190	150
16 mm	190	160
17 mm	210	170
18 mm	210	180
19 mm	230	190

Width across flats	Length (mm)	52037 Ident. No.
20 mm	230	200
22 mm	260	220
24 mm	280	240
27 mm	310	270
30 mm	340	300
32 mm	360	320

Prod. Gr. 526

PRION Combination wrench sets, metric (DIN 3113)

Jaw angle 15°, box-end side angled 15°

Advantage:

 Practical range of various combination wrenches with the most common wrench sizes

- Tip profile type: ENERGY profile
- Surface: Chrome plated
- Material: Chrome-vanadium steel

Technical data:

Jaw position: 15 Degree

Width across flats	Number of pieces in assortment/set (PCS)	52037. Ident. N	
8 mm 9 mm 10 mm 11 mm 13 mm 14 mm 17 mm 19 mm	8	670	•
6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 17 mm 19 mm 22 mm	12	680	•
10 mm 11 mm 12 mm 13 mm 14 mm 17 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm	12	684	•
6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 22 mm 24 mm	17	690	•



Prod. Gr. 526



ATORN Combination wrench (DIN 3113)

Jaw angle 15°, box-end side flat depressed centre





- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating
- Made from chromium-vanadium steel, die-forged and hardened.

■ DIN 3113 B

Advantage:

Extremely durable and robust industrial design

Technical data:

- Tip profile type: ENERGY profile
- Jaw position: 15 Degree
- Surface: Special coating according to specifications
- Material: Chrome-vanadium steel



Ident. No. 119


Width across flats	Length (mm)	52039 Ident. No.
5 mm	95	104
5.5 mm	100	105
6 mm	100	106
7 mm	115	107
8 mm	125	108
9 mm	140	109
10 mm	145	110
11 mm	160	111 •

0.0 111111	100	.00	_
6 mm	100	106	•
7 mm	115	107	•
8 mm	125	108	•
9 mm	140	109	•
10 mm	145	110	•
11 mm	160	111	•
Prod Gr 5HR			

Width across	Length (mm)	52039
flats		Ident. No.
12 mm	165	112
13 mm	180	113
14 mm	190	114 •
15 mm	210	115
16 mm	220	116
17 mm	230	117 •
18 mm	245	118
10 mm	260	110

Width across	Length (mm)	52039
flats		Ident. No.
20 mm	270	120
21 mm	280	121 •
22 mm	290	122
24 mm	320	124
27 mm	350	127 •
30 mm	390	130
32 mm	410	132
36 mm	430	136

Prod. Gr. 5HB





ATORN Combination wrench sets (DIN 3113)

Jaw angle 15°, box-end side flat depressed centre





Application:

■ Ident. No. 405:

- The new ATORN tool rolls are a robust and practical alternative to traditional storage solutions for your tools.
- The water-repellent nylon outer fabric protects your tools from damage and water when you are on the go.

Execution:

■ Ident. No. 400, 410-420:

- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227

- Environmentally friendly chromium-VI-free coating process
- Made from chromium-vanadium steel, die-forged and hardened.
- DIN 3113 B

■ Ident. No. 405:

- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop fastener

Advantage:

■ Ident. No. 400, 410-420: Extremely durable and robust industrial design

Technical data:

■ Jaw position: 15

- Tip profile type: ENERGY profile
- Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 405



Ident. No. 410

Width across flats	Number of pieces in assortment/set (PCS)	52039 Ident. No.
8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm	10	400
8 mm 10 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm	10	405
10 mm 11 mm 12 mm 13 mm 14 mm 17 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm	12	410
6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 24 mm	18	420 •

Prod. Gr. 5HB



Ratchet combination wrench

straight version



Execution:

- Finely toothed ratchet on socket end with 72 teeth
- 5° return angle

Advantage:

lacksquare 5° switching angle enables working in the most confined spaces

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 108

Width across	Length (mm)	52044
flats		Ident. No.
6 mm	125	106
7 mm	130	107
8 mm	136	108
9 mm	143	109
10 mm	160	110
11 mm	168	111 •
12 mm	174	112 •
13 mm	180	112

Prod. Gr. 5HB

Width across	Length (mm)	52044
flats		Ident. No.
14 mm	193	114
15 mm	200	115
16 mm	216	116
17 mm	233	117 •
18 mm	239	118
19 mm	250	119
21 mm	285	121 •
22 mm	285	122

Width across	Length (mm)	52044
flats		Ident. No.
24 mm	325	124
27 mm	359	127 •
30 mm	425	130
32 mm	425	132
34 mm	430	134
36 mm	460	136
38 mm	480	138
41 mm	520	141



ATORN Ratchet combination wrench set

straight version



Application:

■ Ident. No. 250:

- The new ATORN tool rolls are a robust and practical alternative to traditional storage solutions for your tools.
- The water-repellent nylon outer fabric protects your tools from damage and water when you are on the go.

Execution:

- Ident. No. 200:
- Finely toothed ratchet on socket end with 72 teeth
- 5° return angle
- Ident. No. 250:

- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop fastener

Advantage:

■ Ident. No. 200: 5° switching angle enables working in the most confined spaces

Ident. No. 200: In roll-up pouch

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 200



Ident. No. 250

Width across flats Number of pieces in assortment/set (PCS) 52044. Ident. No. 8 mm | 10 mm | 13 mm | 17 mm | 19 mm 5 200 8 mm | 10 mm | 12 mm | 13 mm | 14 mm | 15 mm | 16 mm | 17 mm | 18 mm | 19 10 250 mm

Prod. Gr. 5HB

ATORN Ratchet combination wrench

reversible



Execution:

- Finely toothed ratchet on socket end with 72 teeth
- 5° switching angle
- Socket end angled 15°

Advantage:

• 15° angled offset for better access in tight installation spaces



■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Ident. No. 208

Width across flats	Length (mm)	52044 Ident. No.
6 mm	125	206
7 mm	130	207
8 mm	140	208
9 mm	150	209
10 mm	159	210
11 mm	165	211 •
12 mm	172	212

Prod. Gr. 5HB

Width across flats	Length (mm)	52044 Ident. No.
13 mm	178	213 •
14 mm	191	214
15 mm	200	215
16 mm	208	216
17 mm	226	217 •
18 mm	237	218
19 mm	248	219

Width across	Length (mm)	52044
flats		Ident. No.
21 mm	285	221 •
22 mm	285	222
24 mm	325	224
27 mm	360	227 •
30 mm	425	230
32 mm	425	232
26 mm	125	224



Ratchet combination wrench set

reversible



Application:

■ Ident. No. 350:

- The new ATORN tool rolls are a robust and practical alternative to traditional storage solutions for your tools.
- The water-repellent nylon outer fabric protects your tools from damage and water when you are on the go.

Execution:

- Ident. No. 300:
 - Finely toothed ratchet on socket end with 72 teeth
- 5° switching angle
- Socket end angled 15°

■ Ident. No. 350:

- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop fastener

Advantage:

■ Ident. No. 300: 15° angled offset for better access in tight installation spaces

Ident. No. 300: In roll-up pouch

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel

Prima Aleberrary Ulama
17mm 25 17mm
Plans Account Vision
10mm F200309 10mm
Ident. No. 300



Ident. No. 350

Width across flats	Number of pieces in assortment/set (PCS)		52044	
		Ident.	No.	
8 mm 10 mm 13 mm 17 mm 19 mm	5	300	•	
8 mm 10 mm 12 mm 13 mm 14 mm				
15 mm 16 mm 17 mm 18 mm 19	10	350	•	
mm				

Prod. Gr. 5HB

ATORN Ratchet combination wrench

swivel head



Execution:

- Finely toothed ratchet on socket end with 72 teeth
- 5° switching angle

Advantage:

• Flexible applications and access in tight installation spaces thanks to movable swivel head

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel



Width acros	ss flats	8 mm	9 mm	10 mm	11 mm	12 mm	13 mm	14 mm	15 mm	16 mm	17 mm	18 mm	19 mm
Length (mn	n)	136	143	160	168	174	180	193	200	216	233	239	250
52044	Ident. No.	308	309	310	311	312	313	314	315	316	317	318	319

Prod. Gr. 5HB



ATORN Ratchet combination wrench set

swivel head



Application:

- Ident. No. 450:
- The new ATORN tool bags are the robust and practical alternative to conventional storage of your tools.
- Thanks to the water-repellent nylon outer fabric and fine zip system with ATORN zipper, the tools you carry are safely protected from damage and moisture.

Execution:

- Ident. No. 400:
- Finely toothed ratchet on socket end with 72 teeth

Width across flats

- 5° switching angle
- Ident. No. 450:

- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop fastener

Advantage:

■ Ident. No. 400: Flexible applications and access in tight installation spaces thanks to movable swivel head

52044...

Delivery:

Ident. No. 400: In roll-up pouch

Technical data:

■ Surface: Chrome plated

Number of pieces in assortment/set (PCS)

Material: Chrome-vanadium steel



Ident. No. 400



Ident. No. 450

Ident. No. 5 8 mm | 10 mm | 13 mm | 17 mm | 19 mm 400 8 mm | 10 mm | 12 mm | 13 mm | 14 mm | 15 mm | 16 mm | 17 mm | 18 mm | 19 10 450 mm

Prod. Gr. 5HB

ATORN Wrench adapter for combination ratchet wrench



Execution:

- Ident. No. 410-415: Suitable for wrenches no. 52044 110 and 310
- Ident. No. 420: Suitable for wrenches no. 52044 113 and 313
- Ident. No. 430: Suitable for wrenches no. 52044 119 and 319

Advantage:

 Wrench is used as fine-pitch drive ratchet for various applications

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 420

		Suitable for width across flats		
52044	For 1/4" bits, hexagon	10 mm	ldent. No.	410 •
52044	For 1/4" nuts, square	10 mm	Ident. No.	415 ●
52044	For 3/8" nuts, square	13 mm	Ident. No.	420 •
52044	For 1/2" nuts, square	19 mm	Ident. No.	430 •

Prod Gr 5HB

Ratchet combination wrench

ratchet function on both sides



Application:

For screw connections in inaccessible places with optimum flexibility.

Execution:

- Finely toothed ratchet on socket end with 72 teeth
- Ratchet function on jaw side via spring-loaded insert and special jaw geometry

- Tight switching angle thanks to fine toothing
- Maximum flexibility offered by two-sided ratchet function

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel





Head detail

Width across flats	Length (mm)	52044 Ident. No.	
8 mm	140	508	
9 mm	149	509	
10 mm	158	510	
11 mm	165	511	
12 mm	171	512	

Width across flats	Length (mm)	52044 Ident. No.
13 mm	178	513 •
14 mm	190	514
15 mm	199	515
16 mm	208	516
17 mm	225	517

Width across flats	Length (mm)	52044 Ident. No.
18 mm	236	518
19 mm	247	519
21 mm	289	521
22 mm	289	522
24 mm	322	524 ●

ATORN Ratchet combination wrench set

ratchet function on both sides



Application:

Ident. No. 600: For screw connections in inaccessible places with optimum flexibility

- Ident. No. 650:
- The new ATORN tool rolls are a robust and practical alternative to traditional storage solutions for your tools.
- The water-repellent nylon outer fabric protects your tools from damage and water when you are on the go.

Execution:

- Ident. No. 600:
- Finely toothed ratchet on socket end with 72 teeth

- Ratchet function on jaw side via spring-loaded insert and special jaw geometry
- Ident. No. 650:
- Robust nylon textile tool roll
- Mesh tool compartments and hook-and-loop


Advantage:

- Ident. No. 600:
 - Tight switching angle thanks to fine toothing
 - Maximum flexibility offered by two-sided ratchet function

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel

Width across flats	Number of pieces in assortment/set (PCS)	5204	4
	, , ,	Ident.	No.
8 mm 10 mm 13 mm 17 mm 19 mm	5	600	•
8 mm 10 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19	10	650	•
mm			





Ident. No. 600



Ident. No. 650

Prod. Gr. 5HB

TORN Striking-face box-end wrench (DIN 7444)



Application:

For loosening tightly secured fittings

Execution:

- Die-forged heat-treated steel
- Very high impact strength for especially heavy screwing applications

 Special profile for a better grip and prevents damage to the screw head

Technical data:

- Tip profile type: Special profile
- Surface: Plain
- Material: Chrome-vanadium steel



Ident. No. 036

Width	Length	Thickness	52049
across	(mm)	(mm)	Ident. No.
flats			
24 mm	165	15	024
27 mm	180	16	027
30 mm	190	17	030
32 mm	190	17	032
34 mm	205	18	034
36 mm	205	18	036

Width across flats	Length (mm)	Thickness (mm)	52049 Ident. No.		
41 mm	230	20	041		
46 mm	240	22	046		
50 mm	255	24	050		
55 mm	270	25	055		
60 mm	280	26	060		
65 mm	300	30	065		

Width across flats	Length (mm)	Thickness (mm)	52049 Ident. No.	
70 mm	330	33	070	•
75 mm	330	33	075	•
80 mm	360	36	080	•
85 mm	360	36	085	•

ATORN Attachable box wrench

depressed centre, heavy-duty version



For the transmission of extremely high tightening torques

Execution:

- Forged from CrV steel and hardened
- Ring with depressed centre

- Spring-loaded locking pin for locking the extension
- Matching extension bar, art. no. 52051 001 to 004

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel

Width across flats	Length (mm)	Thickness (mm)	52051 Ident. No.
24 mm	180	17	024 •
27 mm	185	17	027 •
30 mm	195	18	030
32 mm	230	18	032
34 mm	235	19	034
36 mm	240	20	036

iess	5205		wiath
n)	Ident.	No.	across
			flats
,	024	•	41 mm
,	027	•	46 mm
}	030	•	50 mm
}	032	•	55 mm
)	034	•	60 mm
)	036	•	65 mm

Width across flats	Length (mm)	Thickness (mm)	5205 Ident.	
41 mm	250	22	041	•
46 mm	260	23	046	•
50 mm	270	25.5	050	•
55 mm	270	28	055	•
60 mm	345	30.5	060	•
65 mm	355	33	065	•



Ident, No. 024

	Width	Length	Thickness	5205	
	across flats	(mm)	(mm)	Ident.	No.
Н		0/5	05.5	070	_
L	70 mm	365	35.5	070	•
	75 mm	375	38	075	•
	80 mm	385	40.5	080	•
	85 mm	385	40.5	085	•

Prod. Gr. 5HB

ATORN Extension bar for attachable ring wrench

Application:

Extension bar to extend the lever arm.

Execution:

■ Chrome-plated CrV steel

■ With hole for the locking pin

Technical data:

■ Surface: Chrome plated

Suitable for width across flats		24-30 mm	32-41 mm	46-55 mm	60-95 mm
Pipe Ø (mm)		19	22	25	30
Length (mm)		460	610	760	865
52051	Ident. No.	001 •	002 •	003	004 •

Prod. Gr. 5HB

ATORN

Single-end box wrench (DIN 3111)



- Special profile in the ring for perfect grip, prevents damage to the screw heads
- Particularly suitable for securing screw connections

• Q and T steel, forged and hardened

Technical data:

Width

across

flats 20 mm

21 mm

22 mm

24 mm

25 mm

26 mm

27 mm

- Surface: Uncoated
- Material: Chrome-vanadium steel

Length

(mm)

171

171

190

215

215

215

230

Thickness

(mm)

11.5

13

15

15

15

16

52058...

020

021

022

024

025

026

027

•

•

33 mm

34 mm

Ident. No.



Ident. No. 015

Width	Length	Thickness	5205	8	_
across	(mm)	(mm)	Ident.	No.	
flats					
28 mm	230	16	028	•	
29 mm	230	16	029	•	
30 mm	254	18	030	•	
32 mm	265	19	032	•	

265

265

295

19

19

22

033

034

036

Width across	Length (mm)	Thickness (mm)	52058 Ident. No.
flats	()	()	Tuonia 1101
13 mm	138	8.3	013
14 mm	138	8.3	014
15 mm	138	8.3	015
16 mm	138	8.3	016
17 mm	155	9.5	017
18 mm	155	9.5	018
19 mm	171	11.5	019

Prod.	Gr.	5HB

ATORN Double ring wrench (DIN 838)

deep offset on both sides



- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating

■ Made from chromium-vanadium steel, die-forged and hardened.

Advantage:

Extremely durable and robust industrial design

Technical data:

- Tip profile type: ENERGY profile
- Surface: Special coating according to specifications
- Material: Chrome-vanadium steel

111	
THE PARTY OF THE P	

Ident, No. 210

Width across	Length (mm)	52054
flats		Ident. No.
6 x 7 mm	178	100
8 x 9 mm	195	110
8 x 10 mm	195	120
10 x 11 mm	200	130
10 x 13 mm	220	140
12 x 13 mm	220	150
12 x 14 mm	220	160
13 x 14 mm	220	170
13 x 15 mm	225	180

Prod.	Gr.	5HB

Width across	Length (mm)	52054
flats	Lengui (iiiii)	Ident. No.
13 x 17 mm	250	190 •
14 x 15 mm	235	200
14 x 17 mm	250	210
16 x 17 mm	250	220
17 x 19 mm	285	240
18 x 19 mm	285	250
19 x 22 mm	300	260
19 x 24 mm	300	270 •
20 x 22 mm	300	280

Width across	Length (mm)	52054
flats		Ident. No.
21 x 23 mm	300	290
22 x 24 mm	320	300
24 x 26 mm	330	310
24 x 27 mm	330	320
25 x 28 mm	345	330
27 x 32 mm	360	340
30 x 32 mm	360	350
32 x 36 mm	400	360 ●
36 x 41 mm	440	370



TORN Double ring wrench sets (DIN 838)

deep offset on both sides





Execution:

- With completely new special surface
- Maximum resistance against contact corrosion
- 15x greater corrosion protection against exposure to temperature, road salt and environmental influences compared to conventionally coated keys
- Up to 720 hours in the salt spray test in accordance with DIN EN ISO 9227
- Environmentally friendly chromium-VI-free coating process

 Made from chromium-vanadium steel, die-forged and hardened.

Advantage:

Extremely durable and robust industrial design

Technical data:

- Tip profile type: ENERGY profile
- Surface: Special coating according to specifications
- Material: Chrome-vanadium steel

Width across flats	Number of pieces in assortment/set (PCS)	5205 Ident.	
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm	8	500	•
6 x 7 mm 8 x 9 mm 10 x 11 mm 10 x 13 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm 21 x 23 mm 24 x 27 mm 25 x 28 mm	12	510	•





Ident. No. 510



DRION Double ring wrench (DIN 838)

deep offset on both sides

Execution:

Drop-forged

Advantage:

- Shaft profile creates excellent bending rigidity
- Deep offset makes it easier to work in hard-toreach places

Technical data:

- Tip profile type: Standard profile
- Surface: Chrome plated
- Material: Chrome-vanadium steel



Width across	Length (mm)	52059
flats	,	Ident. No.
6 x 7 mm	178	060
8 x 9 mm	195	080
10 x 11 mm	200	100
10 x 13 mm	220	105

0 X / 111111	170	000	•		
8 x 9 mm	195	080	•		
10 x 11 mm	200	100	•		
10 x 13 mm	220	105	•		
Prod. Gr. 526					

flats	Lengui (iiiii)	Ident.	
12 x 13 mm	220	120	•
14 x 15 mm	235	140	•
16 x 17 mm	250	160	•
17 x 19 mm	285	170	•

Width across | Length (mm) | 52050

Width across	Length (mm)	52059	<i>)</i>
flats		Ident.	No.
18 x 19 mm	285	180	•
20 x 22 mm	300	200	•
24 x 27 mm	330	240	•
30 x 32 mm	360	300	•

DRION Double ring wrench sets (DIN 838)

deep offset on both sides

Technical data:

■ Surface: Chrome plated

■ Material:	Chrome-vanadium	ctabl

Width across flats	Number of pieces in assortment/set (PCS)	5205 Ident.	
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm	8	790	•
6 x 7 mm 8 x 9 mm 10 x 11 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 18 x 19 mm 20 x 22 mm 24 x 27 mm 30 x 32 mm	10	800	•
6 x 7 mm 8 x 9 mm 10 x 11 mm 10 x 13 mm 12 x 13 mm 14 x 15 mm 16 x 17 mm 17 x 19 mm 18 x 19 mm 20 x 22 mm 24 x 27 mm 30 x 32 mm	12	810	•





ATORN Wrench adjustable

Application:

For quickly adjusting the wrench size.

Execution:

- Chrome-vanadium steel
- Metric adjustment scale
- Comfortable ergonomic handle

- Extremely large clamping range
- With suspension eyelet
- Smooth, ground jaws

Technical data:

- Jaw position: 15 Degree
- Surface: Burnished



Max. width across flats (mm)		24	33
Length (mm)		150	250
52148	ldent. No.	015 •	025 •

Prod. Gr. 5HB



Application:

For quickly adjusting the wrench size.


Execution:

- Chrome-vanadium steel
- Drop-forged
- Type B

- Polished head
- Scale
- With hanging eyelet

Advantage:

- Shaft profile creates excellent bending rigidity
- Enables quick working with flexible wrench sizes and scale







ATORN Socket set

1/4 inch square drive 6.3, DIN 3120



Application:

For tightening and loosening all types of screw connections

Execution:

- Chrome-vanadium steel inserts
- Hexagon with special profile

Advantage:

- Optimum force transmission thanks to special profile
- Bolt and nut are not damaged
- Higher torques possible

- Two-tone polyethylene foam inlay ensures any missing tools are instantly detected
- Oil and chemical-resistant foam inlay

Delivery:

In powder-coated steel case with polyethylene foam inlay







Ident. No. 031

Ident. No. 101

Ident. No. 011

Ident. No. 021

Drive	Drive		1/4 inch	1/4 inch	1/4 inch 1/2 inch
Number of pieces in assortmen	nt/set (PCS)	18	28	42	35
Sockets with hexagon-head tip provided		4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	5.5 mm 7 mm 8 mm 10 mm 13 mm 16 mm 17 mm 18 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm
Long sockets with hexagon-he	ad tip provided	-	-	8 mm 10 mm 11 mm 13 mm	-
Sockets with socket hexagon-head tip provided		-	3 mm 4 mm 5 mm 6 mm 8 mm	3 mm 4 mm 5 mm 6 mm 8 mm	3 mm 4 mm 5 mm 6 mm 8 mm 10 mm 12 mm 14 mm 17 mm
Sockets with socket hexagon head or external TX tip provided		-	-	TX10 TX15 TX20 TX25 TX30 TX40	-
Sockets with cross-head tip provided		-	PH1 PH2 PZ1 PZ2	PH1 PH2 PH3 PZ1 PZ2 PZ3	-
Sockets with slotted tip provided		-	4 mm 5.5 mm 6.5 mm	4 mm 5.5 mm 6.5 mm	-
Ratchets provided		1/4-inch square 150 mm	1/4-inch square 150 mm	1/4-inch square 150 mm	1/4-inch square 150 mm 1/2-inch square 255 mm
Extensions provided		50 mm 105 mm	50 mm	50 mm 105 mm	50 mm 105 mm 125 mm 250 mm
Cross handles provided		115 mm	115 mm	115 mm	115 mm 300 mm
Cardan joints provided		38 mm	38 mm	38 mm	38 mm 75 mm
External dimensions of box		220 x 110 x 35 mm	220 x 110 x 35 mm	315 x 115 x 43 mm	-
58006	ldent. No.	011 ●	021 •	031 •	101 •

Prod. Gr. 582



Socket sets

with hexagon sockets, 1/4 inch square drive 6.3 DIN 3120



Execution:

- Highly impact-resistant plastic box with anti-slip properties
- Ident. No. 045:
- \blacksquare 36 pieces 8 actuating tools and 28 inserts
- Ratchet and Stubby handle with ergonomically shaped 3-component handle
- Ident. No. 045, 048: All tools secured in place in 2-colour foam insert
- Ident. No. 047:
- 29 pieces 5 actuating tools, 24 screw inserts
- Smart combi grip with fold-out function for high torques
- Ratchet and screwdriver with ergonomically shaped 3-component handle

■ Ident. No. 048:

- 20 pieces 2 actuating tools and 18 inserts
- Highly flexible ratcheting handle with 180° bend mechanism
- 1/4 in quick-change chuck for bit or adapter direct mounting
- Ratchet with ergonomically shaped 3-component handle

Advantage:

- Ident. No. 048:
 - Extremely high transmittable torques of up to 50 Nm via the bend handle
 - Super strong switching mechanism with fine toothing 48 teeth/7.5° return angle)
- Handle is non-detachably connected to the forged part

Technical data:

■ Drive: 1/4 inch







Ident. No. 047



Ident. No. 048

Number of pieces in assortment/set (PCS)		36	29	20
Sockets with hexagon-head tip provided		4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	4 mm 5 mm 5.5 mm 6 mm 8 mm 10 mm 13 mm	7 mm 8 mm 10 mm 12 mm 13 mm
Sockets with socket hexagon-head tip	provided	4 mm 5 mm 6 mm	5 mm 6 mm	-
Sockets with socket hexagon head or external TX tip provided		TX10 TX15 TX20 TX25 TX30	TX15 TX20 TX25 TX30 TX40	TX15 TX20 TX25 TX30
Sockets with cross-head tip provided		PH1 PH2 PH3 PZ1 PZ2	PH1 PH2 PH3 PZ1 PZ2 PZ3	PH0 PH1 PH2 PH3 PZ1 PZ2 PZ3
Sockets with slotted tip provided		4 mm 5.5 mm	5 mm 6.5 mm	1.2 x 6.5 mm
Ratchets provided		1/4-inch square	1/4-inch square	-
Extensions provided	50 mm 100 mm 75 mm		150 mm	
Cross handles provided		-	165 mm	-
Cardan joints provided		35 mm	-	-
58006 Ident. No.		045 ●	047 •	048 •

58006 047 = Prod. Gr. 5HG 58006 045 = Prod. Gr. 582 58006 048 = Prod. Gr. 582



1/4 inch square drive 6.3, DIN 3120







Execution:

- Chrome-vanadium steel inserts
- Matt chromium-plated
- Ratchet with two-component handle
- Finely toothed
- With release button

Advantage:

■ Two-tone polyethylene foam inlay ensures any missing tools are instantly detected

In sheet steel case with polyethylene foam inlay

Drive		1/4 inch	1/4 inch
Number of pieces in assortment	t/set (PCS)	18	17
Sockets with socket hexagon-he	ead tip provided	-	3 mm 4 mm 5 mm 6 mm 8 mm
Sockets with socket hexagon head or external TX tip provided		TX8 TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40 E4 E5 E6 E7 E8 E10	TX8 TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40
Ratchets provided	Ratchets provided		1/4-inch square
Extensions provided		50 mm 105 mm	50 mm 105 mm
58006 Ident. No.		050 •	060 •

Prod. Gr. 582



Ident. No. 050



Ident. No. 060



with hexagon inserts, 1/4 inch square drive 6.3 DIN 3120









Ref. no. 010





Execution:

- Chrome-vanadium steel
- Chrome-plated

- Ident. No. 010: 11 socket wrench inserts, 5 operating tools
- Ident. No. 020: 35 socket wrench inserts, 5 operating tools



Ref. no. 020

■ Ident. No. 030: 27 socket wrench inserts, 4 operating tools

Delivery:

In painted metal case



Ref. no. 030

Drive		1/4 inch	1/4 inch	1/4 inch
Number of pieces in assortment/set (PCS)	16	40	31
Sockets with hexagon-head tip provided		4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 13 mm	4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm
Sockets with socket hexagon-head tip	provided	-	3 mm 4 mm 5 mm 6 mm	4 mm 5 mm 6 mm
Sockets with socket hexagon head or external TX tip provided		-	TX8 TX9 TX10 TX10 TX15 TX20 TX25 TX27 TX30 TX40	TX10 TX15 TX20
Sockets with cross-head tip provided		-	PH1 PH2 PH3 PZ1 PZ2 PZ3 PH1 PH2 PH3 PZ1 PZ	
Sockets with slotted tip provided		-	3 mm 4 mm 6 mm	4 mm 5 mm 6 mm
Ratchets provided		1/4-inch square	1/4-inch square	1/4-inch square
Extensions provided		100 mm	50 mm	50 mm
Drive handle provided		150 mm	150 mm	-
Cross handles provided		115 mm	115 mm	115 mm
Cardan joints provided		nts provided 35 mm		35 mm
External dimensions of box		195 x 105 x 33 mm	330 x 170 x 55 mm	230 x 140 x 40 mm
58010 Ident. No.		010 •	020 •	030 •

Prod. Gr. 5LB

DRIDN[®] Socket sets

1/4 inch and combination set 1/4+3/8+1/2 inch



Execution

- Chrome-vanadium steel
- Ident. No. 100: With flexible 145-mm extension

Advantage:

 High-quality insertion tools to robust, long-lasting industry-standard specification

- Reversible ratchet with two-component handle and locking button
- Individual parts are securely stored and transported using clamping function
- Any missing tools are instantly detected thanks to size-related tool recesses

Delivery:

In impact-resistant plastic box

Drive	Drive		1/4 inch 3/8 inch 1/2 inch
Number of pieces in assortmen	t/set (PCS)	46	172
Sockets with hexagon-head tip provided		4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm	4 mm 4.5 mm 5 mm 5.5 mm 6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 24 mm 27 mm 30 mm
Long sockets with hexagon-hea	d tip provided	-	16 mm 18 mm 21 mm
Sockets with socket hexagon-he	ead tip provided	3 mm 4 mm 5 mm 6 mm 7 mm 8 mm	3 mm 4 mm 5 mm 6 mm 7 mm 8 mm 10 mm 12 mm 14 mm
Sockets with socket hexagon head or external TX tip provided		TX10 TX15 TX20 TX25 TX30 TX40	TX8 TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40 TX45 TX50 TX55 TX60 TX70 E4 E5 E6 E7 E8 E10 E11 E12 E14 E16 E18
Sockets with cross-head tip pro	vided	PH1 PH2 PH3 PZ1 PZ2 PZ3	PH0 PH1 PH2 PH3 PH4 PZ0 PZ1 PZ2 PZ3 PZ4
Sockets with slotted tip provide	Sockets with slotted tip provided		4 mm 5 mm 6.5 mm 7 mm 8 mm 10 mm 12 mm
Ratchets provided		1/4-inch square	3/8-inch square 1/4-inch square 1/2-inch square
Extensions provided		50 mm 100 mm 145 mm	50 mm 100 mm 125 mm 250 mm
Drive handle provided		150 mm	150 mm
Cross handles provided		115 mm	115 mm
Cardan joints provided		35 mm	34 mm 48 mm 70 mm
Bit holder provided		1/4 inch	1/4 inch
External dimensions of box		-	520 x 370 x 100 mm
58010	Ident. No.	100 ●	500 ●





Ref. no. 100



Ref. no. 500



DRION Adapter set (DIN 3123)

6 pieces

Application:

For universal use of 1/4" up to 3/4" square

Execution:

- Internal square to external square adapter:
- 1/4" to 3/8"; 3/8" to 1/4"; 1/2" to 3/4"

■ 3/8" to 1/2"; 1/2" to 3/8"; 3/4" to 1/2"

Advantage:

- Individual parts are securely stored and transported using clamping function
- Any missing tools are instantly detected thanks to size-related tool recesses

Drive		1/4 inch 3/8 inch 1/2 inch 3/4 inch	
Tip size		1/4 inch 3/8 inch 1/2 inch 3/4 inch	
Surface		Chrome plated	
Material		Chrome-vanadium steel	
Number of pieces in assortment/set (PCS)		6	
58010	ldent. No.	600 •	

Prod. Gr. 5LB



Reversible ratchets: Fine-tooth ratchet, telescopic ratchet, Mini ratchet

1/4 inch square drive 6.3



Application:

Ident. No. 010: Ratchet for manual socket wrench inserts and connection parts.

Ident. No. 050: ratchet for manual socket wrench bits and connectors.

Ident. No. 100: Ratchet for direct mounting of bits with 1/4 inch hexagon head.

Execution:

- Ident. No. 010:
- Anti-clockwise and clockwise rotation possible using reversing lever with locking button
- With hanging eyelet
- Ident. No. 010, 100: Finely toothed

■ Ident. No. 050:

- telescopic function: can be extended from 150 to 200 mm
- ratcheting/clamping function
- anti-clockwise and clockwise rotation possible using reversing lever with locking button



- Anti-clockwise/clockwise rotation can be switched using reversing lever
- With thumb wheel

Advantage:

• Ident. No. 100: Thumb wheel for easier placement, screwing and unscrewing of bolts





Ident. No. 100

Tip size		1/4 inch	1/4 inch	1/4 inch
Length (mm)		150	200	100
Number of teeth (PCS)		72	72	72
Surface		Chrome plated	Chrome plated	Chrome plated
Material		Chrome-vanadium steel	Chrome-vanadium steel	Chrome-vanadium steel
Material of handle		2-component plastic	2-component plastic	Steel
58002	Ident. No.	010 •	050	100

Prod. Gr. 582

ORION®

Ratchet (DIN 3122)

1/4 inch square drive 6.3

Execution:

 Anti-clockwise and clockwise rotation possible using reversing lever with locking button

Tip size	1/4 inch		
Length (mm)	150		
Number of teeth (PCS)	72		
Surface	Chrome plated		
Material	Chrome-vanadium steel		
58274	ldent. No.	500	
30274	ident. No.	•	

Prod. Gr. 5LB





No. 58003



ACTURN Actuating tools (DIN 3120)

1/4 inch square drive 6.3



Application:


No. 58003: Drive handle for manual socket wrench inserts and connection parts

No. 58006: drive handle for manual socket wrench inserts and connection parts

Execution:

- No. 58003: Screwdriver handle with 1/4" internal and external square
- No. 58006 1/4-inch se

6: 2-comp square dri	onent screwdriver handle with	0
	1/4 inch	No. 58006
	Chrome plated	
	Chrome-vanadium steel	



Prod. Gr. 582



ATDRN Socket insert, short and long (DIN 3124)

Hexagon, 1/4 inch square drive 6.3 DIN 3120



Advantage:

- Optimum force transmission thanks to special profile
- Bolt and nut are not damaged
- Higher torques possible

Technical data:

- Drive: 1/4 inch
- Tip profile type: Special profile
- Surface: Chrome plated
- Material: Chrome-vanadium steel





ATORN

No. 58042

No. 58030

		Stand	dard version	Lor	ng version
		25		50	
Width across flats	Outer Ø (mm)	58030 Ident. No.		58042 Ident. No.	
4 mm	11	040	•	040	•
4.5 mm	11	045	•	045	•
5 mm	11	050	•	050	•
5.5 mm	11	055	•	055	•
6 mm	11	060	•	060	•
7 mm	11	070	•	070	•
8 mm	12	080	•	080	•

Prod.	Gr.	582
-------	-----	-----

		Standard version	Long version
	Length (mm)	25	50
Width across flats	Outer Ø (mm)	58030	58042
		Ident. No.	Ident. No.
4 mm	11	040	040
4.5 mm	11	045	045 ●
5 mm	11	050	050
5.5 mm	11	055	055 ●
6 mm	11	060	060
7 mm	11	070	070
8 mm	12	080	080
		•	

		Standard version	Long version
	Length (mm)	25	50
Width across flats	Outer Ø (mm)	58030	58042
	, ,	Ident. No.	Ident. No.
9 mm	13	090	090
10 mm	14	100	100
11 mm	16	110	110
12 mm	17	120	120
13 mm	18	130	130
14 mm	14 mm 20		140

ATORN Sockets (DIN 3120)

for external TX screws, 1/4 inch square drive 6.3 DIN 3120



Execution:

- polished
- Knurled

Advantage:

■ Secure handling thanks to non-slip knurling

Technical data:

- Drive: 1/4 inch
- Surface: Chrome plated
- Material: Chrome-vanadium steel
- Length: 25 mm



Tip size		E4	E5	E6	E7	E8	E10
58057	ldent. No.	040 •	050 •	060 •	070 •	080 •	100 •



ATORN Screwdriver bit (DIN 3120)

for slotted screws, 1/4 inch square drive, 6.3, DIN 3120



Application:

Suitable for slotted screws. For manual and machine operation (not suitable for impact).

Execution:

■ Burnished tips

Advantage:

■ Improved resistance to corrosion thanks to burnishing process



■ Drive: 1/4 inch

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel

■ Length: 37 mm



Width of cutting edge (mm)		4.0	5.5	6.5	
Thickness of cutting edge (mm)		0.8	1.0	1.2	
58073	ldent. No.	060	070	080	
36073	ident. No.	•	•	•	

Prod. Gr. 582



ATORN Screwdriver bits (DIN 3120)

for Phillips screws



Execution:

Burnished tips

Advantage:

■ Improved resistance to corrosion thanks to burnishing process

Technical data:

- Drive: 1/4 inch
- Surface: Chrome plated
- Material: Chrome-vanadium steel
- Length: 37 mm



Tip size		PH1	PH2	PH3	PZ1	PZ2	PZ3
58091	ldent. No.	010 •	020 •	030 •	-	-	-
58092	Ident. No.	-	-	-	010 •	020 •	030

Prod. Gr. 582



Screwdriver bits (DIN 3120)

for hexagon socket screws, 1/4 inch square drive 6.3 DIN 3120



Execution:

■ Burnished tips

Advantage:

■ Improved resistance to corrosion thanks to burnishing process



				Surface	Chrome plated
				Material	Chrome-vana- dium steel
	Drive	Width across flats	Tip type	Length (mm)	58120 Ident. No.
Ī	1/4 inch	3 mm	Hexagon	28	030
Ī	1/4 inch	4 mm	Hexagon	28	040
ſ	1/4 inch	5 mm	Hexagon	28	050
	1/4 inch	6 mm	Hexagon	28	060
	1 / 4 inch	8 mm	Hexagon	28	080



for hexagon socket screws, 1/4 inch square drive 6.3 DIN 3120



■ Extra-long version: Overall length 100 mm



■ Ident. No. 120-160: Hexagon ball head facilitates screwing at an angle of up to 25°



Ident. No. 050



Ident. No. 150

				Surface	Chr	ome plated
				Material	Chrome	-vanadium steel
Drive	Width across flats	Tip type	Design	Length (mm)	58119 Ident. N	
1/4 inch	2 mm	For hexagon socket	Straight	100	020	•
1/4 inch	2.5 mm	For hexagon socket	Straight	100	025	•
1/4 inch	3 mm	For hexagon socket	Straight	100	030	•
1/4 inch	4 mm	For hexagon socket	Straight	100	040	•
1/4 inch	5 mm	For hexagon socket	Straight	100	050	•
1/4 inch	6 mm	For hexagon socket	Straight	100	060	•
1/4 inch	2 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	120	•
1/4 inch	2.5 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	125	•
1/4 inch	3 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	130	•
1/4 inch	4 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	140	•
1/4 inch	5 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	150	•
1/4 inch	6 mm	For hexagon socket Hexagon with ball head	With ball head on one side	100	160	•

Prod. Gr. 582



ATORN Screwdriver bits, extra long

for internal TX screws, 1/4 inch square drive 6.3 DIN 3120

■ Extra-long version: Overall length 100 mm

Technical data:

■ Drive: 1/4 inch ■ Material: Chrome-vanadium steel

■ Length: 100 mm





Ident. No. 030

Tip size			TX10	TX15	TX20	TX25	TX27	TX30	TX40
	Surface								
58139	Chrome plated	ldent. No.	010 •	015 •	020 •	025 •	027 •	030 •	040 •

Prod. Gr. 582



Adapters with ball detent (DIN 3123)

1/4 inch square drive 6.3, DIN 3120

Application:

For adapting a 1/4" internal square drive to a 3/8" external square drive.

Execution:

■ Ball stop



	Material					
Drive	Tip size	Surface	58149 Ident. No.			
			Ident. No.			
1/4 inch	3/8 inch	Chrome plated	010			

Prod. Gr. 582



TORN Bit adapter (DIN 3120)

1/4 inch square drive 6.3, DIN 3120

Application:

Screwdriver adaptation from 1/4" square drive to a 1/4" external square drive

■ Tip size: 1/4 inch

Surface: Plain

■ Material: Chrome-vanadium steel

Technical data:

■ Drive: 1/4 inch

58003	ldent. No.	090

ATORN Bit holder insert with 1/4 inch hexagonal bit mount

1/4 inch square drive 6.3, DIN 3120

Application:

Holder for 1/4 inch hexagonal bits with 1/4 inch square drive

Execution:

- chromium-plated
- Hexagon socket with clamping

Technical data:

■ Drive: 1/4 inch

■ Bit holder: 1/4 inch hexagon ■ Surface: Chrome plated



095 58003... Ident. No.

Prod. Gr. 582

ATORN Extensions (DIN 3123)

1/4 inch square drive 6.3, DIN 3120

Application:

Extension for hand-operated socket wrench inserts with 1/4" square drive

Execution:

polished

Technical data:

- Drive: 1/4 inch ■ Tip size: 1/4 inch
- Outer diameter: 11 mm ■ Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 020

Length (mm)		50	100	150
58227	Ident. No.	010	020	030
		•	•	•

Prod. Gr. 582

ATORN Cardan joints (DIN 3123)

with internal detent 1/4 inch square drive 6.3 DIN 3120

Application:

Cardan joint for screw connections with projecting edges and confined installation areas

Execution:

polished

■ inner lock

Advantage:

• Flexible bending angle for difficult-to-reach installation areas



Drive	Tip size	Surface	Material	3824	58247 Ident. No.	
1/4 inch	1/4 inch	Chrome plated	Chrome-vanadium steel	010	•	

Prod. Gr. 582



Socket set

3/8 inch square drive 10, DIN 3120



Execution:

- Chrome-vanadium steel
- 17 inserts, 6 operating tools
- Hexagons with special profile

Advantage:

Optimum force transmission thanks to special

- Bolt and nut are not damaged
- Higher torques possible
- Two-tone foam inlay ensures any missing tools are instantly detected

Delivery:

In sheet steel box, powder-coated, with two-tone foam inlay and removable recesses

Drive	3/8 inch		
Number of pieces in assortment/set (PCS)	23		
Sockets with hexagon-head tip provided	6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm		
Ratchets provided	3/8-inch square		
Extensions provided		50 mm 75 mm 150 mm	
Cardan joints provided	55 mm		
External dimensions of box		315 x 115 x 43 mm	
58278	011		



DRION® Socket set

with hexagon inserts, 3/8 inch square drive 10 DIN 3120



Execution:

- Chrome-vanadium steel
- Ident. No. 010:
 - Matt chromium-plated
 - 17 inserts, 6 operating tools

■ Ident. No. 100:

- High-quality insertion tools to robust, long-lasting industry-standard specification
- Reversible ratchet with two-component handle and locking button
- Individual parts are securely stored and transported using clamping function



Ref. no. 010



Ref. no. 100

Drive		3/8 inch	3/8 inch	
Number of pieces in assortment	t/set (PCS)	23	61	
Sockets with hexagon-head tip	provided	6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm	6 mm 7 mm 8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 24 mm	
Long sockets with hexagon-hea	d tip provided	-	8 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 17 mm 19 mm	
Sockets with socket hexagon-he	ead tip provided	-	3 mm 4 mm 5 mm 6 mm 7 mm 8 mm 10 mm	
Sockets with socket hexagon he TX tip provided	ead or external	-	TX15 TX20 TX25 TX27 TX30 TX40 TX45 TX50 TX55	
Sockets with cross-head tip pro	vided	-	PH1 PH2 PH3 PZ1 PZ2 PZ3	
Sockets with slotted tip provide	d	-	5.5 mm 7 mm 8 mm	
Ratchets provided		3/8-inch square	3/8-inch square	
Extensions provided		125 mm 250 mm	75 mm 250 mm	
Cross handles provided		170 mm	170 mm	
Cardan joints provided		46 mm	-	
External dimensions of box		270 x 105 x 90 mm	-	
58279 Ident. No.		010 ●	100 ●	

Prod. Gr. 5LB

ATORN Ratchet

3/8 inch square drive 10, DIN 3120



Application:

Ratchet for manual socket wrench inserts and connection parts

Execution:

- Anti-clockwise and clockwise rotation possible using reversing lever with locking button
- finely serrated
- With hanging eyelet

Tip size	3/8 inch			
Length (mm)	190			
Number of teeth (PCS)		72		
Surface	Chrome plated			
Material	Material			
Material of handle		2-component plastic		
58275	ldent. No.	010		
30273	ident. No.	•		

Prod. Gr. 582





GRIPPER universal screwdriving tool (DIN 3120)

3/8 inch square drive 10, DIN 3120











Universal tool for nuts and bolts with external

Execution:

- Alloyed steel housing
- 54 hardened steel pins
- Pins with spring and solid stop

- Torque transfer of up to 80 Nm
- Head height up to 8 mm

Advantage:

- Replaces nuts in the region of 7 to 19 mm
- Independent of imperial or metric sizes
- All geometries such as triangular, square, hexagonal or octagonal, slightly damaged screws, and hook and lug wrenches can be screwed in place

Drive		3/8 inch	
Length (mm)		60	
Surface		Chrome plated	
58007 Ident. No.		010 •	

Prod. Gr. 534



ATORN Socket insert (DIN 3124)

Hexagon, 3/8 inch square drive, 10, DIN 3120



Application:

Socket wrench insert with hexagon and 3/8" square drive

Execution:

polished

Technical data:

■ Drive: 3/8 inch

Width

across

flats 12 mm

13 mm

14 mm

15 mm

16 mm

17 mm

- Tip profile type
- Surface: Chrome plated
- Material: Chrome-vanadium steel

Length

(mm)

27

28

28

30

30

30

Outer Ø

(mm)

18

20

21

22

23

58299..

130

140

150

160

170

•

Ident. No.



Width across flats	Length (mm)	Outer Ø (mm)	58299 Ident. No.
18 mm	30	26	180
19 mm	30	26	190
20 mm	32	27	200
21 mm	32	28	210
22 mm	34	30	220

Width across flats	Length (mm)	Outer Ø (mm)	58299 Ident. No.
6 mm	24	17	060
7 mm	24	17	070
8 mm	24	17	080
9 mm	24	17	090
10 mm	25	17	100
11 mm	26	18	110

Prod. Gr. 582



for external TX screws, 3/8 inch square drive 10 DIN 3120



Application:

socket spanner insert for external TX screws with 3/8 inch square drive.

Technical data:

- Drive: 3/8 inch
- Surface: Chrome plated
- Material: Chrome-vanadium steel

			O.V.
nosemis			
		V	9

Tip size		E5	E6	E7	E8	E10	E11	E12	E14
58356 Ident. No.		050	060	070	080	100	110	120	140
36330	ident. No.	•	•	•	•	•	•	•	•

Prod. Gr. 582

Screwdriver bit (DIN 3120)

for hexagon socket screws, 3/8-inch square drive, 10, DIN 3120



Application:


Screwdriver bit for hexagon socket screws with 3/8" square drive.

Technical data:

■ Drive: 3/8 inch

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel







for internal TX screws, 3/8 inch square drive 10 DIN 3120



Application:

screwdriver bit for internal TX screws with 3/8 inch square drive.

Execution:

- Special steel blades
- Steel grey



■ Drive: 3/8 inch


Outer diameter: 17 mm ■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Tip size		TX20	TX25	TX27	TX30	TX40	TX45	TX50
Length (mm)		43.5	43.5	43.5	43.5	43.5	43.5	44.5
58450	ldent. No.	020	025	027	030	040	045	050

Prod. Gr. 582



3/8 inch square drive 10, DIN 3120



Application:

Ident. No. 010: For adapting a 3/8" internal square drive to a 1/4" external square drive

Ident. No. 020: For adapting a 3/8" internal square drive to a 1/2" external square drive





Ident. No. 020

Ident. No. 010

		Material	Chrome-vana- dium steel
Drive	Tip size		58463 Ident. No.
3/8 inch	1/4 inch	Chrome plated	010
	, ,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
3/8 inch	1/2 inch	Chrome plated	020

Prod. Gr. 582



3/8 inch square drive 10, DIN 3120



Application:

Extension for hand-operated socket wrench inserts with 3/8" square drive

Execution:

- polished
- Rigid version Length (mm)

Technical data:

- Drive: 3/8 inch
- Tip size: 3/8 inch
- Outer diameter: 17 mm Surface: Chrome plated
- Material: Chrome-vanadium steel

ATORNO SOURCES	n

50 75 125 150 250 020 030 050 010 040

58510... Prod. Gr. 582



ATORN Cardan joints (DIN 3123)

Ident. No.

3/8 inch square drive 10, DIN 3120



Application:

Cardan joint for screw connections with projecting edges and confined installation areas

Advantage:

• Flexible bending angle for difficult-to-reach installation areas

Execution:

polished

Drive				3/8 inch
Tip size				3/8 inch
Surface				Chrome plated
	Length (mm)	Material		
58530	46	Chrome-vanadium steel	ldent. No.	010

Prod. Gr. 582





with hexagon, hexagon socket and TX inserts, 1/2 inch square drive, 12.5, DIN 3120



Execution:

- Chrome-vanadium steel
- Hexagon with special profile
- 1/2" square drive

Advantage:

- Optimum force transmission thanks to special
- Bolt and nut are not damaged
- Higher torques possible

- Two-tone polyethylene foam inlay ensures any missing tools are instantly detected
- Oil and chemical-resistant foam inlay

In powder-coated steel case with polyethylene foam inlay









Ident. No. 011 19 pieces

Ident. No. 021 22 pieces

Ident. No. 031 35 pieces

Ident. No. 041 21 pieces

Drive		1/2 inch	1/2 inch	1/2 inch	1/2 inch
Number of pieces in assortmen	nt/set (PCS)	19	22	35	21
Sockets with hexagon-head tip provided		10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm	10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 22 mm 24 mm 27 mm 30 mm 32 mm	10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 23 mm 24 mm 27 mm 30 mm 32 mm	-
Sockets with socket hexagon-head tip provided		-	-	7 mm 8 mm 10 mm 12 mm 14 mm	-
Sockets with socket hexagon head or external TX tip provided		-	-	TX30 TX40 TX45 TX55 TX60	TX20 TX25 TX27 TX30 TX40 TX45 TX50 TX55 TX60 E10 E11 E12 E14 E16 E18 E20 E22 E24
Sockets with cross-head tip pro	ovided	-	-	PH3 PH4	-
Ratchets provided		1/2-inch square	1/2-inch square	1/2-inch square	1/2-inch square
Extensions provided		125 mm 250 mm	125 mm 250 mm	125 mm 250 mm	125 mm 250 mm
Cross handles provided		300 mm	-	=	_
Cardan joints provided		75 mm	75 mm	75 mm	-
58574	Ident. No.	011 •	021 •	031 •	041 •

Prod. Gr. 582

DRION Socket sets

with hexagon inserts, 1/2 inch square drive 12.5 DIN 3120



Execution:

■ Chrome-vanadium steel

■ Matt chromium-plated

• Ident. No. 010: 11 inserts, 2 operating tools

■ Ident. No. 050: 19 inserts, 5 operating tools

Delivery:

In painted metal case

Drive		1/2 inch	1/2 inch
Number of pieces in assortment	/set (PCS)	13	24
Sockets with hexagon-head tip provided		8 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 19 mm 22 mm	8 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 19 mm 21 mm 22 mm 23 mm 24 mm 26 mm 27 mm 28 mm 30 mm
Ratchets provided		1/2-inch square	1/2-inch square
Extensions provided	Extensions provided		125 mm 250 mm
Cardan joints provided		-	70 mm
External dimensions of box		320 x 150 x 50 mm	450 x 200 x 50 mm
58575	ldent. No.	010	050



Ref. no. 010



Ref. no. 050

Prod. Gr. 5LB

ORION® Socket sets

with hexagon inserts, 1/2 inch square drive 12.5 DIN 3120



Execution:

- Chrome-vanadium steel
- Ident. No. 200: Ratchet with 2-component handle and locking button
- Ident. No. 300:
- Hexagon socket driver lengths: 55, 100, 140 and 200 mm
- In length 55 mm: Width across flats 5, 6, 7, 8, 10, 12, 14, 17, 19 mm
- In length 100 mm: Width across flats 5, 6, 7, 8, 10, 11, 12, 13 mm
- In length 140 mm: Width across flats 5, 6, 7, 8, 10, 12, 14 mm
- In length 200 mm: Width across flats 5, 6, 7, 8, 10, 12 mm

Advantage:

- High-quality insertion tools to robust, long-lasting industry-standard specification
- Individual parts are securely stored and transported using clamping function
- Any missing tools are instantly detected thanks to size-related tool recesses

Drive	1/2 inch	1/2 inch
Number of pieces in assortment/set (PCS)	25	30
Sockets with hexagon-head tip provided	10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 20 mm 21 mm 22 mm 23 mm 24 mm 27 mm 30 mm 32 mm	-
Long sockets with hexagon-head tip provided	16 mm 21 mm	-
Sockets with socket hexagon-head tip provided	-	5 mm 6 mm 7 mm 8 mm 10 mm 11 mm 12 mm 13 mm 14 mm 17 mm 19 mm
Ratchets provided	1/2-inch square	-
Extensions provided	125 mm 250 mm	-
Cross handles provided	300 mm	-
Cardan joints provided	70 mm	-
58575 Ident. No.	200 •	300 •



Ref. no. 200



Ref. no. 300

Prod. Gr. 5LB

ATORN

Reversible ratchets: Fine-tooth ratchet and telescopic ratchet

reversible 1/2 inch square drive, 12.5, DIN 3120



Application:

Ident. No. 010, 070: Ratchet for hand-operated socket wrench inserts and connection parts with 1/2" square drive.

Ident. No. 060: ratchet for hand-operated socket wrench inserts and connection parts with 1/2" square drive.

Execution:

■ Ident. No. 010: With hanging eyelet

- Ident. No. 010, 070: Anti-clockwise and clockwise rotation possible using reversing lever with locking button
- Ident. No. 010-060: finely serrated
- Ident. No. 060:
- telescopic function: can be extended from 305 to 445 mm
- ratcheting/clamping function
- anti-clockwise and clockwise rotation possible using reversing lever with locking button
- Ident. No. 070:

- Telescopic function: Can be extended from 457 to 600 mm
- Ratcheting/clamping function
- Finely serrated

Technical data:

- Tip size: 1/2 inch
- Number of teeth: 72 PCS
- Surface: Chrome plated
- Material: Chrome-vanadium steel
- Material of handle: 2-component plastic



Ident. No. 010



Ident. No. 060



Ident. No. 070







Length (mm)		255	445	600
50574	Ident No	010	060	070
56570	Ident. No.	•	•	•

Prod. Gr. 582



reversible 1/2 inch square drive, 12.5, DIN 3120

Execution:

■ Anti-clockwise and clockwise rotation possible using reversing lever with locking button

Technical data:

■ Tip size: 1/2 inch

■ Length: 250 mm

■ Number of teeth: 72 PCS

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel

■ Material of handle: 2-component plastic



500 58899... Ident. No.

Prod. Gr. 5LB



Socket insert (DIN 3124)

Hexagon, 1/2 inch square drive, 12.5, DIN 3120



Technical data:

■ Drive: 1/2 inch

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Width across flats	Length (mm)	Outer Ø (mm)	58590 Ident. No.
8 mm	38	22	080
9 mm	38	22	090
10 mm	38	22	100
11 mm	38	22	110
12 mm	38	22	120
13 mm	38	22	130
14 mm	38	22	140
15 mm	38	23	150

Width across flats	Length (mm)	Outer Ø (mm)	58590 Ident. No.
16 mm	38	24	160
17 mm	38	25	170
18 mm	38	25	180
19 mm	38	27	190
20 mm	38	28	200
21 mm	38	29	210
22 mm	42	30	220
23 mm	42	30	230

Width across flats	Length (mm)	Outer Ø (mm)	5859 Ident.	
24 mm	42	32	240	•
26 mm	42	34	260	•
27 mm	45	36	270	•
28 mm	45	38	280	•
30 mm	45	39	300	•
32 mm	47	42	320	•

Prod. Gr. 582



ATORN Socket insert (DIN 3124)

long version, bi-hexagon, 1/2 inch square drive, 12.5, DIN 3120



Application:

Socket wrench insert with bi-hexagon and 1/2" square drive

Execution:

■ Long version

Technical data:

■ Drive: 1/2 inch

■ Tip profile type: ENERGY profile

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



	Width across flats	Length (mm)	Outer Ø (mm)	58627 Ident. No.	
Ī	10 mm	77	22.5	100	•
	11 mm	77	22.5	110	•
	12 mm	77	22.5	120	•
	13 mm	77	22.5	130	•
	14 mm	77	22.5	140	•
	15 mm	77	22.5	150	•

Prod. Gr. 582

Width across flats	Length (mm)	Outer Ø (mm)	58627 Ident. No.
16 mm	77	24	160
17 mm	77	23	170
18 mm	82	24	180
19 mm	82	25	190
20 mm	82	30	200
21 mm	82	30	210

Width	Length	Outer Ø	58627	
across	(mm)	(mm)	Ident. No.	
flats				
22 mm	82	31	220	
24 mm	82	32	240	
26 mm	82	34	260	
27 mm	82	37	270	
30 mm	82	41	300	
32 mm	82	42	320	



for external TX screws, 1/2 inch square drive, 12.5 DIN 3120



socket spanner insert for external TX screws with 1/2 inch square drive

Execution:

Knurled

Advantage:


■ Good grip thanks to knurling

Technical data:

■ Drive: 1/2 inch

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Prod. Gr. 582



for slotted screws, 1/2 inch square drive 12.5 DIN 3120



Execution:

- With ball-securing groove
- Burnished tips

Advantage:

■ Improved resistance to corrosion thanks to burnishing process

Technical data:

■ Drive: 1/2 inch ■ Length: 60 mm

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel

Thickness of cutting	ng edge (mm)	1.2	1.6	2.0	2.5
Width of cutting ed	dge (mm)	8.0	10.0	12.0	14.0
58674	ldent. No.	010 •	015 •	030	040 •

Prod. Gr. 582



Screwdriver bits

for Phillips screws



Technical data:

- Drive: 1/2 inch
- Length: 60 mm

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel

Tip size		PH2	PH3	PH4	PZ2	PZ3	PZ4
50670	Ident. No.	020	030	040	120	130	140
580/8	ident. No.	•					

Prod. Gr. 582



Ident. No. 020-040



Ident. No. 120-140



ATORN Screwdriver bit

for hexagon socket screws, 1/2 inch square drive 12.5 DIN 3120



Screwdriver bit for hexagon socket screws with 1/2" square drive

Execution:

- Short version
- Burnished drive

Technical data:

- Drive: 1/2 inch
- Length: 55 mm
- Outer diameter: 25 mm
- Surface: Chrome plated


■ Material: Chrome-vanadium steel



Advantage:

■ Improved resistance to corrosion thanks to burnishing process

Width acros	s flats	4 mm	5 mm	6 mm	7 mm	8 mm	9 mm	10 mm	12 mm	14 mm	17 mm	19 mm
58682	Ident. No.	040 •	050 •	060	070 •	080	090 •	100	120 •	140	170 •	190 •



for hexagon socket screws, 1/2 inch square drive 12.5 DIN 3120



Application:

Ident. No. 300: Selection of various screwdriver bits for hexagon socket screws with 1/2" square

Ident. No. 310: Selection of various screwdriver bits for hexagon socket screws and operating tools with 1/2" square drive

Execution:

- Chrome-vanadium steel
- Short version
- Ident. No. 310: With reversible lever and 1/2" extension

Delivery:

In metal case with soft foam inlay

Drive		1/2 inch	1/2 inch
Number of pieces in assortment	t/set (PCS)	9	11
		5 mm 6 mm 7 mm 8 mm	5 mm 6 mm 7 mm 8 mm
Sockets with socket hexagon-he	ead tip provided	9 mm 10 mm 12 mm	9 mm 10 mm 12 mm
_		14 mm 17 mm	14 mm 17 mm
Ratchets provided		-	1/2-inch square
Extensions provided		-	250 mm
58682 Ident. No.		300 •	310 •

Prod. Gr. 582



Ident. No. 300



Ident. No. 310

ATORN Screwdriver bit

for internal TX screws, 1/2 inch square drive, 12.5 DIN 3120



Execution:

■ No. 58755: Long version

Technical data:

■ Drive: 1/2 inch

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



No. 58754



No. 58755

Tip size				TX20	TX25	TX27	TX30	TX40	TX45	TX50	TX55	TX60
Outer Ø (m	m)			22.7	22.7	22.7	22.7	22.7	22.7	22.7	23.7	23.7
		Length (mm)										
58754	Short version	55	ldent. No.	020 •	025 •	027 •	030	040 •	045 •	050 •	055 •	060 •
58755	Long version	110	Ident. No.	020	025 •	027 •	030	040	045 •	050 •	055 •	060

Prod. Gr. 582

ATORN Adapters (DIN 3123)

1/2 inch square drive 12.5, DIN 3120

Application:

Ident. No. 010: For adapting a 1/2" internal square drive to a 3/8" outside square drive.

Ident. No. 020: For adapting a 1/2" internal square drive to a 3/4" outside square drive.

- Drive: 1/2 inch
- Surface: Chrome plated





Ident. No. 010

Ident. No. 020

Tip size		3/8 inch	3/4 inch
58782	ldent. No.	010 •	020 •



1/2 inch square drive 12.5, DIN 3120

Application:

Extension for hand-operated socket wrench inserts with 1/2" square drive.

Technical data:

■ Drive: 1/2 inch

■ Tip size: 1/2 inch

Outer diameter: 23 mm

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Length (mm)		75	125	250
58842	ldent. No.	010 •	020 •	030

Prod. Gr. 582



Cardan joints (DIN 3123)

1/2 inch square drive 12.5, DIN 3120



Application:

Cardan joint for screw connections with projecting edges and confined installation areas.

■ Tip size: 1/2 inch ■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Technical data:

■ Drive: 1/2 inch

	Length (mm)		
58858	75	ldent. No.	010 •

Prod. Gr. 582



Socket set

Hexagon, 3/4 inch square drive 20 DIN 3120



- Chrome-vanadium steel
- Chrome-plated
- Hexagon inserts with knurling

■ Reversible ratchet with maximum torque of 2000 Nm

Delivery:

In lacquered metal case

Drive	3/4 inch		
Sockets with hexagon-head tip provided		22 mm 24 mm 27 mm 30 mm 32 mm 36 mm 38 mm 41 mm 46 mm 50 mm 55 mm 60 mm	
Ratchets provided		3/4-inch square	
Extensions provided		200 mm 400 mm	
Cross handles provided	500 mm		
58902	Ident. No.	100 •	

Prod. Gr. 582



ATORN Hexagon key, L-shaped, short version (ISO 2936)

(Hex keys)



Execution:

■ Chrome-vanadium steel

Advantage:

■ Better resistance to corrosion



		Design	Short
Width across flats	Limb length x limb length 2	Surface	52114 Ident. No.
0.7 mm	33 x 7 mm	Burnished	470
0.9 mm	33 x 11 mm	Burnished	480
1.3 mm	41 x 13 mm	Nickel plated	490
1.5 mm	46.5 x 15.5 mm	Nickel plated	500
2 mm	52 x 18 mm	Nickel plated	510
2.5 mm	58.5 x 20.5 mm	Nickel plated	520
3 mm	66 x 23 mm	Nickel plated	530
4 mm	74 x 29 mm	Nickel plated	540
5 mm	85 x 33 mm	Nickel plated	550 ●
6 mm	96 x 38 mm	Nickel plated	560 ●

		Design	Short
Width across flats	Limb length x limb	Surface	52114
	length 2		ldent. No.
7 mm	102 x 41 mm	Nickel plated	570
8 mm	108 x 44 mm	Nickel plated	580
9 mm	114 x 47 mm	Nickel plated	590
10 mm	122 x 50 mm	Nickel plated	600
11 mm	129 x 53 mm	Nickel plated	610
12 mm	137 x 57 mm	Nickel plated	620
14 mm	154 x 70 mm	Nickel plated	630
17 mm	177 x 80 mm	Nickel plated	640
19 mm	199 x 89 mm	Nickel plated	650
22 mm	222 x 102 mm	Nickel plated	660

		Design		Short
Width across flats	Limb length x limb	Surface	5211	4
	length 2		Ident.	No.
24 mm	248 x 114 mm	Nickel plated	665	•
27 mm	277 x 127 mm	Nickel plated	670	•
30 mm	315 x 142 mm	Nickel plated	675	•

		Design	Short
Width across flats	Limb length x limb	Surface	52114
	length 2		Ident. No.
32 mm	347 x 157 mm	Nickel plated	680
36 mm	391 x 176 mm	Nickel plated	685 ●

Prod. Gr. 5HG

ATORN Hexagon key, L-shaped, long version (ISO 2936)



Execution:

■ Chrome-vanadium steel

Technical data:

■ Surface: Nickel plated

■ Better resistance to corrosion

Advantage:

■ Excellent material strength

	Design	Long
Width across flats	Limb length x limb length 2	52116 Ident. No.
1.5 mm	91.5 x 15.5 mm	500
2 mm	102 x 18 mm	510
2.5 mm	114.5 x 20.5 mm	520 •
3 mm	129 x 23 mm	530
4 mm	144 x 29 mm	540
5 mm	165 x 33 mm	550 ●
6 mm	186 x 38 mm	560 ●
7 mm	197 x 41 mm	570 ●
8 mm	208 x 44 mm	580

1.0 11111	, 1.0 x 10.0 111111	000	_
2 mm	102 x 18 mm	510	•
2.5 mm	114.5 x 20.5 mm	520	•
3 mm	129 x 23 mm	530	•
4 mm	144 x 29 mm	540	•
5 mm	165 x 33 mm	550	•
6 mm	186 x 38 mm	560	•
7 mm	197 x 41 mm	570	•
8 mm	208 x 44 mm	580	•
Prod Cr 5HC			

Prod. Gr. 5HG



	Design	Long
Width across flats	Width across flats Limb length x limb length 2	
		Ident. No.
9 mm	219 x 47 mm	590
10 mm	234 x 50 mm	600
11 mm	247 x 53 mm	610
12 mm	262 x 57 mm	620
14 mm	294 x 70 mm	630
17 mm	337 x 80 mm	640
19 mm	379 x 89 mm	650 ●
22 mm	422 x 102 mm	660

ATORN L-shaped hex key sets

(Hex keys)



Execution:

■ Chrome-vanadium steel

Advantage:

- Excellent material strength
- Better resistance to corrosion



■ Surface: Nickel plated



No. 52114 705-52114 725



No. 52114 800, 52116 805



No. 52116 705-52116 715

Width across flats			2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm	2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm	2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm 12 mm 14 mm	
Number of pieces in asso	ortment/set (PCS)			6	8	10
		Design				
52114	In plastic bag	Short	Ident. No.	705 •	715 •	725 •
52114	In long version bag	Short	Ident. No.	-	800 •	-
52116	In plastic bag	Long	ldent. No.	705 ●	715 ●	-
52116	In long version bag	Long	Ident. No.	-	805 •	-

Prod. Gr. 5HG

DRION Hexagon key, L-shaped

(Hexagon key, L-shaped), inches



Execution:

- Imperial dimensions
- Chrome-vanadium steel

Advantage:

■ Excellent material strength

■ Better resistance to corrosion

Technical data:

■ Surface: Nickel plated



	Design	Short
Width across flats	Limb length x limb length 2	52118
		Ident. No.
0.05 inch	47 x 13 mm	010
1/16 inch	47 x 16 mm	020
5/64 inch	52 x 18 mm	030
3/32 inch	58 x 22 mm	040
1/8 inch	66 x 23 mm	050
9/64 inch	72 x 26 mm	055
5/32 inch	74 x 29 mm	060
3/16 inch	85 x 33 mm	070
7/32 inch	91 x 36 mm	080

	Design		Short
Width across flats	Limb length x limb length 2		8
		Ident.	No.
1/4 inch	96 x 38 mm	090	•
5/16 inch	108 x 44 mm	110	•
3/8 inch	122 x 50 mm	120	•
1/2 inch	145 x 63 mm	140	•
9/16 inch	154 x 69 mm	150	•
5/8 inch	176 x 76 mm	160	•
3/4 inch	199 x 89 mm	170	•
7/8 inch	222 x 102 mm	180	•
1 inch	275 x 125 mm	190	•

Prod. Gr. 534

ATORN Screwdriver sets In foldaway handheld case





Ident. No. 100-110: For hexagon socket screws. Ident. No. 120: for internal TX screws.

Execution:

- Screwdriver blades made from chrome-vanadium
- Two-component foldaway holder with lifting device

■ Ident. No. 120: Steel grey



■ Better resistance to corrosion







Ident. No. 110

Ident. No. 120

Number of pieces in assortment/set		7	7	8
Tip size		-	-	TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40
Width across flats		1.5 mm 2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm	2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm	-
Surface		Nickel plated	Nickel plated	-
52130	ldent. No.	100	110	120 •

Prod. Gr. 5HG

ATORN Hexagonal screwdriver with T-handle

with 2-component handle



- Easy-grip soft coating for optimum power transmission
- Hard core for lasting blade/handle connection even under the highest loads
- Blade made of CrV and CrMV (special alloy)
- Optimum performance data up to 100% above the DIN values
- Matt chrome-plated blade with black tip

Technical data:

■ Surface: Chrome plated



Ident. No. 760

Width across flats	Blade length (mm)	52139 Ident. No.
2 mm	100	700 •
2.5 mm	100	710
3 mm	80	720
3 mm	100	722
3 mm	200	726 •
4 mm	100	730
4 mm	150	732

4 mm	15
Prod. Gr. 5HG	

Width across flats	Blade length (mm)	52139 Ident. No.
4 mm	200	734
5 mm	100	740
5 mm	150	742
5 mm	200	744
6 mm	100	750 •
6 mm	150	752 •
6 mm	200	754 ●

Width across flats	Blade length (mm)	52139 Ident. No.
8 mm	100	760
8 mm	150	762 •
8 mm	200	764
10 mm	100	770
10 mm	200	772



ATORN Hexagonal screwdriver set with T-handle

with 2-component handle




Execution:

- Comfortable non-slip soft coating provides for optimal power transmission
- Hard core for lasting blade/handle connection even under the highest loads
- Blade made of special CrV and CrMV alloy
- Optimal performance data up to 100% above DIN values
- Matt chrome-plated blade with Black-Tip
- Blade lengths: 2x100 mm/2.5x100mm/3x100 mm/4x150 mm/5x150 mm/6x200 mm/8x200

52139	Ident. No.	810 •
Dund Cu ELIC		

Prod. Gr. 5HG



ATORN Hexagon screwdriver with ball head and T-handle

with 2-component handle


Execution:

- Easy-grip soft coating for optimum power transmission
- Hard core for lasting blade/handle connection even under the highest loads
- Blade made of CrV and CrMV (special alloy)
- Optimal performance data up to 100 % above DIN values
- Matt chrome-plated blade with black tip

Technical data:

■ Surface: Chrome plated

Width across flats	Blade length (mm)	5213 Ident.	
3 mm	100	803	•
4 mm	100	804	•
5 mm	100	805	•
6 mm	125	806	•
8 mm	150	808	•





Prod. Gr. 5HG

T-handle screw tool kit in workshop stand

Hexagon socket and drive



For installation on a workbench or tool trolley

Execution:

- Robust and stable plastic workshop stand
- Equipped with 7 tools with the most common widths across flats
- Ergonomically shaped two-component T-handles
- 4x hexagon socket 3, 4, 5 and 6 mm/3x hexagon drive 8, 10, 13 mm

- 1 each of T-handle hexagon socket screwdriver in sizes 3, 4, 5 and 6 mm, each with 150 mm blade length - 1 each of T-handle hexagon screwdriver in sizes 8, 10 and 13 mm, each with 230 mm blade length

Technical data:

- Number of pieces in assortment/set: 7 PCS
- Width across flats: 3 mm | 4 mm | 5 mm | 6 mm | 8 mm | 10 mm | 13 mm
- Surface: Chrome plated



Prod. Gr. 5HG



ATORN Hexagonal screwdriver

straight



- Blade made of chrome-vanadium steel
- Continuously hardened
- Rounded front edges
- With hanging eyelet

Advantage:

■ Ergonomic handle for comfortable handling

- Makes it easier to insert the blade thanks to the rounded front edges
- Better resistance to corrosion

Technical data:

■ Surface: Nickel plated





Width	Blade	Length	52139
across flats	length (mm)	(mm)	Ident. No.
Hato			
2 mm	100	125	500 ●
2.5 mm	100	125	510
3 mm	100	125	520 •
3 mm	150	175	530
3 mm	200	225	535 ●
4 mm	100	125	540
4 mm	150	175	550

Width across flats	Blade length (mm)	Length (mm)	5213 Ident.	
4 mm	200	225	555	•
5 mm	100	132	560	•
5 mm	150	182	570	•
5 mm	200	232	575	•
6 mm	100	132	580	•
6 mm	150	182	590	•
6 mm	200	232	595	•

Width across flats	Blade length (mm)	Length (mm)	5213 Ident.	
8 mm	100	132	600	•
8 mm	150	182	610	•
8 mm	200	232	615	•
10 mm	100	139	620	•
10 mm	200	239	625	•

Prod. Gr. 5HG

ATORN Hexagonal screwdriver set

straight, with ergonomic T-handle



Execution:

- Blade made of chrome-vanadium steel
- Continuously hardened
- Rounded front edges
- With hanging eyelet
- Blade lengths: 2x100 mm/2.5x100mm/3x100 mm/4x150 mm/5x150 mm/6x200 mm/8x200

Advantage:

- Ergonomic handle for comfortable handling
- Makes it easier to insert the blade thanks to the rounded front edges
- Better resistance to corrosion



Width across flats		2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm
Surface		Nickel plated
52139	ldent. No.	800 •

Prod. Gr. 5HG



ATORN Hexagon key, L-shaped

long version, short arms



Execution:

- Hexagonal ball end on the long wrench side
- Shorter arm bent by 100°
- Chrome-vanadium steel
- Hardened
- Chrome-plated

Advantage:

- Ball end enables screws to be tightened at angles of up to 25°
- Bent arm provides better accessibility
- Wrench is easy to remove

Delivery:

In functional plastic holder

Width across flats			1.5 mm 2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm
Surface			Nickel plated
	Design		
52137	Long Offset at 100 degrees	Ident. No.	200 •

Prod. Gr. 5HG



TORN Hexagon key, L-shaped

long version, short arms



- Hexagonal ball head on the long wrench side
- Shorter arm bent by 100°
- Chromium-vanadium steel
- Hardened
- chromium-plated

Advantage:

- Ball head enables screws to be tightened at angles of up to 25°
- bent arm provides better accessibility

Technical data:

■ Surface: Chrome plated

	Design	Long
Width across flats	Limb length x limb length 2	52137 Ident. No.
		ident. No.
1.5 mm	90 x 7.5 mm	315
2 mm	100 x 8 mm	320
2.5 mm	112 x 10.5 mm	325
3 mm	127 x 13 mm	330
4 mm	144 x 15 mm	340

Wath doloop hate	Elinib length x limb length 2	ldent.	
1.5 mm	90 x 7.5 mm	315	•
2 mm	100 x 8 mm	320	•
2.5 mm	112 x 10.5 mm	325	•
3 mm	127 x 13 mm	330	•
4 mm	144 x 15 mm	340	•

Design	Long
Limb length x limb length 2 52137	
	Ident. No.
165 x 18 mm	350 ●
185 x 22 mm	360 ●
208 x 27 mm	380
232 x 32 mm	400
	Limb length x limb length 2 165 x 18 mm 185 x 22 mm 208 x 27 mm

Prod. Gr. 5HG

FOR MORE DETAILS OR PRODUCTS	PLEASE VISIT	OUR ONLINE SH	OP WWW.HAHN-KOLB.COM



ATORN L-shaped hex key set

long version, coloured paint



Execution:

- Hexagonal ball end on the long wrench side
- Coated with wearproof powder paint
- Chrome-vanadium steel
- Hardened

Advantage:

- Ball end enables screws to be tightened at angles of up to 25°
- Colour coating ensures instant identification of the wrench size
- Wrench is easy to remove

Delivery:

In functional plastic holder

Width across flats			1.5 mm 2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm
Surface		Lacquered	
	Design		
52139	Long	Ident. No.	001 •





ATORN Hexagon key, L-shaped

long version, coloured paint



- Hexagonal ball head on the long wrench side
- Coated with wearproof powder paint
- Chromium-vanadium steel
- Hardened

Advantage:

- Ball head enables screws to be tightened at angles of up to 25°
- Colour coating ensures instant identification of the wrench size

Technical data:

■ Surface: Lacquered

	Design	Long
Width across flats	Limb length x limb length 2	52139
		Ident. No.
1.5 mm	91.5 x 15.5 mm	215
2 mm	102 x 18 mm	220
2.5 mm	114.5 x 20.5 mm	225
3 mm	129 x 23 mm	230
4 mm	144 x 29 mm	240
5 mm	165 x 33 mm	250
6 mm	186 x 38 mm	260
8 mm	208 x 44 mm	280
10 mm	234 x 50 mm	300

Prod. Gr. 5HG

Ident. No. 220 Ident. No. 240 Ident. No. 280

ATORN L-shaped hex key set

long version



Application:

For tightening and loosening hexagon-socket screws

- Hexagonal ball end on the long wrench side
- Chrome-vanadium steel
- Hardened

Advantage:

- Ball end enables screws to be tightened at angles of up to 25°
- Better resistance to corrosion
- Wrench is easy to remove

In functional plastic holder

Width across flats			1.5 mm 2 mm 2.5 mm 3 mm 4 mm 5 mm 6 mm 8 mm 10 mm
Surface			Nickel plated
	Design		
52139	Long	Ident. No.	900

Prod. Gr. 5HG









Execution:

- Hexagonal ball end on the long wrench side
- Chrome-vanadium steel
- Hardened



Advantage:

- Ball end enables screws to be tightened at angles
- Better resistance to corrosion

Technical data:

Surface: Nickel plated

	Design		Long
Width across flats	Limb length x limb length 2	5213	9
		Ident.	No.
1.5 mm	91.5 x 15.5 mm	015	•
2 mm	102 x 18 mm	020	•
2.5 mm	114.5 x 20.5 mm	025	•
3 mm	129 x 23 mm	030	•
4 mm	144 x 29 mm	040	•

	Design		Long
Width across flats	Limb length x limb length 2	5213	9
		ldent.	No.
5 mm	165 x 33 mm	050	•
6 mm	186 x 38 mm	060	•
8 mm	208 x 44 mm	080	•
10 mm	234 x 50 mm	100	•
12 mm	262 x 57 mm	120	•

Prod. Gr. 5HG

ATORN L-shaped hex key set

With hold function



Execution:

- Pro-Hold ball holds screws securely and is not magnetic
- Does not wear off or cause corrosion in the screw
- Milled ball head ensures maximum stability and precise width across flats
- Specially hardened Protanium steel for very high torques
- Environmentally friendly, extremely corrosion-resistant Tuff-Kote surface,
- In a matt, anti-glare, steel grey finish
- Handy and solvent-resistant
- Easy key removal thanks to practical, hinged plastic holder

Technical data:

■ Width across flats: 1.5 mm | 2 mm | 2.5 mm | 3 mm | 4 mm | 5 mm | 6 mm | 8 mm | 10 mm

900

■ Surface: Chrome plated



52138	Ball head, hold function	ldent. No.	

Prod. Gr. 5HG

Hexagon key, L-shaped

With hold function

Execution:

- Pro-Hold ball holds screws securely and is not magnetic
- Does not wear off or cause corrosion in the screw
- Milled ball head ensures maximum stability and precise width across flats
- Specially hardened Protanium steel for very high torques
- Environmentally friendly, extremely corrosion-resistant Tuff-Kote surface,
- In a matt, anti-glare, steel grey finish
- Handy and solvent-resistant

Technical data:

■ Surface: Chrome plated



Width across flats	Limb length x limb length 2	52138	
		Ident.	No.
1.5 mm	77 x 14 mm	915	•
2 mm	82 x 16 mm	920	•
2.5 mm	88 x 17 mm	925	•
3 mm	98 x 19 mm	930	•
4 mm	110 x 22 mm	940	•

1.5 mm	77 x 14 mm	915	•
2 mm	82 x 16 mm	920	•
2.5 mm	88 x 17 mm	925	•
3 mm	98 x 19 mm	930	•
4 mm	110 x 22 mm	940	•

Width across flats	Limb length x limb length 2	5213	8
		Ident.	No.
5 mm	119 x 27 mm	950	•
6 mm	139 x 31 mm	960	•
8 mm	152 x 35 mm	980	•
10 mm	171 x 39 mm	990	•

Prod. Gr. 5HG



ATORN Hexagon screwdrivers with ball head straight





- Hexagon ball end
- Blade made of chrome-vanadium steel
- Hardened
- 3-component power grip, with large soft area

• 3-component power grip with large soft area for comfortable use and fatigue-free working

Technical data:

- Design: Straight
- Surface: Chrome plated

■ Ball end enables screws to be tightened at angles of up to 30°

Width across flat	ts	2 mm	2.5 mm	3 mm	4 mm	5 mm	6 mm	8 mm	10 mm
Blade length (mn	n)	75	100	100	100	100	125	150	150
Length (mm)		157	182	192	192	202	227	263	263
52134	ldent. No.	021	026	031	041	051	061	081	101
52 134	ident. No.	•	•	•	•	•	•	•	•

Prod. Gr. 5HG

ATORN Hexagon screwdriver set with ball head

straight




Execution:

- Hexagon ball head
- Blade made of chrome-vanadium steel
- Hardened

Advantage:

- Ball end enables screws to be tightened at angles of up to 30°
- 3-component power grip with large soft area for comfortable use and fatigue-free working

Number of pieces in assortment/set (PCS)		5
Width across flats		3 mm 4 mm 5 mm 6 mm 8 mm
Surface		Chrome plated
52134	ldent. No.	201 •





Prod. Gr. 5HG



ATORN L-shaped TX key set

for internal TX screws, coloured paint



Execution:

- TX ball head on the long wrench side
- Chrome-vanadium steel
- Coated with wearproof powder paint
- Hardened

Advantage:


- Colour powder coating ensures instant identification of wrench sizes
- Ball end also enables slightly slanted screw connections in hard-to-reach areas

Delivery:

In functional plastic holder

Tip size		TX9 TX10 TX15 TX20 TX25 TX27	
		TX30 TX40	
Surface		Lacquered	
Number of pieces in assortment/set		8	
52146	Ident. No.	150 •	





for internal TX screws, coloured paint



Execution:

- TX ball head on the long wrench side
- Chromium-vanadium steel
- Coated with wearproof powder paint
- Hardened

Advantage:


- Colour powder coating ensures instant identification of wrench sizes
- Ball end also enables slightly slanted screw connections in hard-to-reach areas

Technical data:

■ Surface: Lacquered


Tip size	Limb length x limb length 2	h 2 52146	
		Ident. No.	
TX9	59 x 9 mm	709	
TX10	65 x 20 mm	710	
TX15	75.5 x 20 mm	715	
TX20	84 x 21 mm	720	
TX25	100.5 x 22.5 mm	725	
TX27	111.5 x 25.5 mm	727	
TX30	125 x 30 mm	730 ●	
TX40	139 x 33 mm	740	

Prod. Gr. 5HG





Ident. No. 740



for internal TX screws



Execution:

■ Chrome-vanadium steel

Hardened

■ Steel grey

Delivery:

In plastic slide box

Tip size		TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40
Number of pieces in assortment/set		8
52146	Ident. No.	200

Prod. Gr. 5HG







Execution:

- Made from chrome-vanadium steel, hardened
- Steel grey surface
- Wear-resistant industrial quality

Technical data:

Surface: Burnished



Ident. No. 630

Tip size	Limb length x limb length 2	52146 Ident. No.
TX6	44 x 18 mm	606
TX7	50 x 18 mm	607
TX8	51 x 19 mm	608
TX9	51 x 19 mm	609
TX10	54 x 20 mm	610
TX15	57 x 22 mm	615
TX20	61 x 23 mm	620
TX25	65 x 25 mm	625

Tip size	Limb length x limb length 2	52146 Ident. No.
TX27	70 x 27 mm	627
TX30	76 x 30 mm	630
TX40	83 x 33 mm	640
TX45	91 x 37 mm	645
TX50	104 x 41 mm	650 ●
TX55	120 x 47 mm	655
TX60	134 x 52 mm	660



for internal TX screws, extra-long version



Execution:

■ Chrome-vanadium steel

Hardened


■ Steel grey

Delivery:

In plastic clip

Tip size		TX5 TX6 TX7 TX8 TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40 TX50		
Number of pieces in assortment/set	13			
52146	Ident. No.	300 •		





for internal TX screws, extra-long version



Execution:

■ Chromium-vanadium steel

Tip size TX5

Hardened

■ Steel grey

Limb length x limb length 2	52146
	Ident. No.
72 x 13 mm	805
80 x 15 mm	806 ●
88 x 18 mm	807
101 x 20 mm	808
111 01	000

TX6	80 x 15 mm	806	•
TX7	88 x 18 mm	807	•
TX8	101 x 20 mm	808	•
TX9	111 x 21 mm	809	•
TX10	121 x 23 mm	810	•
TX15	136 x 27 mm	815	•
Prod Gr 5HG			

Prod. Gr. 5HG

Technical data:

■ Surface: Burnished

Tip size	Limb length x limb length 2	52146 Ident. No.
TX20	148 x 29 mm	820
TX25	163 x 33 mm	825
TX27	170 x 36 mm	827 •
TX30	178 x 38 mm	830
TX40	188 x 43 mm	840
TX50	200 x 50 mm	850

ATORN L-shaped TX key set

for internal TX screws, with borehole in the drive tip



Execution:

Chrome-vanadium steel Hardened

■ Steel grey

■ For TX safety screws

Delivery:

In plastic clip

Tip size		TX9 TX10 TX15 TX20 TX25 TX27 TX30 TX40		
Number of pieces in assortment/set	8			
52146	Ident. No.	400 •		

Prod. Gr. 5HG



ATORN L-shaped TX key set

for internal TX screws, with ball head



Execution:

■ Steel grey

■ TX ball head on the long wrench side


■ Chrome-vanadium steel Hardened

Delivery: In plastic clip

Tip size		TX9 TX10 TX15 TX20 TX25 TX27
TIP Size		TX30 TX40
Number of pieces in assortment/set		8
52146	ldent. No.	500
52 140	ident. No.	•







for internal TX screws, with ball head



Execution:

■ Chrome-vanadium steel

Hardened



Tip size		TX9	TX10	TX15	TX20	TX25	TX27	TX30	TX40
Limb length x lin	nb length 2	67 x 19 mm	76 x 20 mm	86 x 20 mm	98 x 22 mm	100 x 22 mm	111 x 25 mm	125 x 30 mm	139 x 33 mm
52146	ldent. No.	509 •	510 •	515 •	520 •	525 •	527 ●	530 •	540 ●

Prod. Gr. 5HG

ATORN TX screwdriver





- Blackened tir
- 3-component power grip, with large soft area
- No. 52144:
- Chrome-vanadium/molybdenum steel
- Continuously hardened
- No. 52145:
- chrome-vanadium/molybdenum steel
- fully hardened

- Better accuracy of fit with longer service life
- No. 52144: 3-component power grip with large soft area for comfortable use and fatigue-free working
- No. 52145: 3-component power grip with large soft area for comfortable use and effortless work

Technical data:

■ Surface: Chrome plated



No. 52145 910-52145 920, 52145 927-52145 940

Tip size		TX6	TX7	TX8	TX9	TX10	TX 15	TX20	TX25	TX27	TX30	TX40
Blade lengtl	n (mm)	60	60	60	60	80	80	100	100	115	115	130
Length (mm	1)	146	146	146	157	170	180	207	207	234	234	249
52144	Ident. No.	906 •	907 •	908 •	909 •	-	-	-	-	-	-	-
52145	Ident. No.	-	-	-	-	910	915	920	925	927	930	940

Prod. Gr. 5HG

ATORN TX screwdriver set



- chrome-vanadium/molybdenum steel
- fully hardened
- Brushed chromium-plated
- Blackened tip
- 3-component power grip, with large soft area

3-component power grip with large soft area for comfortable use and effortless work

Technical data:

- Tip size: TX10 | TX15 | TX20 | TX25 | TX30
- Number of pieces in assortment/set: 5

52145	Ident. No.	900
52 145	ident. No.	•
Prod. Gr. 5HG		



Ident. No. 925-940

TX-IP screwdriver

for TX screws, with borehole in the drive tip



Execution:


- Chrome-vanadium/molybdenum steel
- Continuously hardened
- Blackened tip
- 3-component power grip, with large soft area


Advantage:

- 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life

Technical data:

■ Surface: Chrome plated





for TX screws, with borehole in the drive tip



Application:

For turning safety screws (centre pin in profile).

Execution:

- Chrome-vanadium/molybdenum steel
- Continuously hardened
- Matt chromium-plated
- Blackened tip
- 3-component power grip, with large soft area

Advantage:

- 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life

Technical data:

■ Surface: Chrome plated



Tip size		TX10 + P TX15 + P TX20 + P	TX6 TX7 TX8 TX9 TX10 + P	TX10 + P TX15 + P TX20 + P TX25 + P TX30 + P	TX8 TX9 TX10 + P TX15 + P TX20 + P TX25 + P TX30 + P	
Number of pieces in assortment/set		3	5	5	7	
52144	ldent. No.	900 •	901 •	902 •	904 •	

Prod. Gr. 5HG



TX-Plus screwdriver, straight, 3-C handle



- chrome-vanadium/molybdenum steel
- Fully hardened
- Blackened tip
- 3-component power grip, with large soft area

Advantage:

- 3-component power grip with large soft area for comfortable use and effortless work
- Better accuracy of fit with longer service life

Technical data:

Surface: Chrome plated

Blade length (mm) 60 60 60 60 100 100 100 100 100 115 125 Length (mm) 142 142 142 152 192 202 202 202 213 228 238 52145 Ident. No. 806 807 808 809 810 815 820 825 827 830 840	Tip size		TXP6	TXP7	TXP8	TXP9	TXP10	TXP15	TXP20	TXP25	TXP27	TXP30	TXP40
806 807 808 800 810 815 820 825 827 830 840	Blade length	(mm)	60	60	60	60	100	100	100	100	100	115	125
52145 Ident. No. 806 807 808 809 810 815 820 825 827 830 840	Length (mm)		142	142	142	152	192	202	202	202	213	228	238
	52145	ldent. No.	806 •	807 •	808 •	809 •	810 •	815 •	820 •	825 •	827 •	830 •	840 •

Prod. Gr. 5HG

TX screwdriver with T-handle

with 2-component handle



Execution:

- easy-grip soft coating for optimum power transmission
- hard core for lasting blade/handle connection even under the highest loads
- blade made of CrV and CrMV (special alloy)
- optimum performance data up to 100% above the DIN values
- matt chrome-plated blade with black tip

Technical data:

■ Surface: Chrome plated



Ident. No. 240

Tip size		TX8	TX9	TX10	TX15	TX20	TX25	TX27	TX30	TX40	TX45
Blade length	(mm)	100	100	100	100	100	100	100	100	100	140
52147	ldent. No.	208	209	210	215	220	225	227	230	240	245

ATORN TX screwdriver set, with T-handle

with 2-component handle



Execution:

- easy-grip soft coating for optimum power transmission
- hard core for lasting blade/handle connection even under the highest loads
- blade made of CrV and CrMV (special alloy)
- optimum performance data up to 100% above the DIN values
- matt chrome-plated blade with black tip
- Blade length: 100 mm

Technical data:

- Tip size: TX10 | TX15 | TX20 | TX25 | TX30 | TX40
- Surface: Chrome plated
- Number of pieces in assortment/set: 6



Prod. Gr. 5HG



Screwdriver with ergonomically shaped T-handle

for internal TX screws



Execution:

- Straight
- Ergonomic T-handle
- Blade made of chrome-vanadium steel
- Hardened
- Black tip
- Hanging eyelet

Advantage:

■ Ergonomically adjusted to your hand for fatiguefree working

Technical data:

■ Surface: Chrome plated



Tip size		TX8	TX9	TX10	TX 15	TX20	TX25	TX27	TX30	TX40	TX45	TX50
Blade length	(mm)	100	100	100	100	100	100	100	100	100	150	150
Length (mm)		125	125	125	125	132	132	132	132	132	189	189
52147	ldent. No.	108	109	110	115	120	125	127	130	140	145	150
02147	ident. ivo.	•				•	•					•

Prod. Gr. 5HG



Screwdriver

with flag handle, for TX screws




- Blade made from molybdenum-vanadium steel
- Continuously hardened

Advantage:

 Improved resistance to corrosion thanks to burnishing process

Technical data:

Surface: Burnished



Prod. Gr. 5HG



Screwdriver

with flag handle, for TX PLUS screws



Execution:

- Blade made from molybdenum-vanadium steel
- Continuously hardened

Advantage:

■ Improved resistance to corrosion thanks to burnishing process

 TX PLUS with reinforced profile cross-section for up to 25% higher transferable torques compared to standard TX

Technical data:

■ Surface: Burnished









ATORN ESD slotted screwdriver

with precision handle







- High-precision screwdriver with rotating cap
- 2-component handle technology with comfortable, non-slip soft coating
- Black tip for precise fit
- Handle head with roll-off protection
- Blade produced from special chrome-molybdenum-vanadium alloy with optimal performance specifications up to 100 % above DIN values

Width of cutting edge (mm)		1.5	2.0	2.5	3.0	
Thickness of cutting edge (mm)		0.23	0.40	0.40	0.50	
Blade length (mm)		60	60 60		60	
Length (mm)		160	160	160	160	
Material of handle		2-component plastic	2-component plastic	2-component plastic	2-component plastic	
52689	Ident. No.	016 •	021 •	026 •	031 •	

Prod. Gr. 5HG



ESD Phillips screwdriver

with precision handle







- High-precision screwdriver with rotating cap
- 2-component handle technology with comfortable, non-slip soft coating
- Black tip for precise fit
- Handle head with roll-off protection
- Blade produced from special chrome-molybdenum-vanadium alloy with optimal performance specifications up to 100 % above DIN values

Tip size		PH00	PH0
Blade length (mm)		60	60
Length (mm)		160	160
Material of handle		2-component plastic	2-component plastic
52689	ldent. No.	101 •	111 •

Prod. Gr. 5HG



ATORN ESD hexagonal socket screwdrivers

with precision handle



Execution:

- Precision screwdriver with rotary cap
- 2-component handle technology with comfortable, non-slip soft coating
- Blade produced from special chrome molybdenum vanadium alloy with optimal performance data up to 100% above DIN values
- Handle top with roll-off protection

Width across flats		1.5 mm	2 mm	2.5 mm	3 mm
Blade length (mm)		60	60	75	75
Length (mm)		162	162	177	177
52689	Ident. No.	215	220	225	230

Prod. Gr. 5HG

TORN Lifter for ESD components



Application:

For removing tightly seated components.

Execution:

- Blade made from chromium-vanadium steel
- fully hardened
- brushed chromium-plated

■ Impact-resistant plastic precision handle

Technical data:

- Fork width (outer): 3.6 mm
- Blade length: 55 mm
- Length: 150 mm

52689	Ident. No.	300 ●
-------	------------	----------



ATORN ESD slotted and Phillips screwdriver set

with precision handle





- High-precision screwdriver with rotating cap
- 2-component handle technology with comfortable, non-slip soft coating
- Black tip for precise fit
- Handle head with roll-off protection
- Blade produced from special chrome-molybdenum-vanadium alloy with optimal performance specifications up to 100 % above DIN values

Delivery:

In ESD plastic box

Technical data:

- Number of pieces in assortment/set: 6 PCS
- Tip size: PH00 | PH0 | Slot 1.5 mm | Slot 2 mm | Slot 2.5 mm | Slot 3 mm



52689	Ident. No.	501
32007	ident. No.	•

Prod. Gr. 5HG

ORION[®]

Watchmakers' precision screwdriver with slotted blade

with aluminium handle



- Handle made of corrosion-resistant aluminium with high strength
- Rotating hexagon head made of black plastic
- Quick screwing possible thanks to tapered handle shape, central knurling and rotating cap
- Blades made of molybdenum-vanadium steel, hardened and bronzed

Width of cutti	ng edge (mm)	1.0	1.2	1.4	1.5	1.8	2.0	2.3	2.5	3.0	3.5
Length (mm)		80	84	84	84	100	100	100	100	112	112
Shaft Ø (mm)		5	5	5	5	6	6	6	6	8	8
52705	ldent. No.	610	612	614	615	618	620	623	625	630	635
52/05	ident. No.	•	•	•	•	•	•	•	•	•	•

Prod. Gr. 5LA

Watchmakers' precision screwdriver with cross recess blade

with aluminium handle



Execution:

- Handle made of corrosion-resistant aluminium with high strength
- Rotating hexagon head made of black plastic
- Quick screwing possible thanks to tapered handle shape, central knurling and rotating cap
- Blades made of molybdenum-vanadium steel, hardened and bronzed

Tip size		PH0000	PH000	PH00	PH0	PH1
Length (mm)		84	100	100	112	112
Blade Ø (mm)		1.5	2.0	2.5	3.0	3.5
Shaft Ø (mm)		5	6	6	8	8
52707	Ident. No.	010	020	030	040	050

Prod. Gr. 5LA





IRION Watchmakers' precision screwdriver sets with different equipment

with aluminium handle



Execution:

- Handle made of corrosion-resistant aluminium with high strength
- Rotating hexagon head made of black plastic
- Quick screwing possible thanks to tapered handle shape, central knurling and rotating cap

■ Blades made of molybdenum-vanadium steel, hardened and bronzed

Technical data:

• Number of pieces in assortment/set: 6

	In w	ooden box	In PVC case	
Tip size	52708 Ident. No.		52708 Ident. No.	
Slot 1 mm Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm Slot 3.5 mm	100	•	110	•
PH000 PH0 Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm	120	•	-	-
PH000 PH00 Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm	130	•	-	-
PH0 PH1 Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm	-	-	140	•





Ref. no. 100, 120

ORION°

Watchmakers' magazine screwdriver

4 blades in shaft



Execution:

- Robust plastic body with rotating cap
- Replacement blades in shaft
- Clamping insert with knurled nut made of nickel-plated tool steel
- Blades made of molybdenum-vanadium steel, hardened and bronzed

Technical data:

- Tip size: Slot 1.5 mm | Slot 2 mm | Slot 2.5 mm | Slot 3 mm
- Shaft diameter: 10 mm



52710	Ident. No.	030
-------	------------	-----

Prod. Gr. 5LA

ORION°

Watchmakers' precision screwdriver sets cross recess

with aluminium handle



- Handle made of corrosion-resistant aluminium with high strength
- Rotating hexagon head made of black plastic
- Quick screwing possible thanks to tapered handle shape, central knurling and rotating cap
- Blades made of molybdenum-vanadium steel, hardened and bronzed

		In I	PVC case	In w	ooden box
Number of pieces in assortment/	Tip size	5270	9	52709	
set		Ident. No.		Ident.	No.
3	PH000 PH00 PH0	100	•	-	-
4	PH0000 PH000 PH00 PH0	-	-	110	•

Prod. Gr. 5LA



Ref. no. 110

DRION Watchmaker's screwdriver sets



Execution:

- Blades made from chrome-vanadium steel
- Metal handles with rotary cap
- Chrome-plated

 Ident. No. 020: With external and internal hexagons with a width of 1.5-5 mm

Delivery:

In plastic box



Ref. no. 010

Number of pieces in assortment/set		6	16	
Tip size		PH0 PH1 Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm	PH00 PH0 PH1 PZ1 Slot 1 mm Slot 1.5 mm Slot 2 mm Slot 2.5 mm Slot 3 mm Slot 3.5 mm	
52704	Ident. No.	010 •	020 •	

Prod. Gr. 5LA

Slotted screwdrivers with hexagonal blades (DIN 5264)



Evecution

- Chrome-vanadium/molybdenum steel blade
- Continuously hardened
- Matt chromium-plated
- Blackened tip
- Steel blue/black
- Ident. No. 036-046: Without hexagonal shoulder for wrenches

 Ident. No. 056–121: With hexagonal shoulder for wrenches

Advantage:

- 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life

Technical data:

■ Material of handle: 2-component plastic

D. 10. 5110								
32/31	ident. No.	•	•	•	•	•	•	•
52751	Ident. No.	036	046	056	066	081	101	121
Length (mm)		186	197	209	245	269	297	320
Blade length (mm)	75	90	100	125	150	175	200
Thickness of cutti	ng edge (mm)	0.6	0.8	1	1.2	1.2	1.6	2
Width of cutting e	dge (mm)	3.5	4.5	5.5	6.5	8.0	10.0	12.0





Screwdriver with hexagonal blade sets (DIN 5264)



Ident. No. 381: For tightening and loosening slotted and Phillips-head screws

Execution:

- Ident. No. 351-381:
- Chrome-vanadium/molybdenum steel blade
- Continuously hardened

- Matt chromium-plated
- Blackened tip
- Steel blue/black
- With hexagonal shoulder for wrenches (from a width of 5.5 mm)
- Ident. No. 390:
- Extensive set for all screwing tasks
- Multi-component handles for optimum power transmission
- Blades hardened

Advantage:

- Ident. No. 351-381:
 - 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life



Ident. No. 381

Ident. No. 390

Number of pieces in assortment/set		6	6	8	20
Tip size		Slot 3.5 mm Slot 4.5 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm Slot 10 mm	PH1 PH2 Slot 4.5 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm	PH1 PH2 PH3 PZ1 PZ2 Slot 5.5 mm Slot 6.5 mm Slot 8 mm	PH1 PH2 PZ1 PZ2 Slot 5.5 mm Slot 6.5 mm Slot 4 mm HEX 3 mm HEX 4 mm HEX 5 mm HEX 6 mm TX10 TX15 TX20 TX25 TX30 8 mm 10 mm 13 mm 1/4 inch
52751	Ident. No.	351 •	361 •	381 •	390 ●

Prod. Gr. 5HG



Phillips screwdriver with hexagonal blade (ISO 8764)

With PH and PZ drive



- Chrome-vanadium/molybdenum steel blade
- Continuously hardened
- Matt chromium-plated
- Blackened tip
- Steel blue/black
- With hexagonal shoulder for wrenches

Advantage:

- 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life

Technical data:

■ Material of handle: 2-component plastic

Tip size		PH1	PH2	PH3	PZ1	PZ2	PZ3
Blade length (mm)		80	100	150	80	100	150
Length (mm)		187	219	269	187	219	269
52751	Ident. No.	501	502	503	601	602	603
52/51	ident. No.	•	•	•	•	•	•

Prod. Gr. 5HG

Phillips screwdriver with hexagonal blade sets (ISO 8764)




Execution:

- Chrome-vanadium/molybdenum steel blade
- Continuously hardened
- Matt chromium-plated
- Blackened tip
- Steel blue/black

With hexagonal shoulder for wrenches

Advantage:

- 3-component power grip with large soft area for comfortable use and fatigue-free working
- Better accuracy of fit with longer service life











Slotted screwdriver with striking cap (DIN 5264)

Hexagonal blade





- One-piece chrome-vanadium-molybdenum steel
- Fully hardened, impact-resistant on the handle side
- Solid striking cap for use as a chisel
- Brushed chromium-plated blade, blackened tip

• With hexagonal shoulder for wrenches

Advantage:

 3-component power grip for comfortable use and effortless work

Technical data:

■ Material of handle: 2-component plastic



Ident. No. 065

Width of cutting edge	(mm)	4.5	5.5	7.0	9.0	10.0	12.0
Thickness of cutting 6	edge (mm)	0.8	1.0	1.2	1.2	1.6	2.0
Blade length (mm)		85	95	130	150	175	210
Length (mm)		183	197	232	263	288	323
52753 Ident. No.		045	055	065	080	100	120
52/55	ident. No.	•	•	•	•	•	•

Prod. Gr. 5HG

Screwdriver set with striking cap (DIN 5264)

Hexagonal blade



Execution:

- One-piece chrome-vanadium-molybdenum steel blade
- Fully hardened, impact-resistant on the handle
- Solid striking cap
- Brushed chromium-plated blade, blackened tip
- With hexagonal shoulder for wrenches

Advantage:

■ 3-component power grip for comfortable use and effortless work

Technical data:

■ Tip size: PH1 | PH2 | Slot 4.5 mm | Slot 5.5 mm | Slot 7 mm



52753	Ident. No.	200 •

Prod. Gr. 5HG



Phillips screwdriver with striking cap (ISO 8764)

Hexagonal blade



- One-piece chrome-vanadium-molybdenum steel blade
- Fully hardened, impact-resistant on the handle side
- Solid striking cap to loosen seized screws
- Brushed chromium-plated blade, blackened tip

• With hexagonal shoulder for wrenches

Advantage:

■ 3-component power grip for comfortable use and effortless work

Technical data:

■ Material of handle: 2-component plastic

Tip size		PH1	PH2	PH3
Blade length (mm)		75	105	150
Length (mm)		177	207	263
52753	ldent. No.	010	020	030
52/55	ident. No.	•	•	•

Prod. Gr. 5HG



Ident. No. 020



Slotted screwdrivers with circular blade (DIN 5264)





- Blade made of chrome-vanadium steel
- Continuously hardened



• 3-component power grip with large soft area for comfortable use and fatigue-free working

Technical data:

■ Material of handle: 2-component plastic



Ident. No. 350-365

Width of cu (mm)	itting edge	2.5	3.0	3.5	4.0	4.5	5.0	5.5	5.5	6.0	6.5	8.0	10.0
Thickness (mm)	of cutting edge	0.4	0.5	0.6	0.8	0.8	0.9	1	1	1.1	1.2	1.2	1.6
Blade lengt	th (mm)	75	80	100	100	100	100	125	200	150	150	175	200
Length (mn	n)	161	166	197	207	207	207	232	307	269	269	294	319
52752	Ident. No.	325	330	335	340	345	350	355	357	360	365	380	400

Prod. Gr. 5HG

ATORN Screwdriver with circular blade sets (DIN 5264)



Execution:

- Chrome-vanadium/molybdenum steel blade
- Continuously hardened
- 3-component power grip, with large soft area

Advantage:

 3-component power grip with large soft area for comfortable use and fatigue-free working

Technical data:

• Number of pieces in assortment/set: 6



Ident. No. 410



Ident. No. 411



Ident. No. 412

Tip size		Slot 3 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm Slot 10 mm	PH1 PH2 Slot 4 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm	PZ1 PZ2 Slot 4 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm	
52752	ldent. No.	410 •	411 ●	412 •	

Prod. Gr. 5HG

Phillips screwdrivers with circular blades

With PH and PZ drive



Execution:

- Blade made of chrome-vanadium steel
- Continuously hardened
- 3-component power grip, with large soft area

Advantage:

3-component power grip with large soft area for comfortable use and fatigue-free working

Technical data:

■ Material of handle: 2-component plastic



TORN Phillips screwdrivers with circular blade sets (DIN 5264)





- Blade made of chrome-vanadium steel
- Continuously hardened

Advantage:

■ 3-component power grip with large soft area for comfortable use and fatigue-free working

Tip size		PH1 PH2 PH3	PZ1 PZ2 PZ3
50750	Ident. No.	700	710
52/52	ident. No.	•	•

Prod. Gr. 5HG





Ident. No. 710



ATORN Slotted screwdriver with short handle

with circular blade



Application:

For screwdriving work in confined spaces

- Blade hardened and chrome-plated, black tip
- Ergonomically shaped two-component handle for optimum power transmission

 Suspension hole and roll-away protection integrated in the handle

Technical data:

- Blade length: 25 mm
- Length: 82 mm
- Material of handle: 2-component plastic



Ident. No. 040, 065

Width of cutting edge (r	mm)	4	5.5	6.5
Thickness of cutting ed	ge (mm)	0.8	1.0	1.2
52755	Ident. No.	040 •	055 ●	065 •

Prod. Gr. 5HG



ATORN Phillips PH screwdriver with short handle

with circular blade



Application:

For screwdriving work in confined spaces

- Blade hardened and chrome-plated, black tip
- Ergonomically shaped two-component handle for optimum power transmission

 Suspension hole and roll-away protection integrated in the handle

Technical data:

- Blade length: 25 mm
- Length: 82 mm
- Material of handle: 2-component plastic



Ident. No. 002

Tip size		PH1	PH2
52755	ldent. No.	001	002
32733	ident. No.	•	•

Prod. Gr. 5HG

ATORN Slotted screwdriver with wooden handle



- Blade made of chrome-vanadium steel
- Chrome-plated
- Wooden handle with leather cap
- Continuous blade with hexagonal shoulder

■ Blackened tip Technical data:

■ Material of handle: Wood



Width of cutting	edge (mm)	3.5	4.5	5.5	7	9	10	12	14
Thickness of cut	ting edge (mm)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.5
Blade length (mr	n)	75	90	100	125	150	175	200	250
Length (mm)		175	190	205	230	270	295	325	380
52730	ldent. No.	510 •	520 •	530 •	540 •	550 •	560 ●	570 ●	580 •



ATORN Slotted and Phillips screwdriver sets

with wooden handle



Execution:

- Blade made of chrome-vanadium steel
- Chrome-plated

- Wooden handle with leather cap
- Continuous blade with hexagonal shoulder
- Blackened tip

Number of pieces in assortmen	t/set	6	7
Tip size		PH1 PH2 Slot 4.5 mm Slot 5.5 mm Slot 7 mm Slot 9 mm	Slot 3.5 mm Slot 4.5 mm Slot 5.5 mm Slot 7 mm Slot 9 mm Slot 12 mm
52730	ldent. No.	800 ●	810 ●

Prod. Gr. 5HG



Ident. No. 800



Ident. No. 810



Phillips screwdriver with wooden handle (ISO 8764)

With PH drive



■ Blade made of chrome-vanadium steel

■ Chrome-plated

■ Wooden handle with leather cap

Continuous blade with hexagonal shoulder

O AIDRN PH-2 x 100 50521002

■ Blackened tip Technical data:

■ Material of handle: Wood

Tip size PH2 PH3 PH4 Blade length (mm) 100 150 200 180 205 270 330 Length (mm) 550 570 540 560 52782... Ident. No.

Prod. Gr. 5HG



Slotted screwdrivers

with circular blade



Execution:

- Two-component grip with large soft area
- Cross hole
- Advantage:
- Ergonomic, effortless work

- High degree of torque transmission
- Cross hole for hanging up or inserting a lever

Technical data:

■ Material of handle: 2-component plastic

Width of cuttin	g edge (mm)	2.5	3	3.5	4	5.5	6.5	8	10	12
Thickness of co	utting edge	0.4	0.5	0.6	0.8	1.0	1.2	1.2	1.6	2.0
Blade length (n	nm)	75	75	100	100	125	150	175	200	250
Length (mm)		135	155	175	185	220	255	290	315	355
52752	Ident. No.	025	030	035	040	055	065	080	100	120

Prod. Gr. 5LA



DRION® Slotted and Phillips screwdriver sets

with circular blade



Execution:

- Two-component grip with large soft area
- Cross hole

Advantage:

- Ergonomic, effortless work
- High degree of torque transmission
- Cross hole for hanging up or inserting a lever

Number of pieces in assortment/set		5	5	8
		PH1 PH2	Slot 3.5 mm Slot	Slot 2.5 mm Slot 3 mm
Tip size		Slot 4 mm	4 mm Slot 5.5 mm	
		Slot 5.5 mm	Slot 6.5 mm Slot	Slot 5.5 mm Slot 6.5 mm
		Slot 6.5 mm	8 mm	Slot 8 mm Slot 10 mm
52752	Ident. No.	200	230	250
52/52	ident. No.	•	•	•



Prod. Gr. 5LA

ORION°

Phillips screwdrivers (ISO 8764)

With PH and PZ drive





- Two-component grip with large soft area
- Cross hole

Advantage:

■ Ergonomic, effortless work

- High degree of torque transmission
- Cross hole for hanging up or inserting a lever

Technical data:

■ Material of handle: 2-component plastic



Ref. no. 005-030



Ref. no. 105-130

Tip size		PH0	PH1	PH2	PH3	PZ0	PZ1	PZ2	PZ3
Blade lengt	th (mm)	60	80	100	150	60	80	100	150
Length (mn	n)	135	175	205	265	135	175	205	265
52788	Ident. No.	005	010	020	030	105	110	120	130
32/00	idelit. No.	•	•	•	•	•	•	•	•

Prod. Gr. 5LA



ATORN Voltage tester screwdriver

for 150-250 V



Application:

Testing equipment for determining alternating voltages according to VDE 0680

Execution:

■ Plastic-coated blade made from chrome-vanadium steel

• Ergonomically shaped, transparent handle with light tubes

Advantage:

- Ergonomic handle for comfortable handling
- With practical clip

Width of cutting edge (mm)	3		
Thickness of cutting edge (mm)	0.8		
Blade length (mm)	70		
Length (mm)	143		
Material of handle	1-component plastic		
52721	ldent. No.	100	
J2/21	ident. No.		

Prod. Gr. 5HG



Voltage tester screwdriver

Single-pole phase tester for 120-250 V



Application:

Test equipment for determining alternating voltages according to DIN VDE 0680-6

Execution:

- Insulated blade made from vanadium special steel
- Handle made from transparent plastic
- Light tubes (cannot be replaced)
- Clip



- Width of cutting edge: 3 mm
- Thickness of cutting edge: 0.8 mm
- Blade length: 61 mm
- Length: 145 mm
- Material of handle: 1-component plastic





Prod. Gr. 5LA

IRION Voltage tester with cable and clamp

Application:

Equipment for determining voltages

Execution:

- Robust brass housing
- With 870-mm connection cable and crocodile clip
- Unscrewable tester tip, with needle tip
- Light tubes (cannot be replaced)
- 6 to 24 V voltage measuring range

Advantage:

 Insulated cables can also be tested using the needle tip

Length (mm)	150	
Material of handle	Brass	
52723	ldent. No.	010 •

Prod. Gr. 579



DRION® PLUS multi-stripper

Execution:

- Screwdriver with two reversible bits
- Phase and voltage tester (110-250 V)
- Cable stripper for 8-13 mm circular cables and coax cables
- Cable cutters up to 9 mm
- Two-component handle

Advantage:

- Flexible applications in a single tool
- Ergonomic handle for comfortable handling

Length (mm)	199	
52724	Ident. No.	010

Prod. Gr. 5LA



ATORN VDE slotted screwdrivers (DIN 7437)



Application:

For working on live components

Execution:

- Protective insulation (to DIN EN 60900) sprayed directly onto the blade
- Slim design: Insulating layer in the front part flush with the output
- multi-component handle provides optimum power transmission
- Screw symbols on the handle cap
- Roll-off protection integrated in the handle

Technical data:

■ Material of handle: 2-component plastic

Width of cutting ed	lge (mm)	3.5	4.0	5.5	6.5
Thickness of cuttin	ig edge (mm)	0.6	0.8	1.0	1.2
Blade length (mm)		100	100	125	125
Length (mm)		197	207	244	269
52725	Ident. No.	335	340	355	365
		•	•	•	•

Prod. Gr. 5HG



Ident. No. 355

VDE Phillips screwdrivers (DIN 7438)

with slim blade/PH, PZ and PZS




For working on live components

Execution:

- Protective insulation (to DIN EN 60900) sprayed directly onto the blade
- Slim design: Insulating layer in the front part flush with the output
- multi-component handle provides optimum power transmission
- Screw symbols on the handle cap
- Roll-off protection integrated in the handle

Technical data:

■ Material of handle: 2-component plastic





Ident. No. 421

Ident. No. 520



ATORN VDE screwdriver, TORX

with slim blade





for working on live components


Execution:

- protective insulation as per DIN EN 60900 sprayed directly onto the blade
- slim design: insulating layer in the front part is flush with the output
- multi-component handle provides optimum power transmission
- screw symbols on the grip cap
- roll-away protection integrated in the handle

Technical data:

Tip size		TX15	TX20	TX25
Blade length (mm)		100	125	125
Length (mm)		207	244	244
52725	Ident. No.	515	520	525
52/25	ident. No.	•	•	•

Prod. Gr. 5HG



VDE screwdriver set (DIN 7437)

with slim blade



Execution:

- 3-component Power Grip handle for optimum power transmission
- soft quick-turning zone with hard power point
- completely hardened and tempered blade with optimum elasticity and wear resistance

■ VDE insulated to 1000 V in line with EN 60900 (fully insulated blade)

Advantage:

 equally suited to small and large hands, right and left handers.

Number of pieces in assortmen	t/set	6	6	
Tip size		PH1 PH2 Slot 3.5 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm	PZ1 PZ2 Slot 3.5 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm	
52725 Ident. No.		Ident. No.		

Prod Gr 5HG



Ident. No. 600

ATORN VDE slotted screwdrivers (DIN 7437)



Application:

For working on live components.

Execution:

- Protective insulation according to DIN EN 60900
- Chrome-vanadium/molybdenum steel blade
- Hardened and burnished
- Blade insulation sprayed directly onto the blade
- 3-component power grip, red/yellow

■ Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- High degree of torque transmission

■ Material of handle: 2-component plastic



Ident. No. 066



VDE slotted and Phillips screwdriver sets (DIN 7437)






For working on live components.

Execution:

- Protective insulation according to **DIN EN 60900**
- Chrome-vanadium/molybdenum steel blade
- Hardened and burnished
- Blade insulation sprayed directly onto
 High degree of torque transmission the blade
- 3-component power grip, red/yellow
- Individually tested
- Ident. No. 201–202: Ref. no. 202 - with voltage tester screwdriver, slotted 3 mm

Advantage:

- Ergonomic handle for comfortable handling



Ident. No. 201

Number of pieces in assortment/set		6	7	5
Tip size		PH1 PH2 Slot 2.5 mm Slot 3.5 mm Slot 4 mm Slot 5.5 mm	PH1 PH2 Slot 2.5 mm Slot 3 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm	Slot 2.5 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm Slot 8 mm
52726	ldent. No.	201 •	202 •	203

Prod. Gr. 5HG

ATORN VDE Phillips screwdrivers (DIN 7438)

For PH and PZ



Application:

For working on live components.

- Protective insulation according to DIN EN 60900
- Chrome-vanadium/molybdenum steel blade
- Hardened and burnished
- Blade insulation sprayed directly onto the blade
- 3-component power grip, red/yellow

Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- High degree of torque transmission



■ Material of handle: 2-component plastic



Ident. No. 302

Tip size		PH0	PH1	PH2	PH3	PZ0	PZ1	PZ2	PZ3
Blade length (mr	m)	60	80	100	150	60	80	100	150
Length (mm)		146	187	219	269	146	187	219	269
52786	Ident. No.	300	301	302	303	400	401	402	403
32700	ident. No.	•	•	•	•	•	•	•	•

Prod. Gr. 5HG

ATORN VDE Phillips screwdriver set (DIN 7438)



Application:

For working on live components.

- Protective insulation according to DIN EN 60900
- Chrome-vanadium/molybdenum steel blade
- Hardened and burnished
- Blade insulation sprayed directly onto the blade
- 3-component power grip, red/yellow

■ Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- High degree of torque transmission

Technical data:

• Number of pieces in assortment/set: 3 PCS



Ident. No. 410

Tip size		PH1 PH2 PH3	PZ1 PZ2 PZ3
52786	ldent. No.	310 •	410 •

ORION® VDE slotted screwdrivers



Application:

For working on live components.

Execution:

- Protective insulation according to DIN EN 60900
- High-alloy special steel blade
- Hardened and burnished
- Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- Better resistance to corrosion
- Handle and insulation in impact-resistant plastic

Technical data:

■ Material of handle: 1-component plastic

Width of cutting	edge (mm)	2.5	3	3.5	4	5.5	6.5	8	10
Thickness of cut	ting edge (mm)	0.4	0.5	0.6	0.8	1	1.2	1.2	1.6
Blade length (mn	n)	75	100	100	100	125	150	175	200
Length (mm)		155	180	180	190	225	250	285	310
52728	Ident. No.	530	540	550	560	580	590	600	610
32/20	idelit. NO.	•	•	•	•	•	•	•	•

Prod. Gr. 5LA

PRION® **VDE slotted screwdriver set** (DIN 7437)



Application:

For working on live components.

Execution

- Protective insulation according to DIN EN 60900
- High-alloy special steel blade
- Hardened and burnished
- Certified 'GS' safety

■ Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- Handle and insulation in impact-resistant plastic

Delivery

In cardboard packaging



Number of pieces in assortment/set		7	
Tip size		PH1 PH2 Slot 2.5 mm Slot 3 mm Slot 4 mm Slot 5.5 mm Slot 6.5 mm	
52728	ldent. No.	800 ●	

Prod. Gr. 5LA

DRION VDE Phillips PH screwdriver (DIN 7438)



Application:

For working on live components.

Execution

- Protective insulation according to DIN EN 60900
- High-alloy special steel blade
- Hardened and burnished
- Individually tested

Advantage:

- Ergonomic handle for comfortable handling
- Handle and insulation in impact-resistant plastic

Technical data:

■ Material of handle: 1-component plastic



Prod. Gr. 5LA

ATORN Bit assortment in box, 10 pcs



- Equipped with 9 bits C 6.3, 1/4", 25 mm in length
- Magnetic holder with 1/4" magnetic mount and precise concentricity
- Ident. No. 500-520: High-quality wear-resistant bits with precise manufacturing dimensions
- Ident. No. 530:
- High-quality bits with torsion zone for cushioning of load peaks

 Torsion zone avoids bit breakage on tough screw fittings

Delivery:

Plastic box

Technical data:

- Blade length: 25 mm
- Drive: 1/4 inch



Ident. No. 500



Ident. No. 530

PH1 | PH2 | PH3 | PZ1 | PZ2 | TX10 | TX15 | PH1 | PH2 | PZ1 TX20 | TX25 | TX27 | TX30 | | PZ2 | TX10 | TX15 | TX20 | PZ3 | Slot 4.5 Tip size Slot 5.5 mm | Slot 6.5 TX40 TX25 | TX30 mm Slotted, PH, PZ 500 52987.. Ident. No. equipment 510 52987.. TX equipment Ident. No. PH. PZ. TX 520 52987... Ident. No. equipment 530 52987... Torsion bits Ident. No. _

Prod. Gr. 5HE

ATORN Bit assortment in box, 31 pcs



Execution:

- Equipped with 30 bits C 6.3, 1/4", 25 mm in length
- Magnetic holder with 1/4" magnetic mount and precise concentricity
- High-quality wear-resistant bits with precise manufacturing dimensions
- ABS/polycarbonate bit box is rugged and impact-resistant
- Ident. No. 600: All-round set, slotted/cross recess/TX/hexagon socket
- Ident. No. 610:
- TORSION set
- High-quality bits with torsion zone
- Torsion zone avoids bit breakage on tough screw fittings
- Ident. No. 620: Sorted TX set (the most common sizes are included several times)

■ Ident. No. 630: All-round set, cross recess/TX/ TX with hole,

Delivery:

Plastic box

Technical data:

- Blade length: 25 mm
- Drive: 1/4 inch



Ident. No. 600



Ident. No. 610



Ident. No. 620



Ident. No. 630

Tip size			PH1 PH2 PZ1 PZ2 TX10 TX15 TX20 TX25 TX30 2.5 mm 3 mm 4 mm 5 mm 6 mm Slot 4.5 mm Slot 5.5 mm Slot 6.5 mm	TX10 TX15 TX20 TX25 TX30 TX40	TX10 TX15 TX20 TX25 TX30 TX40 PH1 PH2 PH3 PZ1 PZ2 PZ3 TX10 + P TX15 + P TX20 + P TX25 + P TX30 + P TX40 + P
52987	Set ALLROUND	ldent. No.	600 •	-	-
52987	TORSION set	ldent. No.	610 •	-	-
52987	Set TX	Ident. No.	-	620 •	-
52987	Set TX/TX-P/PH/PZ	ldent. No.	-	-	630 •

ATORN Bit assortment in box 61 pcs or 32 pcs with bit handle















Application:

Ident. No. 700: For mechanical screwing of slotted, Phillips-head, TX, TX-IP and hexagon-socket screws

Execution:

- Magnetic holder with 1/4" magnetic mount and precise concentricity
- High-quality wear-resistant bits with precise manufacturing dimensions
- ABS/polycarbonate bit box is rugged and impact-resistant
- Ident. No. 700:
 - Equipped with 60 bits C 6.3, 1/4", 25 mm in length

- All-round set, slotted/cross recess/hexagon socket/TX/TX with hole.
- Ident. No. 710:
- Equipped with 30 bits C 6.3, 1/4", 25 mm in length
- All-round set, slotted/cross recess/hexagon socket/TX and screwdriver handle

Delivery:

Plastic box

Technical data:

- Blade length: 25 mm
- Drive: 1/4 inch







Ident. No. 710

Tip size		TX10 TX15 TX20 TX25 TX30 TX40 PH1 PH2 PH3 PZ1 PZ2 PZ3 TX10 + P TX15 + P TX20 + P TX25 + P TX30 + P TX40 + P 2.5 mm 3 mm 4 mm 5 mm 6 mm Slot 4.5 mm Slot 5.5 mm Slot 6.5 mm	TX10 TX15 TX20 TX25 TX30 TX40 PH PH2 PH3 PZ1 PZ2 PZ3 3 mm 4 mm 5 mm 6 mm Slot 4.5 mm Slot 5.5 mm Slot 6.5 mm	
52987	Ident. No.	700	710	
32707	ident. No.	•	•	
Drod Cr 5UE				

Prod. Gr. 5HE

ATORN Hex bit socket set 6 pcs and connector set 3 pcs





Application:

Ident. No. 900: For socket wrench inserts 1/4", 3/8". 1/2

Execution:

- Ident. No. 800:
- With direct drive E 6.3, 1/4" and magnet mount
- High-strength hardened inserts for machine operation
- Magnet securely holds screw or nut
- Set of 6 including the most common widths.
- Ident. No. 900:
- Hex drive E 6.3, 1/4", square output
- With ball lock (spring-loaded ball on a square)

Delivery:

In plastic box

Technical data:

■ Blade length: 50 mm

13 12 10 38 6 7
Ident. No. 800



Tip size		7 mm 8 mm 3/8 inch 10 mm 12 mm 13 mm	1/4 inch 3/8 inch 1/2 inch
Drive		E 6.3 (1/4 inch)	1/4 inch
52987	Ident. No.	800	900 •

Prod. Gr. 5HE

ATORN Hexagon-head bit with 1/4-inch hexagonal drive



Execution:

Prod. Gr. 5HE

- Drive in accordance with DIN 3126, type E 6.3
- Drive side with magnetic mount for holding screws
- Hardened and bronzed

Technical data:

- Blade length: 50 mm ■ Surface: Uncoated
- Drive: E 6.3 (1/4 inch)
- Width across flats 7 mm 8 mm 10 mm 12 mm 13 mm 3/8 inch 803 804 806 808 809 820 52987... Ident. No.





Ident. No. 803



Ident. No. 820

ATORN Adapter/tool shank with 1/4-inch hexagonal drive





Application:


For attaching socket wrench inserts

Execution:

- Drive 1/4 inch C or E 6.3 hexagonal
- Square output with ball lock (spring-loaded ball) for nut clamping

Technical data:

- Tip type: Square-cut
- Drive: 1/4 inch
- Drive type: Hexagon



Ident. No. 904

Length (mm) 25 50 50 50 1/4 inch 1/4 inch 3/8 inch 1/2 inch Tip size 902 901 903 904 52987... Ident. No. • • •

Prod. Gr. 5HE

ATORN Bit holder with 1/4-inch hexagonal drive



Execution:

- Ident. No. 010-020:
- Bit mount, 1/4 inch, E 6.3 with magnet
- High concentricity
- Fast bit change
- Ident. No. 030-040:
- Quick-change chuck with bit mount, 1/4 inch, E 6.3 with magnet
- Holder with high concentricity
- Fast bit change and secure bit locking

Technical data:

- Bit holder: 1/4 inch hexagon
- Tip size: 1/4 inch
- Tip type: Hexagon socket
- Drive: E 6.3 (1/4 inch)

Ident. No. 010
Ident. No. 020
Ident. No. 030
Ident. No. 040

Length (mm)			50	74	60	75
52988	Universal holder with magnet	ldent. No.	010 •	020 •	-	-
52988	Quick-change bit holder	ldent. No.	-	-	030	040 •

Prod. Gr. 5HE

ATORN Handheld bit holder with 1/4-inch hexagonal mount



Execution:

- Ident. No. 100:
- Ergonomically shaped 2-component handle with comfortable soft zone and optimum power transmission properties.
- Quick-change chuck, 1/4 inch, E 6.3 with secure bit locking
- Slim and handy design
- Ident. No. 110:

- Ergonomically shaped two-component handle with optimum power transmission properties
- Precision quick-change chuck with bit lock

Technical data:

- Bit holder: 1/4 inch hexagon
- Blade length: 40 mm
- Tip size: 1/4 inch
- Tip type: Hexagon socket

Length (mm)		139	-
Handle length (mm)		-	50
Material of handle		-	2-component plastic
52988	ldent. No.	100 •	110 •

Prod. Gr. 5HE



Ident. No. 110



ATORN Slotted bit 1/4 inch drive

Length: 25 mm



Execution:

- 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened



- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Width of cutting edge (m	m)	4.5	5.5	5.5	6.5	8.0
Thickness of cutting edge	e (mm)	0.6	0.8	1.0	1.2	1.6
52983	Ident. No.	100 •	110 •	120 •	130 •	140 •

Prod. Gr. 5HE



ATORN Slotted bit 1/4 inch drive

Length: 70 mm



Execution:

- 1/4 inch external hexagon drive **type E** 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- Fully hardened

Advantage:

■ Deeper-set screws are easier to reach

Technical data:

■ Blade length: 70 mm ■ Surface: Uncoated ■ Drive: E 6.3 (1/4 inch)

Width of cutting edge (mm)		3.0	3.5	4.0	5.5	6.5
Thickness of cutting edge (n	nm)	0.5	0.6	0.8	1.0	1.2
52984	ldent. No.	400	410	420	430	440

Prod. Gr. 5HE



ATORN Slotted bit 5/16 inch drive



- 5/16"-external hexagon drive, type C 8 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 41 mm
- Surface: Uncoated
- Drive: C 8.0 (5/16 inch)



Width of cutting edge	(mm)	5.5	5.5	6.5	10.0	12.0	14.0
Thickness of cutting	edge (mm)	0.8	1.0	1.2	1.6	2.0	2.5
52987 Ident.	Ident. No.	200	210	220	230	240	250
32907	ident. No.	•	•	•	•	•	•

Prod. Gr. 5HE

Cross recess ACR - PH and PZ bits

Drive 1/4 inch



Application:

Suitable for screw connections that are difficult to loosen

Execution:

- 1/4" hexagon head drive, type C 6.3 according to DIN 3126/ISO 1173
- "Ribbed" ACR bits significantly reduce the cam-out effect and are particularly suitable for loosening corroded or painted screws due to their oustanding grip.
- fully hardened
- Chromium-vanadium steel
- Fully hardened

Technical data:

- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Ident. No. 923-925

Tip size		PH1 ACR	PH2 ACR	PH3 ACR	PZ1 ACR	PZ2 ACR	PZ3 ACR
Tip type		PH	PH	PH	PZ	PZ	PZ
52983	Ident. No.	920	921	922	923	924	925
32703	ident. No.	•	•	•	•	•	•



TORSION - cross recess Phillips (PH) and Pozidriv (PZ) bits

Drive 1/4 inch



Application:

For particularly tough conditions - torsion zone absorbs load peaks

Execution:

- 1/4" hexagon head drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- Fully hardened

- Tough material properties
- Torsion zone prevents the bit from tearing off
- Cushions load peaks

Technical data:

- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Ident. No. 001-003



Ident. No. 011-013

Tip size		PH1	PH2	PH3	PZ1	PZ2	PZ3
52983	Ident. No.	001	002 •	003	011 •	012 •	013 •

Prod. Gr. 5HE

TORN

Cross recess Phillips (PH) and Pozidriv (PZ) bits, 1/4 inch drive

Length 25 and 50 mm



- Chromium-vanadium steel
- fully hardened
- No. 52983: 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173

■ No. 52984: 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173

Technical data:

Surface: Uncoated




No. 52983 200-52983 203



No. 52984 001-52984 003



No. 52983 300-52983 303



No. 52984 011-52984 013

Tip size	Blade length (mm)	Drive	52983 Ident. No		52984 Ident.	
PH0	25	C 6.3 (1/4 inch)	200	•	-	-
PH1	25	C 6.3 (1/4 inch)	201	•	-	-
PH2	25	C 6.3 (1/4 inch)	202	•	-	-
PH3	25	C 6.3 (1/4 inch)	203	•	-	-
PZ0	25	C 6.3 (1/4 inch)	300	•	-	-
PZ1	25	C 6.3 (1/4 inch)	301	•	-	-
PZ2	25	C 6.3 (1/4 inch)	302	•	-	-
PZ3	25	C 6.3 (1/4 inch)	303	•	-	-
PH1	50	E 6.3 (1/4 inch)	-	-	001	•
PH2	50	E 6.3 (1/4 inch)	-	-	002	•
PH3	50	E 6.3 (1/4 inch)	-	-	003	•
PZ1	50	E 6.3 (1/4 inch)	-	-	011	•
PZ2	50	E 6.3 (1/4 inch)	-	-	012	•
PZ3	50	E 6.3 (1/4 inch)	-	-	013	•

Prod. Gr. 5HE

Cross recess Phillips (PH) and Pozidriv (PZ) bits, 1/4 inch drive

Technical data:

■ Surface: Uncoated

■ Drive: E 6.3 (1/4 inch)

Length 70, 90 and 152 mm



Execution:

- 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Tip size	Blade length (mm)	52986	5298	52987	
· ·		Ident. No.	ldent.	No.	
PH1	70	001	-	-	
PH2	70	002	-	-	
PH3	70	003	-	-	
PZ1	70	011	-	-	
PZ2	70	012	-	-	
PZ3	70	013	-	-	
PH1	90		001	•	
PH2	90		002	•	
PH3	90		003	•	
PZ1	90		011	•	
PZ2	90		012	•	
PZ3	90		013	•	
PH1	152		101	•	
PH2	152		102	•	
PH3	152		103	•	
PZ1	152		111	•	
PZ2	152		112	•	
P73	152		113	•	

No. 52986 001-52986 003 No. 52987 001-52987 003 No. 52987 101-52987 103 No. 52986 011-52986 013 No. 52987 011-52987 013 No. 52987 111-52987 113



Cross recess Phillips (PH) and Pozidriv (PZ) bits, 5/16 inch drive

Length: 32 mm



Execution:

- 5/16"-external hexagon drive, type C 8 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 32 mm
- Surface: Uncoated
- Drive: C 8.0 (5/16 inch)



Ident. No. 301-303



Ident. No. 311-314

Tip size		PH1	PH2	PH3	PZ1	PZ2	PZ3	PZ4
E2007	Ident. No.	301	302	303	311	312	313	314
52987	ident. No.	•	•	•	•	•	•	•

Prod. Gr. 5HE



TORSION - TX bits

Drive 1/4 inch



Application:

For particularly tough conditions — torsion zone absorbs load peaks

Execution:

- 1/4" hexagon head drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- Fully hardened

- Tough material properties
- Torsion zone prevents the bit from tearing off
- Cushions load peaks

Technical data:

- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Tip size		TX10	TX15	TX20	TX25	TX27	TX30	TX40
52983	ldent. No.	010	015	020	025	027	030	040

Prod. Gr. 5HE



TX bits, 1/4 inch drive

In lengths 25 and 50 mm



Execution:

- Chromium-vanadium steel
- fully hardened
- No. 52983: 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173

■ No. 52984: 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173

Technical data:

■ Surface: Uncoated




No. 52983



No. 52984

Tip size	Blade length (mm)	Drive	52983 Ident. No		
TX3	25	C 6.3 (1/4 inch)	403	• -	-
TX4	25	C 6.3 (1/4 inch)	404	• -	-
TX5	25	C 6.3 (1/4 inch)	405	• -	-
TX6	25	C 6.3 (1/4 inch)	406	• -	-
TX7	25	C 6.3 (1/4 inch)	407	• -	-
TX8	25	C 6.3 (1/4 inch)	408	• -	-
TX9	25	C 6.3 (1/4 inch)	409	• -	-
TX10	25	C 6.3 (1/4 inch)	410	• -	-
TX15	25	C 6.3 (1/4 inch)	415	• -	-
TX20	25	C 6.3 (1/4 inch)	420	• -	-
TX25	25	C 6.3 (1/4 inch)	425	• -	-
TX27	25	C 6.3 (1/4 inch)	427	• -	-
TX30	25	C 6.3 (1/4 inch)	430	• -	-
TX40	25	C 6.3 (1/4 inch)	440	• -	-
TX8	50	E 6.3 (1/4 inch)	-	- 008	•
TX10	50	E 6.3 (1/4 inch)	-	- 010	•
TX15	50	E 6.3 (1/4 inch)	-	- 015	•
TX20	50	E 6.3 (1/4 inch)	-	- 020	•
TX25	50	E 6.3 (1/4 inch)	-	- 025	•
TX27	50	E 6.3 (1/4 inch)	-	- 027	•
TX30	50	E 6.3 (1/4 inch)	-	- 030	•
TX40	50	E 6.3 (1/4 inch)	-	- 040	•



In lengths 70, 90 and 152 mm



Execution:

- 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Surface: Uncoated
- Drive: E 6.3 (1/4 inch)



No. 52987 108-52987 140

52987...

Tip size	Blade length (mm)	52986	52987
	, ,	Ident. No.	Ident, No.
T) (0	=-		ident. Ivo.
TX8	70	008	
TX10	70	010	
TX15	70	015	
TX20	70	020	
TX25	70	025	
TX27	70	027	
TX30	70	030	
TX40	70	040	
TX8	90		008
TX10	90		010
TX15	90		015
TX20	90		020

		Ident.	No.	Ident.	No.
TX25	90	-	-	025	
TX27	90	-	-	027	
TX30	90	-	-	030	
TX40	90	-	-	040	
TX8	152	-	-	108	
TX10	152	-	-	110	
TX15	152	-	-	115	
TX20	152	-	-	120	
TX25	152	-	-	125	
TX27	152	-	-	127	
TX30	152	-	-	130	
TX40	152	-	-	140	
	· · · · · · · · · · · · · · · · · · ·				

Blade length (mm) 52986...

Prod. Gr. 5HE

ATORN

TX bits 5/16 inch drive

In length 35 mm



- 5/16"-external hexagon drive, type C 8 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 35 mm
- Surface: Uncoated
- Drive: C 8.0 (5/16 inch)



Tip size		TX20	TX25	TX27	TX30	TX40	TX45	TX50	TX55	TX60
52987	ldent. No.	320	325	327	330	340	345	350	355	360

Tip size

Prod. Gr. 5HE

TX bits with borehole in drive tip, 1/4 inch drive

In lengths 25 and 50 mm



Execution:

- Chromium-vanadium steel
- fully hardened
- No. 52983: 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173

■ No. 52984: 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173

Technical data:

■ Surface: Uncoated



No. 52984

Tip size	Blade length (mm)	Drive	5298 Ident.		5298 Ident.	
TX10	25	C 6.3 (1/4 inch)	510	•	-	-
TX15	25	C 6.3 (1/4 inch)	515	•	-	-
TX20	25	C 6.3 (1/4 inch)	520	•	-	-
TX25	25	C 6.3 (1/4 inch)	525	•	-	-
TX27	25	C 6.3 (1/4 inch)	527	•	-	-
TX30	25	C 6.3 (1/4 inch)	530	•	-	-
TX40	25	C 6.3 (1/4 inch)	540	•	-	-
TX7	50	E 6.3 (1/4 inch)	-	-	107	•
TX8	50	E 6.3 (1/4 inch)	-	-	108	•
TX9	50	E 6.3 (1/4 inch)	-	-	109	•
TX10	50	E 6.3 (1/4 inch)	-	-	110	•
TX15	50	E 6.3 (1/4 inch)	-	-	115	•
TX20	50	E 6.3 (1/4 inch)	-	-	120	•



ATORN TX Plus bits 1/4 inch drive

In length 25 mm



Execution:

- 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel

Tip size

TXP6

TXP7


TXP8

TXP9

■ fully hardened



- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Tip size	52983 Ident. No.		
TXP27	627	•	
TXP30	630	•	
TXP40	640	•	

Prod. Gr. 5HE



ATORN Hexagon bit, 1/4 inch drive

52983.

606

607

608

609

Ident. No.

for hexagon socket screws, lengths 25 and 50 mm



Execution:

- Chromium-vanadium steel
- fully hardened
- No. 52983: 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173

■ No. 52984: 1/4"-external hexagon drive, type E 6.3 according to DIN 3126/ISO 1173

Technical data:

■ Surface: Uncoated



No. 52984

Width across flats	Blade length (mm)	Drive	52983	529	52984	
			Ident. No.	Iden	t. No.	
1.5 mm	25	C 6.3 (1/4 inch)	715	• -	-	
2 mm	25	C 6.3 (1/4 inch)	720	• -	-	
2.5 mm	25	C 6.3 (1/4 inch)	725	• -	-	
3 mm	25	C 6.3 (1/4 inch)	730	• -	-	
4 mm	25	C 6.3 (1/4 inch)	740	• -	-	
5 mm	25	C 6.3 (1/4 inch)	750	• -	-	
6 mm	25	C 6.3 (1/4 inch)	760	• -	-	
7 mm	25	C 6.3 (1/4 inch)	770	• -	-	
8 mm	25	C 6.3 (1/4 inch)	780	• -	-	
10 mm	25	C 6.3 (1/4 inch)	790	• -	-	
2.5 mm	50	E 6.3 (1/4 inch)	-	- 225	•	
3 mm	50	E 6.3 (1/4 inch)	-	- 230	•	
4 mm	50	E 6.3 (1/4 inch)	-	- 240	•	
5 mm	50	E 6.3 (1/4 inch)	-	- 250	•	
6 mm	50	E 6.3 (1/4 inch)	-	- 260	•	
8 mm	50	E 6.3 (1/4 inch)	-	- 280	•	
10 mm	50	E 6.3 (1/4 inch)	-	- 290	•	

Prod. Gr. 5HE



Hexagon bit, 5/16 inch drive

for hexagon socket screws



- 5/16"-external hexagon drive, type C 8 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 30 mm
- Surface: Uncoated
- Drive: C 8.0 (5/16 inch)

Width across flats		3 mm	4 mm	5 mm	6 mm	8 mm	10 mm
52987 Id	Ident. No.	403	404	405	406	408	410
3290/	ident. No.	•	•	•	•	•	•





ATORN Hexagon bit with ball head, 1/4 inch drive

for hexagon socket screws



Execution:

- 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)

Width across fl	ats	2.5 mm	3 mm	4 mm	5 mm	6 mm
52983	Ident. No.	825 •	830 •	840 •	850 •	860 •

Prod. Gr. 5HE



Triple square bit, 1/4 inch drive, in lengths 25 and 50 mm

for XZN socket screws



- Chromium-vanadium steel
- fully hardened
- No. 52983: 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173

■ No. 52984: 1/4"-external hexagon drive type E 6.3 according to DIN 3126/ISO 1173

Technical data:

- Tip type: Multi tooth
- Surface: Uncoated



No. 52983



No. 52984

Tip size	Blade length (mm)	Drive	5298 3 Ident.		5298 Ident.	
XZN M4	25	C 6.3 (1/4 inch)	910	•	-	-
XZN M5	25	C 6.3 (1/4 inch)	911	•	-	
XZN M6	25	C 6.3 (1/4 inch)	912	•	-	-
XZN M8	25	C 6.3 (1/4 inch)	913	•	-	-
XZN M10	25	C 6.3 (1/4 inch)	914	•	-	-
XZN M4	50	E 6.3 (1/4 inch)	-	-	300	•
XZN M5	50	E 6.3 (1/4 inch)	-	-	301	•
XZN M6	50	E 6.3 (1/4 inch)	-	-	302	•
XZN M8	50	E 6.3 (1/4 inch)	-	-	303	•
XZN M10	50	E 6.3 (1/4 inch)	-	-	304	•
XZN M12	50	E 6.3 (1/4 inch)	-	-	305	•

Prod. Gr. 5HE



Square bit, 1/4 inch drive

for square socket screws



Execution:

- 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 25 mm
- Tip type: Square-cut
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Tip size		Square tip size 00	Square tip size 0	Square tip size 1	Square tip size 2	Square tip size 3	Square tip size 4
52983 Ident. No.	900	901	902	903	904	905	
32703	Ident. No.	•	•	•	•	•	•

Prod. Gr. 5HE

Tri-wing and torq-set bits, 1/4 inch drive, length 25 mm

for security screws



- 1/4"-external hexagon drive, type C 6.3 according to DIN 3126/ISO 1173
- Chromium-vanadium steel
- fully hardened

Technical data:

- Blade length: 25 mm
- Surface: Uncoated
- Drive: C 6.3 (1/4 inch)



Ident. No. 940-943

Ident. No. 930-934

Tip size	Tip type	52983 Ident. No.
TW1	-	930 •
TW2	-	931

Tip size	Tip type	52983 Ident. No.
TW3	-	932
TW4	-	933
TW5	-	934
TQ6	TQ	940
TQ8	TQ	941
TQ10	TQ	942
TQ1/4 inch	TQ	943

Prod. Gr. 5HE



Bit box


32 pieces, format C 6.3



- High-strength plastic box with opening mechanism
- Cross-head bits with tough torsion zone
- Two-component handle with bit holder mount
- Bit holder for C and E 6.3 bits

Advantage:

- Torsion zone for reduced risk of the bits breaking under high stress
- Resistant to wear
- Special play-free clamping for optimum hold







Ident. No. 010



Ident. No. 020

ATORN Bit box

32 and 61 pieces, type C 6.3




- High-strength plastic box with opening mechanism
- Cross-head bits with tough torsion zone
- Bit holder for C and E 6.3 bits
- Ident. No. 040:
- Bit ratchet with fine teeth
- 1/4"-bit direct mount
- Anti-clockwise/clockwise rotation using reversing lever

Advantage:

- Special play-free clamping for optimum hold
- Ident. No. 030:
- Torsion zone for reduced risk of the bits breaking under high stress
- Resistant to wear
- Ident. No. 040: Bit ratchet good at getting into difficult-to-reach areas



Ident. No. 030



Prod. Gr. 5HE



Ident. No. 040




17 pieces, format C 6.3



Execution:

- Box made from high-strength plastic
- Transparent cover with opening mechanism
- Quick-change holder with aluminium sleeve and magnet
- Quick-change bit holder for C and E 6.3 bits







ATORN

Bit holder 1/4 inch

With screwdriver handle





Execution:

- Ident. No. 200:
- CentroFix bit holder with special clearance-free clamping for perfect concentricity
- Type C and E 6.3

- Ident. No. 210: Quick-change bit holder for 1/4" bits, type C 6.3
- Ident. No. 220: 2-component bit handle with hexagon blade 125 mm and magnetic 1/4" bit holder
- Ident. No. 225, 240: 2-component bit handle with circular blade and magnetic 1/4-inch bit holder
- Ident. No. 230: 2-component handle for direct mounting of both 1/4" bit holders
- Ident. No. 240: ESD tested and approved

Technical data:

■ Bit holder: 1/4 inch hexagon



Ident. No. 200



Ident. No. 210







Ident. No. 225



Ident. No. 230



Ident. No. 240

Blade length (mm)		-	-	125	100	-	100
Length (mm)		60	50	200	205	110	204
Tip size		-	-	-	1/4 inch	-	1/4 inch
Tip type		-	-	-	Hexagon socket	-	Hexagon socket
52841	ldent. No.	200	210	220	225	230	240

Prod. Gr. 5HE

ATORN Magazine bit holder



Execution:

- Telescopic bit magazine equipped with 7 bits
- Bit holder with magnetic mount, 1/4"
- Ident. No. 150: With ratchet function switch using dial - right/left or rigid

Advantage:

- Seam-free, smooth cap for minimum friction
- Ergonomic easy-grip soft coating for optimum torques

Bit holder		1/4 inch hexagon	1/4 inch hexagon
Slot width (mm)		5.5	5.5
Tip size		PH1 PH2 PZ1 PZ2	PH1 PH2 PZ1 PZ2 Slot 5.5 mm TX15 TX20 TX25
Blade length (mm)		112	50
Length (mm)		217	175
52853	ldent. No.	100 •	150 •

Prod. Gr. 5HE



Ident. No. 150



ATORN High-performance ratchet with 180° angle mechanism

With 1/4 in quick-change bit chuck





- Super strong switching mechanism with fine toothing 48 teeth/7.5° return angle
- The angle mechanism enables extremely high torques up to 50 Nm
- This makes it possible to switch from axial screwdriver mode to one of the four bend angle without the need to reconnect.
- Handle is non-detachably connected to the forged

Advantage:

■ Minimal effort thanks to perfect ergonomics

Technical data:

■ Bit holder: 1/4 inch hexagon

■ Tip size: 1/4 inch ■ Length: 181 mm



52853... Prod. Gr. 5HE

ATORN Hexagonal sockets



- With 2-component handle
- Hardened and brushed chromium-plated blade

Technical data:

- Blade length: 125 mm
- Material of handle: 2-component plastic
- Surface: Chrome plated
- Material: Chrome-vanadium steel



Ident. No. 100

Width across	s flats	4 mm	5 mm	5.5 mm	6 mm	7 mm	8 mm	9 mm	10 mm	11 mm	12 mm	13 mm
Length (mm))	217	217	217	217	217	217	217	217	227	227	227
52159	ldent. No.	040	050	055	060	070	080	090	100	110	120	130
02107	ident. No.	•	•	•	•	•	•	•	•	•	•	•

Prod. Gr. 5HG

ATORN Hexagon socket screwdriver

with flexible blade




Application:

Variable screw fastening in hard-to-reach positions

Execution:

- Flexible spring steel blade torsion-resistant and plastic-coated
- Output is pressed in a twist-proof manner
- Ergonomically shaped two-component handle with optimum power transmission properties
- Hardened and chrome-plated inserts.
- accommodating all 1/4 in bits



Technical data:

■ Material of handle: 2-component plastic



Ident. No. 306



Ident. No. 314

Bit holder		-	-	-	-	-	1/4 inch hexagon
Width across flats		5 mm	6 mm	7 mm	8 mm	10 mm	1/4 inch
Blade length (mm)		153	153	153	153	178	178
Length (mm)		266	266	266	266	291	291
52160	Ident. No.	305	306	307	308	310	314
52100	ident. No.	•	•	•	•	•	•



ATORN Hexagonal socket with T-handle

with 2-component handle



Execution:

- Comfortable non-slip soft coating provides for optimal power transmission
- Hard core for lasting blade/handle connection even under the highest loads
- Blade made of special CrV and CrMV alloy
- Optimal performance data up to 100% above DIN values
- Matt chrome-plated blade
- With hole for hanging

Technical data:

- Material of handle: 2-component plastic
- Surface: Chrome plated



Ident. No. 420



Ident. No. 474

Width across flats	Blade length (mm)	52167 Ident. No.
7 mm	125	410
8 mm	125	420
8 mm	230	422
8 mm	350	424
9 mm	125	430
9 mm	230	432
10 mm	125	440

Width across flats	Blade length (mm)	52167 Ident. No.
10 mm	230	442
10 mm	350	444
11 mm	125	450
11 mm	230	452
12 mm	125	460
12 mm	230	462
13 mm	125	470

Width across flats	Blade length (mm)	52167 Ident. No.
13 mm	230	472
13 mm	350	474
14 mm	125	480
15 mm	125	490
16 mm	125	500
17 mm	125	510

Prod. Gr. 5HG

IRION Hexagon tubular socket screwdriver

seamless, made of hardened, chrome-plated C35





Application:

Ideally suited for far-projecting threaded pins.

Execution:

■ Impact-resistant plastic handle

recr	ınıcaı	data
_	_	

■ Surface: Chrome plated

■ Material: Hardened steel



Prod. Gr. 5LB

DRION Triangular socket (DIN 22417)



■ Movable T-handle

Technical data:

- Surface: Chrome plated
- Material: Steel pipe

Suitable for s	crew	M4	M5	M6	M8	M10	M12
Length (mm)		90	100	112	125	140	160
52170	Ident. No.	040	050	060	080	100	120
02170	ident. 140.	•	•	•	•	•	•





ORION Hexagon tubular socket screwdriver



Execution:

■ Made from steel pipe

Unhardened



■ Material: Steel pipe



Width across flats	Length (mm)	Hole Ø of mount (mm)	Surface	52174 Ident. No.
8 mm	100	6	Chrome plated	080
9 mm	110	6	Chrome plated	090
10 mm	120	6	Chrome plated	100
11 mm	120	6	Chrome plated	110
12 mm	140	8	Chrome plated	120 •
13 mm	140	8	Chrome plated	130
14 mm	140	8	Chrome plated	140
17 mm	150	10	Chrome plated	170
19 mm	160	12	Chrome plated	190
22 mm	170	12	Chrome plated	220
24 mm	180	14	Chrome plated	240

Width across flats	Length (mm)	Hole Ø of mount (mm)	Surface	52174 Ident. No.
27 mm	190	14	Chrome plated	270
30 mm	200	16	Chrome plated	300
32 mm	210	16	Chrome plated	320
36 mm	220	18	Chrome plated	360 ●
41 mm	240	18	Chrome plated	410
46 mm	245	20	Lacquered	460
50 mm	245	20	Lacquered	500
55 mm	245	20	Lacquered	550
60 mm	250	25	Lacquered	600
65 mm	250	25	Lacquered	650 ●
70 mm	250	25	Lacquered	700

Prod. Gr. 5LB

PRION Hexagon tubular socket screwdriver (DIN 896)

made of C35 steel



Execution:

- With tommy bar hole on both sides

Technical data:

■ Surface: Chrome plated Material: Hardened steel



Width across flats	Length (mm)	Hole Ø of mount	52176
		(mm)	Ident. No.
6 x 7 mm	100	6	020
7 x 8 mm	100	6	030
8 x 9 mm	100	6	040
8 x 10 mm	120	6	050
9 x 10 mm	120	6	060
10 x 11 mm	120	6	080
10 x 13 mm	140	8	100
11 x 13 mm	140	8	120 •
12 x 13 mm	140	8	140
12 x 14 mm	140	8	150
13 x 14 mm	140	8	155 •
13 x 15 mm	140	8	160
13 x 17 mm	150	10	170
14 x 15 mm	140	8	180
14 x 17 mm	150	10	190 •
16 x 17 mm	150	10	200
17 x 19 mm	160	12	210

Width across flats	Length (mm)	Hole Ø of mount (mm)	52176 Ident. No.
18 x 19 mm	160	12	230
19 x 22 mm	170	12	240
20 x 22 mm	170	12	260
21 x 23 mm	170	14	270
22 x 24 mm	180	14	280
24 x 26 mm	180	14	300
24 x 27 mm	180	14	310
25 x 28 mm	180	16	330
27 x 30 mm	200	16	350 ●
27 x 32 mm	200	16	360 ●
30 x 32 mm	200	16	370 ●
30 x 36 mm	220	18	380
32 x 36 mm	220	18	390 ●
36 x 41 mm	245	18	400
41 x 46 mm	245	20	410
46 x 50 mm	245	20	420

Prod. Gr. 5LB

PRION Hexagon tubular socket screwdriver set (DIN 896)



Execution:


■ With stepped tommy bar

Hardened

■ With tommy bar hole on both sides

Delivery:

In cardboard packaging



Prod. Gr. 5LB





DRION Cranked box wrench

Hollow curved version



Execution:

- With identical wrench sizes
- Can also be used with plug-in tommy bar

Technical data:

- Surface: Chrome plated
- Material: Chrome-vanadium steel



Advantage:

■ The hollow shape allows deep screws and nuts to be tightened/loosened

Width across flats	Length (mm)	Hole Ø of mount (mm)	Head Ø (mm)	52183 Ident. No.
6 mm	105	6	10	506 ●
7 mm	110	6	12	507
8 mm	115	6	13	508
9 mm	122	6	14	509
10 mm	130	8	15.5	510
11 mm	136	8	16.5	511 •
12 mm	145	8	18	512
13 mm	152	8	19.5	513
14 mm	160	10	21	514
15 mm	170	10	22.5	515

Width across flats	Length (mm)	Hole Ø of mount (mm)	Head Ø (mm)	52183 Ident. No.
11010		11104111 (111111)		
16 mm	178	12	24	516 ●
17 mm	187	12	25.5	517
19 mm	205	14	28	519
21 mm	225	14	32	521 ●
22 mm	230	14	32	522 ●
24 mm	250	18	30.3	524
27 mm	280	20	38	527
30 mm	310	20	42	530
32 mm	330	20	45	532

Prod. Gr. 5LB

ORION® Tommy bar

cylindrical, solid

Application:

For tubular hexagon box wrenches with transverse

Technical data:

■ Surface: Chrome plated

■ Material: Chrome-vanadium steel



Execution:

■ Rounded ends

Ø (mm)		5	6	8	10	12	14	16	18	20	25
Length (mm)		120	150	180	200	250	320	400	500	630	700
52185	ldent. No.	050	060	080	100	120	140	160	180	200	250

Prod. Gr. 5LB

ATORN Construction and electrical MasterKey



Application:

Suitable for actuating locking systems in the areas of facilities engineering, gas and water supply systems and shut-off systems.

Execution:

■ Made from die-cast zinc

- With reversible bit
- Bottle opener function

Technical data:

■ Slot width: 7 mm

Tip size		PH2 Two-way bit 3-5 mm Square drive, 5 mm Square drive, 6 mm Square drive, 8 mm Square drive, 9 mm	PH2 Square drive, 5 mm Square drive, 6 mm Square drive, 8 mm Square drive, 9 mm Conical external square, 6-10 mm		
Length x width		75 x 110 mm	75 x 135 mm		
52188	ldent. No.	010 •	020 •		





Ident. No. 010



Ident. No. 020



IRION® Square head wrench and key

made from special hardened steel



Execution:

■ Welded T-handle

- No. 52192: With square socket
- No. 52193: With external square



No. 52192

No. 52193

Width across flats	Shaft length (mm)	Outer Ø (mm)	52192 Ident. No.	52193 Ident. No.
4 mm	50	-	040	040
5 mm	60	-	050	050 ●
6 mm	80	-	060	060 ●
7 mm	80	-	070	070
8 mm	80	-	080	080
9 mm	85	-	090	090
10 mm	100	-	100	100
11 mm	100	-	110	110
12 mm	100	-	120	120
13 mm	100	-	130	130

Width across	Shart length	Outer 6	32 192		5219	
flats	(mm)	(mm)	Ident. No).	Ident.	No.
4 mm	50	-	040	•	040	•
5 mm	60	-	050	•	050	•
6 mm	80	-	060	•	060	•
7 mm	80	-	070	•	070	•
8 mm	80	-	080	•	080	•
9 mm	85	-	090	•	090	•
10 mm	100	-	100	•	100	•
11 mm	100	-	110	•	110	•
12 mm	100	-	120	•	120	•
13 mm	100	-	130	•	130	•
D 1.0 FLD						

Width across flats	Shaft length (mm)	Outer Ø (mm)	52192 Ident. No.	5219 Ident.	
14 mm	120	28	140	-	-
15 mm	140	-	150	150	•
16 mm	145	-	160	160	•
17 mm	160	-	170	170	•
18 mm	160	-	180	-	-
19 mm	200	-	190	-	-
20 mm	200	-	200	-	-
22 mm	200	-	220	-	-
24 mm	250	-	240	-	-
14 mm	120	-		140	•

Prod. Gr. 5LB

Torque screwdriver

for interchangeable blades

Execution:

- precise and simple adjustment
- audible and haptic release when the set torque is
- ergonomically shaped handle for optimum force
- robust aluminium sealing cap with easily readable adjustment scale

Delivery:

certificate, user manual and adjustment key









Ident. No. 011

Ident. No. 021

Ident. No. 031

Min./max. torque measuring range		0.6-1.5 Nm	1.5-3.0 Nm	3.0-5.4 Nm
Scale value torque (Nm)		0.1	0.1	0.1
Blade Ø (in)		1/4	1/4	1/4
Handle length (mm)		105	105	105
Material of handle		2-component plastic	2-component plastic	2-component plastic
Error limit (%) (%)		6	6	6
Calibration certificate		Yes	Yes	Yes
52200	Ident. No.	011	021	031
32200	ident. No.	•	•	•

Prod. Gr. 5HC



Torque screwdriver set

for interchangeable blades














Application:

For controlled and secure screwing — cannot be $\,$ overtightened

- set of 2 torque screwdriver handles: 0.6 Nm to 1.5 Nm and 1.5 Nm to 3.0 Nm
- Complete with adjustment tool, bit holder blade and 10 1/4" bits
- error limit: +/- 6%
- robust aluminium sealing cap with easily readable adjustment scale

with certificate and directions, in impact-resistant plastic box with foam insert









ATORN Blades for slotted screws

for torque screwdrivers no. 52200 011-061



Execution:

■ Blade diameter 1/4"

■ For torque screwdrivers no. 52200 010-030

Technical data:

■ Blade length: 170 mm

■ Blade diameter: 1/4 in

Width of cutting edge (mm)	3.0	3.5	4.0
52200	ldent. No.	230 •	235 •	240 •

Prod. Gr. 5HC



Blades for Phillips screws

for torque screwdrivers no. 52200 011-061





For PHILLIPS screws

Execution:

■ Blade diameter 1/4"

■ For torque screwdrivers no. 52200 010-030

Technical data:

■ Blade length: 170 mm ■ Blade diameter: 1/4 in

Tip size		PH0	PH1	PH2	PZ0	PZ1	PZ2
52200	Ident. No.	300 •	301 •	302 •	310 •	311 •	312 •

Prod. Gr. 5HC



Blades for hexagon socket screws

for torque screwdrivers 52200 011-061



■ Blade diameter 1/4"

■ For torque screwdrivers no. 52200 010-030

Technical data:

■ Blade length: 170 mm ■ Blade diameter: 1/4 in

Width across fla	ats	1.5 mm	2 mm	2.5 mm	3 mm	4 mm
52200	ldent. No.	315	320	325	330	340

Prod. Gr. 5HC



Blades for TX and TX Plus screws

for torque screwdrivers no. 52200 011-061





Application:

Ident. No. 106-125: For TX screws Ident. No. 206-225: For TX Plus screws

Execution:

■ Blade diameter 1/4"

■ Ident. No. 106-125: For torque screwdrivers no. 52200 011 - 031

■ Ident. No. 206–225: For torque screwdrivers no. 52200 010-030

Technical data:

■ Blade length: 170 mm ■ Blade diameter: 1/4 in

Tip size	52200
·	Ident. No.
TX6	106
TX7	107
TX8	108
TX9	109
TX10	110
TX15	115

Prod.	Gr.	5HC

Tip size	52200
•	Ident. No.
TX20	120
TX25	125
TXP6	206
TXP7	207
TXP8	208
TVD0	200

	Tip size	52200 Ident. No.
	TXP10	210 •
٦	TXP15	215
	TXP20	220
	TXP25	225

Ident. No. 106-125

Ident. No. 206-225

Ident. No. 300

Ident, No. 310



for torque screwdrivers no. 52200 011-061



Execution:

■ Blade diameter 1/4"

■ For torque screwdrivers no. 52200 010-030

Blade length (mm)		170
Blade Ø (in)		1/4
52200	Ident. No.	400 ●

Prod. Gr. 5HC



19 or 30 pieces, in plastic box with foam insert







Application:

Ident. No. 100: For controlled screw tightening between 0.6 to 5.5 Nm

Ident. No. 110: For controlled screw tightening between 0.6 to 3.0 Nm

Execution:

- Precise deviation tolerance of +/- 10%
- Tactile indication and clicking noise when torque
- Integrated safety clutch prevents the screw joint from being overtightened
- Carbon steel body with 43-48 HRC, electrically nickel-plated
- Industrial bit inserts made from hardened bit steel 58-60 HRC, with colour-coded rings
- Precision quick-change chuck with bit lock
- Ident. No. 100:
 - Pre-set torque limiters with the values 0.6/0.9/1 .2/1.4/2.0/3.0/5.0/5.5 Nm
- Coloured outer sleeve with printed torque value - The matching bit insert, which is also colour-coded, can therefore be selected without any problems.
- Ergonomically shaped two-component screwdriver handle and two-component t-handle with optimum power transmission properties

■ Ident. No. 110:

- Pre-set torque limiters with the values 0.6/0.9/1.2/1.4/2.0/3.0 Nm
- Coloured outer sleeve with torque value printed on - this makes it easy to select the right bit insert, which features the same colour coding.
- Ergonomically shaped two-component handle with optimum power transmission properties

Advantage:

- Optimum protection against overtightening sensitive screw connections
- Easy to handle thanks to the colour coding

Delivery:

Ident. No. 100: 50 mm bit inserts. Sizes: TX 6, 7, 8, 9, 10, 15, 20, 25, TX plus 6, 7, 8, 9, 10, 15, 20, 25, HEX (hexagon socket) 2.0/2.5/3.0/4.0 mm

Ident. No. 110: 50 mm bit inserts. Sizes: TX 6, 7, 8, 9, 10, 15, TX plus 6, 7, 8, 9, 10, 15

Technical data:

- Blade length: 50 mm
- Handle length: 100 mm
- Material of handle: 2-component plastic
- Error limit (%): 10

Min./max. torque measuring ra	nge	0.6-5.5 Nm	0.6-3.0 Nm	
52199	Ident. No.	100 •	110 •	





Ident. No. 100



ATORN Torque limiter

With 1/4 inch E 6.3 x 25 mm recess and 1/4 inch bit holder



Application:

For controlled screw tightening.

Execution:

- Fixed pre-set torque values
- Precise deviation tolerance of +/- 10%
- Tactile indication and clicking noise when torque is reached
- Integrated safety clutch prevents the screw joint from being overtightened
- Coloured outer sleeve with printed torque value The matching bit insert, which is also colourcoded, can therefore be selected without any problems.
- Carbon steel body with 43-48 HRC, electrically nickel-plated

Advantage:

- Optimum protection against overtightening sensitive screw connections
- Easy to handle thanks to the colour coding

Technical data:

- Length: 53 mm
- Error limit (%): 10



FOR MORE DETAILS OR PRODUCTS, PLEASE VISIT OUR ONLINE SHOP WWW.HAHN-KOLB.COM

Screwdriving tools \ Torque screwdriver

Min./max. to range	rque measuring	0.6-0.6 Nm	0.9-0.9 Nm	1.2-1.2 Nm	1.4-1.4 Nm	2.0-2.0 Nm	3.0-3.0 Nm	3.5-3.5 Nm	4.0-4.0 Nm	5.0-5.0 Nm	5.5-5.5 Nm
Colour		Red	Brown	Green	Yellow	Purple	Blue	Anthracite	Anthracite	Grey	Black
52199	ldent. No.	206	209	212	214	220	230	235	240	250	255
32 177	ident. No.	•	•	•	•	•	•	•	•	•	•

Prod. Gr. 5HC

TX bit insert 1/4 in for torque limiter

with colour coding



Application:

In conjunction with the colour-matched torque limiter insert

Execution:

• High-quality, wear-resistant industrial bit, length 50 mm

- Hardened bit steel with 58-60 HRC
- Colour-coded ring

Advantage:

 Colour assignment to easily select the correct bit to match the torque

Technical data:

- Tip type: TX
- Blade diameter: 1/4

 Blade 	iength:	50	ШШ



Prod. Gr. 5HC

ATORN TX-IP (TX with centre borehole) bit insert 1/4 inch for torque limiter

with colour coding



In conjunction with the colour-matched torque limiter insert

Execution:

 High-quality, wear-resistant industrial bit, length 50 mm

- Hardened bit steel with 58-60 HRC
- Colour-coded ring

Advantage:

 Colour assignment to easily select the correct bit to match the torque

Technical data:

- Tip type: TX-Plus ■ Blade diameter: 1/4
- Blade length: 50 mm

						E		1	=
Ide	ent. No. 407		Ident. No.	409	Id	ent. No. 415		Ident. No.	425
Tip size		TXP6	TXP7	TXP8	TXP9	TXP10	TXP15	TXP20	TXP25
Colour		Red	Brown	Green	Yellow	Purple	Blue	Grey	Black
52199	ldent. No.	406 •	407 •	408 •	409 •	410	415 •	420	425 •

Prod. Gr. 5HC

Hexagon socket bit insert 1/4 inch for torque limiter

with colour coding



In conjunction with the colour-matched torque limiter insert

Execution:

· High-quality, wear-resistant industrial bit, length 50 mm

- Hardened bit steel with 58-60 HRC
- Colour-coded ring

Advantage:

•

 Colour assignment to easily select the correct bit to match the torque

Technical data:

•

- Tip type: Hexagon ■ Blade diameter: 1/4
- Blade length: 50 mm



•

Prod. Gr. 5HC

•



ATORN Bit holder for torque limiter as screwdriver handle or T-handle 1/4 inch

For holding all C and E 6.3 (1/4 inch) bits, with quick-change chuck



Execution:

- Ident. No. 100:
- Ergonomically shaped 2-component handle with comfortable soft zone and optimum power transmission properties.
- Quick-change chuck, 1/4 inch, E 6.3 with secure bit locking
- Slim and handy design
- Ident. No. 110:

- Ergonomically shaped two-component handle with optimum power transmission properties
- Precision quick-change chuck with bit lock

Technical data:

- Bit holder: 1/4 inch hexagon
- Blade length: 40 mm
- Tip size: 1/4 inch
- Tip type: Hexagon socket

Length (mm)		139	-
Handle length (mm)		-	50
Material of handle		-	2-component plastic
52988	Ident. No.	100	110
32900	ident. No.	•	•

Prod. Gr. 5HE



Ident. No. 100



Ident. No. 110

ATORN Torque wrench with reversible ratchet

with calibration certificate according to DIN EN ISO 6789

Application:

For controlled tightening in a clockwise direction with a high degree of accuracy

- The torque is set by turning the handle
- With lever ratchet, suitable only for controlled clockwise tightening.
- Haptic and acoustic adjustment aid
- Audible and perceptible release when the set value is reached
- Dual scale with Nm and lbf.ft. display
- Ergonomically shaped handle with comfortable, textured surface
- Rapid securing and opening via the locking ring

Advantage:

■ Robust tubular design

- Reversible ratchet with locking push button
- Viewing window protects scale from damage

Delivery:

Secure and safe transport/storage in handy cylindrical package

Technical data:

With scale: Yes



Ident. No. 060

Tip size		1/4 inch	1/4 inch	3/8 inch	1/2 inch	1/2 inch	1/2 inch
Scale value torque (N	m)	0.1	0.25	0.5	1	1	2
Min./max. torque me	asuring range	1-6 Nm	2.5-25 Nm	10-60 Nm	20-120 Nm	40-200 Nm	60-320 Nm
Length (mm)		234	274	355	456	551	621
Error limit (%)		4	3	3	3	3	3
52240	ldent. No.	006	025	060	120	200	320
02240	ident. No.	•	•	•	•	•	•

Prod. Gr. 5HC

ATORN Torque wrench with square mount

with calibration certificate in line with DIN EN ISO 6789

Execution:

- Adjustable torque wrench
- For holding square plug-in tools
- Haptic and acoustic adjustment aid
- Audible and perceptible release when the set value is reached
- Dual scale with Nm and lbf.ft. display
- Ergonomically shaped handle with comfortable, textured surface
- Rapid securing and opening via the locking ring

Advantage:

Robust tubular design

- Plug-in square with locking push button
- Viewing window protects scale from damage

- Error limit (%): 3
- With scale: Yes



Ident. No. 120

Min./max. torque me	asuring range	2.5-25 Nm	10-60 Nm	20-120 Nm	20-120 Nm	40-200 Nm	60-320 Nm
Scale value torque (N	m)	0.25	0.5	1	1	1	2
Insert shank square		9 x 12 mm	9 x 12 mm	9 x 12 mm	14 x 18 mm	14 x 18 mm	14 x 18 mm
Length (mm)		258	312	393	393	488	558
52241	ldent. No.	025	060	110	120	200	320
52241 ident. No.		•	•	•	•	•	•

Prod. Gr. 5HC

ATORN Malleable iron screw clamp

non-slip and spindle safety device

Application:

For rigidly clamping various workpieces together.

Execution:

- Robust design with corrugated, reinforced malleable cast iron arms
- Profile rail with corrugation, galvanised surface
- Smooth running, burnished steel spindle with trapezoidal thread
- Clamping jaws with plastic protective caps
- Clamping force up to 6000 N

Advantage:

■ Ergonomic two-component handle for optimum force transmission

Technical data:

■ Material of handle: 2-component plastic



Max. clamping	width (mm)	120	160	200	250	300	400	500	600	800
Overhang (mm	1)	65	80	100	120	140	175	120	120	120
Rail cross-sect	ion L x W	22 x 6 mm	22 x 6 mm	30 x 8 mm	30 x 8 mm	35 x 9 mm	35 x 9 mm	35 x 11 mm	35 x 11 mm	35 x 11 mm
51102	ldent. No.	012 •	016	020	025 •	030	040	050 •	060 •	080

Prod. Gr. 5HJ

ATORN All-steel screw clamp

non-slip and spindle safety device

Application:

For sprung and elastic clamping of a range of workpieces.

Execution:

- Fixed clamp made of cold-drawn profile steel, hardened and galvanised
- Sliding clamp drop-forged, hardened and galvanised
- Movable pressure plate with integrated spindle safety device

 Smooth running, burnished steel spindle with trapezoidal thread

Advantage:

■ Ergonomic two-component handle for optimum force transmission

Technical data:

■ Material of handle: 2-component plastic



Max. clamping w	ridth (mm)	120	160	200	250	300	400	500	600
Overhang (mm)		60	80	100	120	140	120	120	120
Rail cross-sectio	n L x W	13.5 x 6.5 mm	16 x 7.5 mm	19.5 x 9.5 mm	22 x 10.5 mm	25 x 12 mm			
51105	ldent. No.	012	016	020	025	030	040	050	060
31103	ident. No.		•			•		•	•

Prod. Gr. 5HJ

ATORN Combination pliers

Application:

For gripping, holding and cutting.

Execution:

- Special tool steel for hard and soft wire
- Serrated gripping surfaces, inductively hardened blades
- Oil-hardened

■ Ident. No. 710-730: Safe, ergonomic and effortless work thanks to 2-component handles with slip guard

Technical data:

• Max. medium wire diameter cutting capacity: 1.6



Ident. No. 510-530



Ident. No. 710-730

Length (mm)	Surface	Material of handle	53232
			Ident. No.
160	Plain	Polyvinyl chloride	510
180	Plain	Polyvinyl chloride	520 ●
200	Plain	Polyvinyl chloride	530
160	Chrome plated	2-component plastic	710
180	Chrome plated	2-component plastic	720
200	Chrome plated	2-component plastic	730

Prod. Gr. 5HZ

Pliers sets Workpiece equipment

Execution:

- Serrated gripping surfaces, inductively hardened blades
- Side cutters, 160 mm, 2-component handles, chrome-plated head

■ Ident. No. 805:

- Combination pliers 180 mm, 2-component handles, chrome-plated head
- Snipe nose pliers 160 mm, 2-component handles, chrome-plated head
- Water pump pliers 250 mm, PVC-dipped handles, box joint, quick adjustment, polished surface

■ Ident. No. 808:

- Combination pliers 200 mm, 2-component handles, chrome-plated head
- Snipe nose pliers, straight, 200 mm, 2-component handles, chrome-plated head
- Snipe nose pliers, bent, 200 mm, 2-component handles, chrome-plated head
- Heavy-duty side-cutters 180 mm, 2-component handles, chrome-plated head
- Water pump pliers 250 mm, quick adjustment,
 2-component handles, chrome-plated head

Delivery

In robust plastic case

[
Number of pieces in assortment,	/set (PCS)	4	6	
Composition of set		Combination pliers 180 mm Side cutters 160 mm Snipe nose pliers 160 mm Water pump pliers 250 mm	Combination pliers 200 mm Side cutters 160 mm Straight snipe nose pliers 200 mm Bent snipe nose pliers 200 mm Heavy-duty side cutters 180 mm Water pump pliers 250 mm, quick adjustment	
53232	ldent. No.	805 ●	808 •	





Ident. No. 805



Ident. No. 808

Heavy-duty pliers set with heavy-duty joint

Execution:

- Three-component handles with thumb recess and anti-slip protection
- Serrated gripping surfaces, inductively hardened blades
- Matt chrome-plated surfaces
- Heavy-duty side cutters, 160 mm, for piano wire
- Heavy-duty pointed pliers, 180 mm, with spring
- Water pump pliers, 240 mm, with box joint and quick adjustment

Technical data:

Number of pieces in assortment/set: 3 PCS

- Composition of set: Heavy-duty side cutters 160 mm for piano wire
- Heavy-duty needlenose pliers 180 mm with spring
- Water pump pliers 240 mm with box joint and quick adjustment







53232	Idont No	803
33232	Ident. No.	•

Prod. Gr. 5HZ

DRION[®] Combination pliers

Application:

For gripping, holding and cutting.

Execution:

- Serrated gripping surfaces
- Polished head

Length (mm)		180
Surface		Plain
Material of handle		Polyvinyl chloride
Max. medium wire Ø cutting capacity (mm)		2
53233	ldent. No.	180 •





ATORN Heavy-duty combination pliers

With power joint

Application:

for gripping, holding and cutting.

Execution:

- power joint with up to 30% power saving
- secure retention of workpieces with 4-point involute burner hole
- with opening spring for optimal handling (simple to disassemble)
- special tool steel for hard and soft wire
- Toothed gripping surfaces, extra-long inductively hardened blades
- Three-component handles with thumb recess and anti-slip protection

Technical data:

- Surface: Chrome plated
- VDE certified: No
- Material of handle: 3-component plastic



Length (mm)		160	180	200
Max. medium wire Ø cutting capacity (mm)		2.2	2.5	2.7
53231 Ident. No.		016 •	018 •	020 •

Prod. Gr. 5HZ

ATORN Heavy-duty needlenose pliers

With power joint

Application:

for gripping, holding and cutting.

Execution:

- power joint with up to 30% power saving
- secure retention of workpieces with 4-point involute burner hole
- with opening spring for optimal handling (simple to disassemble)
- special tool steel for hard and soft wire
- Pointed, powerful head and slim shape, guide profile hole for guiding and bending
- Three-component handles with thumb recess and anti-slip protection

Technical data:

- Surface: Chrome plated
- VDE certified: No
- Material of handle: 3-component plastic



Length (mm)		160	180	200
Max. medium wire Ø cutting capacity (mm)		2.2	2.5	2.7
53090	ldent. No.	016 ●	018 ●	020 •

Prod. Gr. 5HZ

ATORN Heavy-duty combination pliers

Application:

For gripping, holding and cutting.

Execution:

- For hard and soft and piano wire
- Serrated gripping surfaces
- Inductively hardened blades

• 35% less force required when cutting piano wire

Technical data:

- Length: 200 mm
- Max. medium wire diameter cutting capacity: 2.2



Ident No 720

Surface		Plain	Chrome plated
Material of handle		Polyvinyl chloride	2-component plastic
53236	Ident. No.	520 •	720 •

Prod. Gr. 5HZ

Heavy-duty combination pliers

Optimised power joint

Application:

for gripping, holding and cutting.

Execution:

- power joint with up to 30% power saving
- secure retention of workpieces with 4-point involute burner hole
- with opening spring for optimal handling (simple to disassemble)
- special tool steel for hard and soft wire
- serrated gripping surfaces, inductively hardened blades

Advantage:

safe, ergonomic and effortless work thanks to 2-component handles with slip guard

Technical data:

- Length: 180 mm
- Surface: Chrome plated
- Material of handle: 2-component plastic
- Max. medium wire diameter cutting capacity: 3.5 mm





ATORN Heavy-duty telephone pliers

with power joint

Application:

For gripping, holding, pulling and cutting

Execution:

- Flat, round, straight, finely ground jaws with special profile
- With smooth wave profile and fixed 4-point burner
- Easy cutting thanks to optimised power joint
- Optimum handling of delicate workpieces (copper pipe, thread, cable)
- Three-component handles with thumb recess and anti-slip protection

Technical data:

- Length: 200 mm
- Surface: Chrome plated
- Material of handle: 3-component plastic

53090 Ident. No.	53090	Ident. No.	050 ●
------------------	-------	------------	----------

Prod. Gr. 5HZ

ATORN Snipe nose pliers

Application:

For gripping, holding and cutting.

Execution:

- Special tool steel, oil-hardened
- Serrated gripping surfaces
- Blades inductively hardened for hard and soft wire
- Ident. No. 500-520, 710-720: Flat, round jaws, type A

■ Ident. No. 530, 730: Flat, round jaws, type B, 45°

■ Ident. No. 710-730: Safe, ergonomic and fatiguefree working thanks to two-component handles



Ident. No. 500

Ident. No. 530

Ident. No. 720

Ident. No. 730

		Design	Straight	Curved
Length (mm)	Surface	Material of handle	53092	53092
			Ident. No.	Ident. No.
140	Plain	Polyvinyl chloride	500	
160	Plain	Polyvinyl chloride	510	
200	Plain	Polyvinyl chloride	520 ●	530 ●
160	Chrome plated	2-component plastic	710	715
200	Chrome plated	2-component plastic	720	730

Prod. Gr. 5HZ

DRION[®] Snipe nose pliers

Application:

Suitable for more delicate gripping and cutting tasks.

Execution:

- Flat, round jaws, pointed, straight shape
- Serrated gripping surface
- With blade

Length (mm)			200
Surface			Plain
Material of handle			Polyvinyl chloride
	Design		
53095	Straight	Ident. No.	200 •

Prod. Gr. 593

ATORN Langbeck flat nose-pliers

Application:

For gripping and holding in confined areas.

Execution:


- Special tool steel, oil-hardened
- Long, slim, flat jaws
- Serrated gripping surfaces

Advantage:

■ Ident. No. 710: Safe, ergonomic and fatigue-free working thanks to two-component handles

Technical data:

■ Length: 160 mm







Ident. No. 710

ATORN Snipe nose pliers and spark-plug connector pliers, long version

Application:

Ident. No. 500-520: For gripping and holding in difficult-to-reach areas.

Ident. No. 540: For holding and loosening round, conical and angular objects.

Execution:

Special tool steel, oil-hardened

- Pulling round materials and handling particularly delicate workpieces
- Ident. No. 500: Long, straight, flat, round jaws
- Ident. No. 500-520: Finely ribbed with special
- Ident. No. 520: Long, bent by 35°, flat, round jaws
- Ident. No. 540:
 - Long, bent by 90°, flat, round jaws

• Fine-grooves with burner hole and special tip shape for 15-30-mm diameter

Advantage:

- The optimum position of the centre of rotation guarantees safe and controlled gripping
- Ident. No. 540: The hot engine block is not scorched thanks to the long design



Ident, No. 540

Ident. No. 500 Ident No 520

		Design	Straight	Curved	Curved gripping ring
Length (mm)	Surface			53054 Ident. No.	53054 Ident. No.
280	Chrome plated	Polyvinyl chloride	500	520 •	540 •

Prod. Gr. 5HZ

ATORN Langbeck round-nose pliers

with long, round jaws

Application:

For bending grommets with different radii for wireshaped materials.

Execution:

Special tool steel, oil-hardened

- Long, slim, round jaws
- For bending lugs from 2.5 to 7.5 mm in diameter

• Ident. No. 710: Safe, ergonomic and fatigue-free working thanks to two-component handles

Length (mm)		160	160
Surface		Plain	Chrome plated
Material of handle		Polyvinyl chloride	2-component plastic
Design		Long	Long
53066	ldent. No.	510 •	710 •





Ident. No. 710

ATORN Plier wrench

Application:

For gentle screwing of delicate surfaces

Execution:

- Smooth jaws with stepless parallel movement for gentle gripping or powerful pressing
- Push-button fine adjustment of all widths across flats for comfortable arm positioning
- Strong clamping force thanks to >10:1 lever ratio
- Slightly open the mouth for fast, ratchet-style tightening or loosening of nuts

 Protected scale for presetting the desired width across flats

• Powerful, precisely adjustable screw tool for parallel, full-surface, play-free and secure gripping of multiple edges without damage

Technical data:

- Length: 250 mm
- Width across flats: 52 mm
- Surface: Chrome plated



Ident. No. 400



Ident. No. 410

Material of handle		Polyvinyl chloride	3-component plastic
53075	Ident. No.	400	410
530/5	ident. No.	•	•

Prod. Gr. 5HZ

ATORN Quick-adjustment locking pliers

Application:

For flexible clamping of round and flat material.

Execution:

- Chrome-vanadium alloy
- Jaw width 18 mm

Advantage:

- Optimum flexibility thanks to 4x opening quick-adjustment mechanism
- One-handed adjustment wheel integrated in the
- Ergonomic soft opening system

Length (mm)		250
Min./max. clamping width		0-100 mm
Surface		Chrome plated
53419	ldent. No.	010 •











ATORN Adjustable locking pliers

Top straight jaw, bottom prism jaw or half-round jaws, with wire cutter

Application:

For clamping round and flat material.

Execution:

- One-hand, quick release lever with return spring and pinch guard.
- Carbonated knurled thumb screw with fine thread for precise adjustment of the clamping width and clamping pressure.
- Ident. No. 110-130:
 - Wire groove in upper jaw wires can be gripped and routed from the front

■ Forged and hardened jaws at the top, straight at the bottom with prism, made of chrome-vanadium.

■ Ident. No. 140-160:

- Fine toothing in the front jaw area.
- Forged and hardened jaws half-round form, made of chrome-vanadium.
- Ground wire cutter for cutting welding wires, but also for cutting nails

Technical data:

■ Surface: Nickel plated



Ident. No. 120



Ident. No. 150

Length (mm)	Jaw design	Min./max. clamping width	53420 Ident. No.
180	With prism	0-30 mm	110
250	With prism	0-35 mm	120
300	With prism	0-50 mm	130
180	With wire cutters	0-35 mm	140
250	With wire cutters	0-50 mm	150
300	With wire cutters	0-65 mm	160

Prod. Gr. 5HZ

ATURN Welder's, clamping, parallel clamping, wide jaw locking pliers

with steel jaws

Application:

Ident. No. 200: For clamping profile or flat material edge-to-edge for welding.

Ident. No. 210: For clamping profile and flat material.

Ident. No. 220: For clamping profile and flat material.

Ident. No. 230: For clamping edges and surfaces.

Execution:

- One-hand, quick release lever with return spring and pinch guard.
- Carbonated knurled thumb screw with fine thread for precise adjustment of the clamping width and clamping pressure.

- Ident. No. 200:
- Large clamping distance, easy and flexible clamping - very good vibration absorption
- Simple and efficient dosage, ideal for sensitive
- Ident. No. 200-210: Forged chrome-vanadium iaws.
- Ident. No. 210: Jaw size when closed: 55 x 85 mm, jaw width: 12 mm
- Ident. No. 210-220: Ideal for bulky workpieces or for clamping behind bars.
- Ident. No. 220:
- Movable, forged jaws made of chrome-vanadium.

- Due to the alignment jaws with the large support plates, an excellent clamping effect is achieved even with unbalanced bodies
- Jaw size when closed: 55 x 85 mm, plate: 30 mm
- Ident. No. 230:
- Chrome-vanadium jaws.
- Ideal for clamping, bending and crimping thin and soft sheet metal.
- Jaw width: 80 mm; jaw thickness: 3 mm

Technical data:

Surface: Nickel plated









Ident. No. 210

Ident, No. 220

Length (mm)		280	280	280	180
Jaw design		Discontinued	Discontinued	Round	Flat, wide
Min./max. clamping width		0-60 mm	0-90 mm	0-91 mm	0-45 mm
53420	ldent. No.	200	210	220	230
33420	ident. No.	•	•	•	•

Prod. Gr. 5HZ

DRIDN Lead-sealing pliers

Application:

For pressing plastic and lead seals.


Execution:

- Robust tool steel
- Nickel-plated

Handles coated in plastic

Technical data:

- Surface: Nickel plated
- Material of handle: Polyvinyl chloride





Accessories for		53205 145	53205 225
53210 Plastic seals, orange, 9 x 4.5 mm, pack of 1000	ldent. No.	020 •	-
53210 Lead seals, 9 x 5 mm, pack of 1000	ldent. No.	210 •	-
53212 Spiral wire on roll, weighs 1 kg	ldent. No.	011 •	011 •
53212 Spiral wire on coil, 200 mm sections, weighs 1 kg	ldent. No.	021 •	021 •
53212 Plastic spiral wire on coil, 200 mm sections, weighs 1 kg	Ident. No.	100 •	100
53210 Lead seals, 12 x 5 mm, pack of 500 12 x 5 mm	Ident. No.	-	220 •



ATORN Water pump pliers

with box joint

Execution:

- Long-term reliability thanks to box joint and sharp-gripping, extra-hardened teeth
- Self-clamping on pipes and nuts for safe, energy-saving work
- Robust shape made of durable chrome-vanadium steel

■ Three-component handles with thumb recess and anti-slip protection

Technical data:

- Length: 250 mm
- Max. clamping width: 36 mm
- Surface: Chrome plated
- Material of handle: 3-component plastic



53413	Ident. No.	500 •

with box joint and double guide

Prod. Gr. 5HZ

ATORN Water pump pliers with large gripping range

Execution:

- 30% larger gripping area • enhanced self-clamping with optimised jaw design
- fine adjustment graduations owing to quick-snap ratchet principle
- spring-driven sliding block ensures quicker engagement
- opposing toothing at the back of the jaws ensures aggressive gripping
- inductively hardened, serrated jaws

53413 Ident. No		•	•	•	•	•
E2412 Ident No		018	025	030	180	250
Material of har	ndle	Polyvinyl chloride	Polyvinyl chloride	Polyvinyl chloride	2-component plastic	2-component plastic
Surface		Plain	Plain	Plain	Chrome plated	Chrome plated
Max. clamping width (mm)		42	50	70	42	50
Length (mm)		180	250	300	180	250

Prod. Gr. 5HZ



Ident, No. 025



Ident. No. 250

ATORN Water pump pliers (ISO 8976)

with groove joint

Application:

For gripping pipes, screws or other workpieces.

Execution:

■ Chrome-vanadium steel

Screwed grooved joint with pinch guard

Technical data:

- Surface: Plain
- Material of handle: Polyvinyl chloride

Length (mm)		250	310
Max. clamping width (mm)		35	45
53415	ldent. No.	020	030
00410	ident. No.	•	•





ATORN Water pump pliers (ISO 8976)

with box joint

Application:


For gripping pipes, screws or other workpieces.

Execution:

- Chrome-vanadium steel, high-quality tempering
- Perforated slip joint, extremely robust thanks to double guide
- Safety pinching guard to prevent crushing injuries
- Painted red
- Corrugated handles with yellow plastic coating

Advantage:

■ Self-locking on workpiece, energy-saving and non-slip



Prod. Gr. 5HZ



Water pump pliers (ISO 8976)

with box joint

Execution:

- Chrome-vanadium steel
- Painted red
- Serrated gripping surfaces

Technical data:

- Surface: Plain
- Material of handle: Steel



Length (mm)		250	300
Max. clamping width (mm)		40	50
53418	Ident. No.	250 •	300 •

Prod. Gr. 593

ATORN Slip joint pliers

Execution:

- Chrome-vanadium steel, drop-forged
- Inductively hardened jaw
- With box joint and 13x notches

Advantage:

- Pinch guard provides added safety
- Self-clamping with optimised jaw design
- Non-slip and gentle to edges due to play-free frictional connection



Length (mm)	260		
Width across flats	36 mm		
Surface		Chrome plated	
Material of handle		Polyvinyl chloride	
53417	ldent. No.	500 •	

Prod. Gr. 5HZ

Pipe wrench (DIN 5234)

Chromium-vanadium steel, Swedish form

Application:

For gripping pipes and pipe collars.

Execution:

- Chrome-vanadium steel, forged, tempered
- Swedish type, head angled by 90°
- Teeth also inductively hardened

Advantage:

- Teeth offset against direction of rotation
- Pinching guard
- Adjustment nut can be locked

Technical data:

- Surface: Cathodic dip painting
- Material of handle: Steel



Size in inches		1	1.5	2
Length (mm)		310	425	540
Max. clamping width (m	im)	49	68	94
53430	Ident. No.	600	610	620

ATORN Corner-pipe wrench (DIN 5234)

Chromium--vanadium -steel, Swedish form

Application:

For gripping pipes and pipe collars.

Execution:

- Forged and tempered
- Swedish type, head angled by 45°
- Teeth also inductively hardened

Advantage:

- Teeth offset against direction of rotation
- Pinching guard
- Adjustment nut can be locked

Technical data:

- Surface: Cathodic dip painting
- Material of handle: Steel

Size in inches		1	1.5	2
Length (mm)		320	445	565
Max. clamping width (m	nm)	55	81	94
53431 Ident. No.		600	610	620
55451	ident. No.	•	•	•

Prod. Gr. 5HZ

ATORN Elbow pipe wrench (DIN 5234)

Swedish form

Application:

For gripping pipes and pipe collars.

Execution:


- Chrome-vanadium steel, forged, tempered
- Swedish type, S-shaped jaws
- Teeth also inductively hardened

Advantage:

- Teeth offset against direction of rotation
- Pinching guard
- Adjustment nut can be locked

Technical data:

- Surface: Cathodic dip painting
- Material of handle: Steel



Prod. Gr. 5HZ

ATORN Straight circlip pliers

for internal circlips

Application:

For mounting and removing inner retaining rings in drill holes.

Execution:

- Chrome-vanadium steel
- Polished joint
- Burnished tips
- Straight tips according to DIN 5256 C

Advantage:

 Hardened and wearproof tips securely hold the rings

Technical data:

- Head design: Straight
- Surface: Plain
- Material of handle: Polyvinyl chloride

Туре		JO	J 1	J 2	J 3	J 4
Length (mm)		140	140	180	225	310
Suitable for mir	n./max. Ø	8-13 mm	12-25 mm	19-60 mm	40-100 mm	85-140 mm
53136	ldent. No.	500 •	510 •	520 •	530 •	540 •

Prod. Gr. 5HZ

ATORN Circlip pliers, angled

for internal circlips

Application:

For mounting and removing inner retaining rings in drill holes.

Execution:

- Chrome-vanadium steel
- Polished joint
- Burnished tips
- Angled tips according to DIN 5256 D

Advantage:

 Hardened and wearproof tips securely hold the rings

Technical data:

- Head design: Angled 90°
- Surface: Plain
- Material of handle: Polyvinyl chloride











ATORN Straight circlip pliers

for external circlips

for external circlips

Application:

For mounting and removing outer retaining rings on shafts.

Execution:


- Chrome-vanadium steel
- Polished joint
- Burnished tips
- Straight tips according to DIN 5254 A

Advantage:

Hardened and wearproof tips securely hold the rings

Technical data:

- Head design: Straight
- Surface: Plain
- Material of handle: Polyvinyl chloride





ATORN Circlip pliers, angled

Application:

For mounting and removing outer retaining rings on shafts.

Execution:


- Chrome-vanadium steel
- Polished joint
- Burnished tips
- Angled tips according to DIN 5254 B

Advantage:

■ Hardened and wearproof tips securely hold the

Technical data:

- Head design: Angled 90°
- Surface: Plain
- Material of handle: Polyvinyl chloride







ATORN Circlip pliers sets

Application:

For mounting and removing inner and outer retaining rings.

Execution:

- Chrome-vanadium steel
- Polished joint
- Burnished tips

Advantage:

 Hardened and wearproof tips securely hold the rings

Delivery:

Ident. No. 010: In box with one of each: J 1, J 2, J 11, J 21, A 1, A 2, A 11, A 21


Ident. No. 020: In roll-up pouch, with 1x: J 2, J 21,



Ident. No. 030: In roll-up pouch, with 1x: J 1, J 2, J 11, J 21, A 1, A 2, A 11, A 21

Technical data:

■ Material of handle: Polyvinyl chloride



Ident. No. 010



Ident. No. 020



Ident. No. 030

Number of pieces in assortment/set (PCS)	8	4	8
Composition of set		-	1 each ATORN circlip pliers A2, A21, J2, J21	1 each ATORN circlip pliers A1, A2, A11, A21, J1, J2, J11, J21
Container		Carton	Pocket package	Pocket package
53135	Ident. No.	010 •	020 •	030 •

Prod. Gr. 5HZ

ATORN Pincers (ISO 9243)

160

500

Application:

For removing nails or for pinching wire.

Execution:

Special tool steel, oil-hardened

■ Polished head

Technical data:

510

Surface of the handle: Black atramentised



200

510

53302... Prod. Gr. 5HZ

Length (mm)



ATORN Pincers (ISO 9243)

Ident, No

Application:

For driving in and removing nails or for pinching wire.

Execution:

- Special tool steel, oil-hardened
- Polished head Length (mm)

With a striking area for driving in nails

Technical data:

180

500

■ Material of handle: Polyvinyl chloride



53304... Prod. Gr. 5HZ

ATORN Mechanic's or Rabitz nippers (ISO 9242)

Ident. No

Application:

For twisting and pinching wire or for pulling out nails.

Execution:

- Special tool steel, oil-hardened
- Blackened pliers
- Polished head

 Permanently sharp, inductively hardened precision blades

Advantage:

 Optimum cutting performance with favourable lever ratio

Technical data:

■ Material of handle: Polyvinyl chloride



Length (mm)		220	250	280
53299	ldent. No.	220 •	250 •	280 •

Prod. Gr. 5HZ

ATORN Heavy-duty end cutting nippers (ISO 5748)

with power joint

Application:

For cutting and pinching soft wire, hard wire and piano wire.

Execution:

- Flat power joint for good accessibility
- Precision cutting requires less energy
- Optimised joint geometry for even easier cutting
- Tool steel with induction-hardened cutting edges
- Ground and polished head
- Three-component handles with thumb recess and anti-slip protection
- Cutting performance for piano wire: 2.2 mm (with length 160 mm) and 2.5 mm (with length 200 mm)

Technical data:

■ Material of handle: 3-component plastic



160 200 Length (mm) Max. medium wire Ø cutting capacity (mm) 3.5 4.2 016 020 53281... Ident. No.

Prod. Gr. 5HZ

TORN Heavy-duty end cutting nippers (ISO 5748)


For cutting and pinching soft wire, hard wire and piano wire.

Execution:

- Flat power joint for good accessibility
- Precision cutting requires less energy
- Optimised joint geometry for even easier cutting
- Tool steel with induction-hardened cutting edges
- Ground and polished head
- PVC grip covers
- Cutting performance for piano wire: 2.2 mm (with length 160 mm) and 2.5 mm (with length 200 mm)

Technical data:

■ Material of handle: Polyvinyl chloride







ATORN Side cutters Swedish form

Execution:

- Swedish design
- Special tool steel, oil-hardened
- Inductively hardened blades

Advantage:

■ Ident. No. 700-730: Safe, ergonomic and fatiguefree working thanks to two-component handles

Length (mm)	Surface	Max. hard wire Ø cutting capacity (mm)	Max. medium wire Ø cutting capacity (mm)	Material of handle	53249 Ident. No.
130	Plain	1.5	2.3	Polyvinyl chloride	400 •
145	Plain	1.8	2.5	Polyvinyl chloride	510 •
165	Plain	2.0	2.8	Polyvinyl chloride	520 •
180	Plain	2.7	3.8	Polyvinyl chloride	530 •
130	Chrome plated	1.6	2	2-component plastic	700 •
140	Chrome plated	1.8	2.5	2-component plastic	710 •
165	Chrome plated	2.3	3.0	2-component plastic	720 •
180	Chrome plated	2.5	3.2	2-component plastic	730 •



Ident. No. 700-730

Prod. Gr. 5HZ

DRION[®] Side cutters

Execution:

■ Inductively hardened cutting edges

Technical data:

■ Surface: Plain

■ Material of handle: Polyvinyl chloride

Length (mm)		140	160
53251	ldent. No.	140 •	160 •



Prod. Gr. 593

ATORN Heavy-duty side cutters

with spring and power joint

Application:

For easy cutting of piano wires.

- Power joint with up to 20% less effort
- with opening spring for optimal handling (simple to
- special tool steel, oil-hardened
- Inductively hardened blades
- Three-component handles with thumb recess and anti-slip protection

Advantage:

- Excellent cutting performance with low force required thanks to optimal leverage
- for heavy-duty long-term use

Technical data:

- Surface: Chrome plated
- Material of handle: 2-component plastic



Ident. No. 018

Length (mm)		160	180	200
Max. medium wire Ø cutting capacity (mm)		3.5	3.8	4.2
53255	Ident. No.	016 •	018 •	020 •

Prod. Gr. 5HZ

Heavy-duty side cutters

With optimised power joint

Application:

for easy cutting of wires and cables.


Execution:


- power joint with up to 20% power saving
- with opening spring for optimal handling (simple to disassemble)
- special tool steel, oil-hardened
- inductively hardened blades

Advantage:

- safe, ergonomic and effortless work thanks to 2-component handles
- excellent cutting performance with low force required thanks to optimal leverage
- for heavy-duty long-term use

- Surface: Chrome plated
- Material of handle: 2-component plastic







Ident. No. 018

ATORN Heavy-duty side cutters

Execution:

- Special tool steel, oil-hardened
- Inductively hardened blades

Advantage:

• Excellent cutting rate with low force required thanks to optimal lever transmission

■ For heavy-duty long-term use

Technical data:

- Surface: Plain
- Material of handle: Polyvinyl chloride



Length (mm)		160	180	200
Max. hard wire Ø cutting capacity (mm)		2.5	2.7	3.0
Max. medium wire Ø cutting capacity (mm)		3.5	3.8	4.2
53254	ldent. No.	510 ●	520 ●	530 •

Prod. Gr. 5HZ

ATORN Lever side cutters and lever end cutting nippers

Application:

For easy cutting of hard wires.

■ Special steel head, polished

■ With opening spring

Advantage:

- Up to 40% less force required due to lever ratio
- One-handed operation with integrated spring and

Length (mm)		160	160	
Surface		Plain	-	
Max. medium wire Ø cutting capacity (mm)		2.2	2.4	
Material of handle		Polyvinyl chloride	Polyvinyl chloride	
53096	ldent. No.	005	010	
33090	ident. No.	•	•	

Prod. Gr. 5HZ



Ident. No. 010

Plastic side cutters (ISO 5743)

with spring

Application:

For flush and smooth cutting of plastic parts (e.g. sprues) and other soft materials

Execution:

- Sharp cutting edges without external chamfer for flush cuts
- With opening spring for comfortable working (also removable)
- Finely polished surface
- Three-component handles with thumb recess and anti-slip protection

Technical data:

- Length: 160 mm
- Surface: Plain
- Material of handle: 3-component plastic



53097	Ident. No.	005 •

Prod. Gr. 5HZ

ATORN Small bolt cutter high-ratio

- · Compact centre cutter with extremely high transmission thanks to laterally offset rotary axis.
- The required cutting force is reduced by 25%
- Pulling cut prevents the material from slipping out
- Can be reset for additional force reduction and easy cutting of hard and thick wires
- Clamping area on the back for pulling e.g. fence wires

Technical data:

- Length: 190 mm
- Max. piano wire diameter cutting capacity: 3.0 mm
- Max. soft wire diameter cutting capacity: 4.4 mm
- Surface: Black atramentised

Material of handle		PA - Polyamide	3-component plastic
53096	ldent. No.	400	410
555,5	10011111101	•	•





Ident. No. 400



Ident. No. 410

ATORN Heavy-duty bolt cutters

ergonomically angled

Application:

for effortless cutting of wires

Execution:

- optimised arm position for easy gripping
- integrated heavy-duty rivets for maximum load
- patented joint geometry ensures extremely easy and power-saving cutting of even hard wires

■ with opening spring and lock

Technical data:

- Length: 210 mm
- Max. piano wire diameter cutting capacity: 3.6 mm
- Max. soft wire diameter cutting capacity: 5.2 mm
- Surface: Lacquered
- Head design: Angled 20°



Ident. No. 300



Material of handle		Polyvinyl chloride	2-component plastic
52006	ldent. No.	300	310
33090	ident. No.	•	•

Prod. Gr. 5HZ

ATORN Pocket bolt cutters and bolt cutters

With lever transmission

Application:

Ident. No. 046-090: For cutting steel wires up to max. 44 HRC

Execution:

- Ident. No. 025:
- With opening spring and fastening
- Comfort grip cover with slip guard
- Lightweight and handy with enormous cutting capacity

■ Ident No 046-090

- Interchangeable face mill
- Forged, robust blades with additional inductively hardened cutting edges, cutting hardness approx. 62 HRC
- Powerful elbow joint and impact-resistant, powder-coated steel tube handle
- ERGO grip sleeves make them comfortable to
- Easy adjustment using double eccentric screws



Ident No 046-090

Length (mm)		250	460	620	780	900
Max. piano wire Ø cutting capacity (mm)		3	5	7	8	9
Max. soft wire Ø cutting capacity (mm)		5	8	9	11	13
Surface		Burnished	-	-	-	-
Material of handle		1-component plastic	-	-	-	-
53230	ldent. No.	025 •	046 •	062 •	078 •	090 •

Prod. Gr. 5HZ

Cable cutters **ATORN**

For cutting single and multi-conductor copper and aluminium cables.

Execution:

- Hardened, precision-ground blades
- Polished head
- Narrow, riveted joint

Not suitable for steel wire and hard-drawn copper

Advantage:

■ Safe, ergonomic and fatigue-free working thanks to two-component handles

Technical data:

Material of handle: 2-component plastic

Length (mm)		160	210
Max. medium wire Ø cutting capacity (mm)		10	12
53093	Ident. No.	310	320
55095	ident. No.	•	•

Prod. Gr. 5HZ



ATORN Cable and electrician's scissors

Application:

For cutting finely stranded copper conductors

Execution:

- INOX stainless steel cutting blades
- With notch for stripping insulation
- Toothed cutting edge prevents the cable from slipping out when cutting
- Cutting edge hardness of 56 HRC.
- Ergonomic 2-component handles

- Length: 140 mm
- Max. medium wire diameter cutting capacity: 16
- Material of handle: 2-component plastic

1	52002	Ident No	500
ı	33073	ldent. No.	•





ATORN Cable cutters

Application:

For cutting single or multi-wire copper or aluminium conductors

Execution:


- INOX stainless steel blades
- Self-opening through internal spring
- Sharp cut no crushing or deformation of conductors
- Ergonomically shaped plastic handles
- Hardened and precision-ground

Technical data:

Material of handle: Plastic

Length (mm)		134	168
Max. medium wire Ø cutting capacity (mm)		6	10
53093	Ident. No.	600 ●	610 •

Prod. Gr. 5HZ



ATORN Ratchet cable cutters

One-handed operation

Application:

For cutting multi-strand copper and aluminium cables

Execution:

- Excellent lever transmission and step-by-step cutting for optimal power transmission
- Simple one-hand operation
- Copper up to 600 MCM/300 mm², aluminium up to 750 MCM/380 mm²
- Can be unlocked in each cutting position
- All parts are made of high-strength steel, black oxide surface

Advantage:

- Excellent handling of cables with diameters from 6 mm to 34 mm, as the total tool length is only
- The ergonomically shaped, soft multi-component handle ensures optimal power transmission

Technical data:

- Length: 260 mm
- Max. medium wire diameter cutting capacity: 34 mm
- Surface: Burnished
- Material of handle: 2-component plastic



	53	093
--	----	-----

Ident. No.

700

Prod. Gr. 5HZ

ATORN Precision electronics ESD side cutters




Execution:

- glossy polished steel surface: proven and reliable finish.
- no risk to circuitry or components due to chrome flaking off
- ESD-compatible 2-component handles with wide and non-slip contact surface
- inductively hardened blades facilitate easy and sharp cutting with maximum service life
- inserted double leaf springs and wear-resistance guarantee uniform action
- box joint design for optimal maintenance-free guidance of jaws -
- silky-smooth action, long service life, blade overlap prevented.

- Surface: Plain
- Material of handle: 2-component plastic



Ident. No. 010





ESD precision electronics angled and pointed cutters



- angle cutting pliers ideal for horizontal and vertical
- Glossy polished steel surface: proven and reliable finish.
- no risk to circuitry or components due to flaking off of chrome
- ESD-compatible 2-component handles with wide and non-slip contact surface
- inductively hardened blades facilitate easy and sharp cutting with maximum service life
- double leaf springs inserted and wear-resistant guarantee uniform action
- Box joint design for optimal maintenance-free guidance of jaws - silky-smooth action and long service life, overlapping of blades avoided.

Technical data:

- Length: 120 mm
- Max. soft wire diameter cutting capacity: 1.2
- Head design: Straight | With small grind
- Surface: Plain
- Material of handle: 2-component plastic

53028	Ident. No.	080 •



ATORN ESD precision electronics long-nose, flat and round-nose pliers



Execution:

- glossy polished steel surface: proven and reliable
- no risk to circuitry or components due to chrome flaking off
- ESD-compatible 2-component handles with wide and non-slip contact surface
- box joint design for optimal maintenance-free guidance of jaws -

Ident. No. 100

- silky-smooth action and long service life.
- inserted double leaf springs and wear-resistance guarantee uniform action
- Ident. No. 100: pointed pliers with straight, short and smooth jaws
- Ident. No. 110: pointed pliers with curved, short and smooth jaws
- Ident. No. 120: flat nose pliers with short and smooth iaws
- Ident. No. 130: Round-nose pliers with short and smooth jaws
- Ident. No. 140: pointed pliers with long, straight jaws with cut

Technical data:

- Surface: Plain
- Material of handle: 2-component plastic



Length (mm)		130	130	130	130	155
Jaw design		Flat, round Smooth	Flat, pointed Smooth	Flat, wide Smooth	Round Smooth	Flat, pointed Fine grooves
53028	ldent. No.	100	110	120	130	140

Prod. Gr. 5HZ

ATORN Electronics gripping pliers

Application:

Ident. No. 010, 030-040: For highly precise assembly tasks in electronics and precision mechanics fields.

Ident. No. 020: For bending grommets with different radii for wire-shaped materials.

Execution:

C-45 steel, 44-48 HRC arm hardness

Advantage:

Ident, No. 110

- Anti-glare, phosphatised surface enables safe
- With low-friction double-opening spring and two-component handles for fatigue-free, ergonomic working

Technical data:

- Length: 125 mm
- Surface: Phosphated
- Material of handle: 2-component plastic



Ident. No. 020

Head design		Flat	Round	Pointed head	Pointed head Straight
53027	Ident. No.	010	020	030	040
33027	ident. No.	•	•	•	•

ATORN Electronics cutters

Execution:

- C-60 steel, blade hardness from 63-65 HRC
- Inductively hardened blades
- Largest cuttable diameter (copper): 0.2-2 mm

Advantage:

- Anti-glare, phosphatised surface enables safe working
- With low-friction double-opening spring and two-component handles for fatigue-free, ergonomic working

Technical data:

- Length: 112 mm
- Max. soft wire diameter cutting capacity: 1.3 mm
- Surface: Phosphated
- Material of handle: 2-component plastic



Ident. No. 110

Head design		With grind	With grind and wire clamp	No grind	Wire clamp
52027	Ident No	100	110	120	130
53027	ldent. No.	•	•	•	•

Prod. Gr. 5HZ

ATORN

Electronics pliers and cutter set

in textile bag

Application:

For cutting, holding and gripping.

Execution:

- C-45/C-60 steel
- Consisting of: Flat-nose pliers, round-nose pliers, pointed pliers (straight and bent), side-cutters with and without bevel

Advantage:

- Anti-glare, phosphatised surface enables safe working
- \blacksquare With low-friction double-opening spring and two-component handles for fatigue-free, ergonomic working

Delivery:

Set in zipped case

Number of pieces in assortment/set	6		
Composition of set		1 flat-nose pliers 125mm 1 round-nose pliers 125 mm 1 needlenose pliers 125 mm, bent by 30° 1 needlenose pliers 125 mm, straight 1 side cutters 112 mm, with bevel 1 side cutters 112 mm, without bevel	
Surface		Phosphated	
Material	Tool steel		
53027 Ident. No.		300 ●	



Prod. Gr. 5HZ

ATORN

Pincers

special steel

Execution:

- Universal tweezers for many areas of application
- Hardened tips

■ Sharp, smooth and strong

- Surface: Nickel plated
- Material: Tool steel







Ident. No. 640

Ident. No. 650

Length (mm)	Tweezer design		0.
110	Short tip	610	•
120	Swiss pattern	620	•
120	Pinpoint	630	•
130	Strong tip	640	•
130	Fine, long tip	650	•

Prod. Gr. 5HP



Execution:

Technical data:

■ Surface: Nickel plated

■ Material: Tool steel



Ident. No. 710



Ident. No. 720



Length (mm) Tweezer design 53002... Ident. No. 120 Rounded tip 710 Rounded tip, grooves on end of gripper 720 160 Rounded tip, grooves on end of gripper 730 180 Rounded tip, grooves on end of gripper 740

Prod. Gr. 5HP

ATORN Pincers, antimagnetic

special steel

Execution: Advantage: Technical data: ■ Rustproof ■ Non-magnetic ■ Surface: Plain Fine matt-polished, anti-glare ■ Material: Tool steel Ident. No. 820 Ident. No. 830 Ident. No. 810 Ident. No. 860 Ident. No. 840 Ident. No. 850

Tweezer design		
Iden		No.
Fine tip	810	•
Fine tip	820	•
Strong, fine tip		•
Laterally straight, super-fine tip		•
Laterally curved, super-fine tip 850		•
Strong, flat, rounded tip	860	•
Fine, straight tip 8		•
Angled, fine, extra-strong tip	880	•
	Fine tip Fine tip Strong, fine tip Laterally straight, super-fine tip Laterally curved, super-fine tip Strong, flat, rounded tip Fine, straight tip	Ident.

Ident. No. 880

Prod. Gr. 5HP



Pincers set, 8 pieces

special steel

Ident. No. 870

Execution:

- Rustproof
- Fine matt-polished, anti-glare
- Set comprising no. 53002 810-880

Advantage:

■ Non-magnetic

Delivery:

In plastic case


- Surface: Plain
- Material: Tungsten carbide
- Number of pieces in assortment/ set: 8



Prod. Gr. 5HP





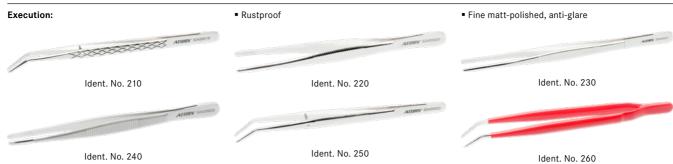

Length (mm)	Tweezer design	Surface	Material	53003 Ident. No.
155	Angled, serrated tip	Nickel plated	Tool steel	210
145	Straight Rounded tip Toothed	Nickel plated	Tool steel	220
200	Straight Rounded tip Toothed	Nickel plated	Tool steel	230
145	Straight Rounded tip Toothed	Plain	Special stainless steel	240
155	Angled, serrated, pointed curved tip	Nickel plated	Tool steel	250
155	Angled, serrated, pointed curved tip I Serrated gripping surfaces	Coated	Tool steel	260 •

Prod. Gr. 5HP

ATORN Extra long gripping pincers


■ Steel tweezers, surface bright nickel-plated

■ Butt round tips with teeth for perfect grip

■ Heavy and robust

■ Tweezer design: Blunt | Round tip

■ Surface: Nickel plated



Prod. Gr. 5HP

TORN Gripping and fitting pincers

made of stainless steel or plastic



Length (mm)	Tweezer design	Surface	Material	53003 Ident. No.
145	Flat, wide jaws	Plain	Stainless steel	510
145	Flat, wide jaws Curved jaws	Plain	Stainless steel	520 ●
145	Flat, wide jaws Soft coating	Plain	Stainless steel	530
120	Pointed jaws	Plain	Titan	610
145	Round, straight, finely serrated tip	Lacquered	Stainless steel	620
120	Flat, wide jaws Straight	_	Plastic	630



Execution:

■ Special steel, rustproof

Advantage:

With magnifying glass (30-mm diameter) 3-4x magnification

Technical data:

■ Length: 110 mm

■ Tweezer design: Pointed head

Surface: PlainMaterial: Tool steel



Delivery:

in case

53003	Ident. No.	410 •
-------	------------	----------

Prod. Gr. 5HP

ATORN SMD pincers with ESD coating



Application:

Work on energised components



■ Precision tweezers , non-magnetic with ESD



Made from rust-proof steel, resistant to acid



Ident. No. 210



Ident. No. 220



Ident. No. 230



Ident. No. 240



Ident. No. 250



Ident. No. 260

Tweezer design		4
	Ident. No.	
Pointed jaws		•
Short tip		•
Pointed jaws Curved jaws	230	•
Narrow head Pointed jaws	240	•
Curved tip Serrated gripping surfaces	250	•
Wide jaws Blunt Serrated gripping surfaces	260	•
	Pointed jaws Short tip Pointed jaws Curved jaws Narrow head Pointed jaws Curved tip Serrated gripping surfaces	Ident. Pointed jaws 210 Short tip 220 Pointed jaws Curved jaws 230 Narrow head Pointed jaws 240 Curved tip Serrated gripping surfaces 250

Prod. Gr. 5HP

ATORN SMD pincers set of 3 pieces with ESD coating



Application:

Work on energised components

Execution:

Precision tweezers, non-magnetic with ESD coating

■ Made from rust-proof steel, resistant to acid

- Number of pieces in assortment/set: 3 PCS
- ESD-capable: Yes









stainless steel

Execution:

- Stainless steel
- For diameters from 2.5-5 mm







Material: Stainless steel



Technical data:

Ident	. No. 440)	
100			

Suitable for		Vertical components	Horizontal components	Diagonally positioned components
53003 Ident. No.		420	430	440
55005	Ident. No.	•	•	•

Prod. Gr. 5HP

ATORN Pincers sets, 5 or 10 pieces

stainless steel

Execution:

- Ident. No. 700: Set consisting of 5 pieces, in tweezers pouch, equipped with electronic tweezers no. 53003 420-520
- Ident. No. 710:
- 10-piece set in tweezers pouch, fitted with:
- 2 pairs of precision tweezers, 130 and 105 mm long, fine and very fine tips
- 1 pair of pointed tweezers, hardened, 145 mm
- 1 pair of gripping tweezers with rounded grip ends, 145 mm long
- 1 pair of assembly tweezers, angled, 155 mm
- 1 pair of electronics tweezers no. 53003 420-520


Technical data:

- Surface: Plain
- Material: Stainless steel

Number of pieces in assortment	:/set (PCS)	5	10
53003	Ident. No.	700 ●	710 •

Prod. Gr. 5HP





ATORN Insulated pincers, PVC-coated stainless steel

Application:

For precise gripping of very small live parts.

Execution:

■ Insulated version

Technical data:

- Surface: Plastic-coated
- Material: Stainless steel





155



Ident. No. 810

Ident. No. 820

130 145 Straight, blunt, wide, finely serrated Curved, narrow, finely serrated tip Straight tip tip 810 830 820

53003... Prod. Gr. 5HP

Length (mm)

Tweezer design

Ident. No.

ATORN Cross pincers special steel

Application:

For precise gripping and automatic holding of the smallest parts.

Execution:

- Special steel, nickel-plated
- With hand guard, particularly suitable for soldering

Advantage:

Cross-over tweezers, self-locking

Technical data:

- Surface: Nickel plated
- Material: Tool steel

Length (mm)		160	155
Tweezer design		Angled tip	Straight, flat tip
53003	ldent. No.	310 •	320 •



Prod. Gr. 5HP

ATORN Triple-use pliers

Combination snipe nose pliers - wire-stripping pliers - wire crimpers

For cutting, bending, stripping and crimping cable connectors and for bending lugs.

Execution:

Length (mm)

Head design

Surface Material of handle

■ Tool steel, tempered

■ Inductively hardened blades

Advantage:

■ Safe, ergonomic and fatigue-free working thanks to two-component handles with hand guard





Ident No 700

53586... Prod. Gr. 5HZ



ATORN Wire stripping pliers

Ident. No.


with spiral spring

Execution:

- Special tool steel, oil-hardened
- With coiled opening spring
- With adjusting screw and locking nut

Advantage:

Safe, ergonomic and fatigue-free working thanks to two-component handles with hand guard





Prod. Gr. 5HZ

ATORN Working and electrician's knifes

Application:

Ident. No. 010: For universal cutting of a wide range of materials

Ident. No. 020: For cutting and stripping PVC cables.

Execution:

- Non-slip
- Ident. No. 010:
- Rustproof blade with serrated edge
- Blue plastic grips
- Blade is locked via pushbutton
- Ident. No. 010, 030: Blade stopper
- Ident. No. 020:
- Rustproof blade with two stripping notches
- Red plastic grips
- Blade with lock
- Ident. No. 030:
- Stainless, smooth blade
- Black plastic recessed handles











Ident. No. 030

Length (mm) 190 191 189 010 020 030 53603... Ident No

Ident. No. 020

Prod. Gr. 5HZ



Cable knives

fixed blade

Application:	with stainless steel blade
Length (mm)	190

Length (mm)		190	
Material of handle		Wood	
53610 Ident. No.		010 •	



Prod. Gr. 598



DRION Folding cable knives

Wooden or plastic handle

Application:

Ident. No. 005-007: For cutting cables.

Ident. No. 010: For cutting and stripping cables.

Execution:

- Ident. No. 005, 010: Foldable
- Ident. No. 007:



■ FSC beech wood handle

• Ident. No. 010: Blade with double scraper



Ref. no. 005



Ref. no. 007



Ref. no. 010

Length (mm)		191	200	185
Material of handle		Wood	Beechwood	Plastic
53615	ldent. No.	005	007	010
55015	ident. No.	•	•	•

53615 007 = Prod. Gr. 580 53615 005 = Prod. Gr. 598 53615 010 = Prod. Gr. 598

ORION® Cable knives

with blade and awl

Application:	
For cutting cables and poking holes.	

Length (mm)		170	
Material of handle		Wood	
53617	ldent. No.	010	
33017	ident. No.	•	

Execution:

■ Two-piece



Prod. Gr. 598

ORION Cable knives

4 pieces

Application:


For cutting and stripping cables and poking holes.

Execution:

■ Large and small blade

	Screwdriver
ning applies and naking halos	■ Axad

- With brass inlay





53619... Prod. Gr. 598

Length (mm) Material of handle

DRIDNCable knives

Ident. No. 010–026: For stripping sheathing from all common types of round cables, including waterproof cables.

- Ident. No. 010-026: Cutting depth is adjusted using the adjusting screw on the end of the handle
- Ident. No. 022: For ribbon cables and flat cables
- Ident. No. 026: Optimum safety through retractable hooked blade

■ Ident. No. 028: For fine-strand and solid conductors with PVC insulation. Also with stripping station in housing for 0.5-6 mm2

Advantage:

■ Ident. No. 010-026: The rotating inner blade automatically adjusts to the long cut after the round cut



Ident. No. 010-020



Ref. no. 022



Ref. no. 024



Ref. no. 026



Ref. no. 028

Design		No pre-cutter	No pre-cutter	Hook blade	Straight blade	Hook blade	With spring
Length (mm)		140	140	185	185	145	145
Min./max. cable Ø		4-16 mm	8-28 mm	4-28 mm	4-28 mm	4-28 mm	4-28 mm
Material of handle		2-component plastic	2-component plastic	2-component plastic	2-component plastic	1-component plastic	1-component plastic
53631	ldent. No.	010	020	022	024	026	028

Prod. Gr. 598

DRION Wire-stripping tools

Application:

Ident. No. 020: For stripping conductor cross-sections 0.5-6 mm²

Ident. No. 030: For stripping and crimping conductor cross-sections 0.5-6 mm

Execution:

■ Fully insulated

- With side-cutter up to 6 mm²
- Ident. No. 030: Pressing range for crimping: 0.5-2.5 and 4.0-6.0 mm²

Advantage:

- With integrated length scale from 8-20 mm
- With automatic gauging system; adjusts to suit the conductor cross-section

Model		Mini-Duo	Duo-Crimp
Length (mm)		160	160
Min./max. stripper size		0.5-6 mm ²	0.5-6 mm ²
Material of handle		Plastic	Plastic
53592	Ident. No.	020 •	030 •

Prod. Gr. 598



Ref no 020



Ref. no. 030

TRIDN Coax, round cable stripping tool and data cable stripper

Application:

Ident. No. 050: Stripping of all common coaxial cables in just 2 steps.

Ident. No. 060: For round and wet room cabling, facilitates flush stripping including in hard-to-reach

Ident. No. 070: For stripping data lines and stranded wires.

Ident. No. 080: removes coating from round cables,

strips insulation and cuts them

Execution:

- Ident. No. 050: Adjustment of cutting depth not necessary. Length 110 mm. For cables from
- Ident. No. 060: Adjustment of cutting depth not necessary. Length 120 mm. For cables from 8-13
- Ident. No. 070: Adjustable inner blade and side cutter. For cables from 4-10 mm and stranded wires from 0.2-0.8 mm
- Ident. No. 080:
- round cut, longitudinal cut, stripping, cutting all with one tool
- hooked blade can be locked in any position
- multi-functional with optimised cable routing



Ref. no. 060

Ref. no. 070

Min./max. stripper size		-	-	-	6-0.5 mm ²
Min./max. cable Ø		4.8-7.5 mm	8-13 mm	4-10 mm	8-13 mm
Material of handle		1-component plastic	1-component plastic	2-component plastic	1-component plastic
53592	ldent. No.	050	060	070	080
33372	ident. No.	•	•	•	•

Prod. Gr. 598

ATORN Automatic wire-stripping pliers

Application:

For automatic stripping of conductors with PVC insulation.

Execution:

With cable cutter and length stop

With three-stage insulation thickness setting

Advantage:

■ The blades automatically adjust to the conductor cross-section

Length (mm)		200
Min./max. stripper size		0.08-6 mm ²
Material of handle		Plastic
53585	ldent. No.	010 •

Prod. Gr. 5HZ



ATORN Wire-stripping tool, automatic with quick adjustment

Application:

For stripping solid and fine-wire conductors

- Intelligent self-adjustment for all cross-sectional
- Length positioner for adjustable stripping length from 3 to 21 mm
- Solid conductors up to 6 mm², fine wires up to 16 mm
- Cutting function with integrated hand protection
- Stripping knife can be replaced quickly and without tools
- Extremely durable thanks to fibreglass-reinforced polyamide
- No damage or splaying of conductors

Length (mm)		202
Min./max. stripper size		0.03-16 mm ²
Material of handle		2-component plastic
53581	ldent. No.	010 •



ATORN Pliers for wire end ferrules

Execution:

■ polished head



Ident. No. 001

Advantage:

• Marked semi-circular sections for reliable connection between sheath and conductor



Ident. No. 003

■ Ident. No. 003-004: Safe, ergonomic and fatigue-free working thanks to two-component



Ident. No. 004

Length (mm)			145	180
Suitable for min./max. Ø		0.25-2.5 mm	0.25-2.5 mm	0.25-16 mm
Material of handle		Polyvinyl chloride	2-component plastic	2-component plastic
53145	ldent. No.	001	003	004
53 145	ident. No.	•	•	•

Prod. Gr. 5HZ

Wire end ferrule assortment **ATORN**

- With wire end ferrule pliers, 0.5-4 mm²
- With voltage tester
- 100x wire end ferrules 0.5/0.75/1.5/2.5 mm² and 50x 4 mm²

- Number of pieces in assortment/set: 7
- Composition of set: Set consisting of: Crimping pliers 0.5-4 mm2; voltage tester; 100 each wire end ferrules 0.5/0.75/1.5/2.5 mm² and 50 each wire end ferrules 4 mm2

53125 Ident. No. 010			
	53125	Ident. No.	010



Prod. Gr. 5HZ

ATORN Crimping pliers

Application:

Ident. No. 010: For crimping insulated and uninsulated wire end ferrules

Ident. No. 020: For crimping wire end ferrules with and without insulation.

Ident. No. 100: for crimping insulated cable lugs



Execution:

- Lever system with unlockable force stop function
- Adjustable crimping pressure
- Ident. No. 010-020: Trapezoidal crimping
- Ident. No. 100: Crimp die with 1.0/2.5/6.0 mm²





Ident. No. 100



Ident. No. 010





Ident. No. 020



Advantage:

Length (mm)		205	205	245
Suitable for min./max. Ø		0.5-6 mm	6-16 mm	1.0-6 mm
53508	ldent. No.	010	020	100
55506	ident. No.	•	•	•

Prod. Gr. 5HZ

ATORN Crimping set

with interchangeable press inserts

Application:

Set of 5 pairs of interchangeable hardened crimp dies

Execution:

- Fast, safe, tool-free replacement using springloaded locking pins
- Insert for wire end ferrules: In accordance with DIN 46288 T.1 and T.4 from 0.5 to 6.0 mm², with and without plastic collar
- Insert for wire end ferrules: In accordance with DIN 46288 T.1 and T.4 from 6.0 to 16.0 mm², with and without plastic collar
- Insert for insulated connectors: In accordance with DIN 60352 T.2 from 0.5 to 6.0 mm²
- Insert for flat plug-in sleeves and flat plugs: In accordance with DIN 60352 T.2 from 0.5 to
- Insert for insulated connectors: In accordance with DIN 60352 T.2 from 0.75 to 10.0 mm²
- Lever system with unlockable force stop function ensures DIN-compliant, secure crimping

- Adjustable crimping pressure
- Ergonomically shaped plastic handles for effortless work

Delivery:

In robust case with foam insert

Technical data:

- Number of pieces in assortment/set: 6 PCS
- Composition of set: Crimping pliers
- Wire end ferrules with and without plastic collars in accordance with DIN 46288 T.1 and T.4 from 0.5 mm² to 6.0 mm²
- Insulated connectors in accordance with DIN 60352 T.2 from 0.5 mm2 to 6.0 mm2
- Male and female blade connectors in accordance with DIN 60352 T.2 from 0.5 mm2 to 6.0 mm2
- Wire end ferrules with and without plastic collars in accordance with DIN 46288 T.1 and T.4 from 6.0 mm2 to 16.0 mm2
- Non-insulated connectors in accordance with DIN 60352 T.2 from 0.75 mm2 to 10.0 mm2



53508	ldent. No.	200 •
-------	------------	----------

Prod. Gr. 5HZ

ATORN

Precision crimping tool with positioner and hexagonal pressing 0.08 to 16 mm²

with automatic cross-section adjustment

Application:

For processing wire end ferrules with and without insulating collar

Execution:

- Very large application range from 0.08 to 16 mm² without adjustment
- Low manual force 30% reduction compared to older tools
- Swivel positioner (locator) for secure positioning with small cross-sections
- Even six-edge precision crimping over the full length of the sleeve

- Unlockable force stop function for securing the entire crimping process
- Ergonomic soft-grip handles, narrow gripping
- Made entirely of high-strength steel, highly stressed parts are specially annealed

Technical data:

- Length: 213 mm
- Suitable for min./max. diameter: 0.08-16 mm
- Material of handle: 2-component plastic



52112	Ident. No.	200
55 1 15	ident. No.	•

Prod. Gr. 5HZ

ATORN Crimping pliers with rotating crimping insert

For wire end ferrules

Application:

For processing wire end ferrules with and without insulating collars

Execution:

- 360° rotation for interchangeable crimping inserts
- Insert the wire end ferrule from the front or from the side
- · Crimping area can be adjusted in intervals with 45° locking mechanism
- Integrated, releasable latching mechanism ensures complete crimping
- Highly heat-treated steel with a black oxide
- Square or trapezoidal crimping possible thanks to interchangeable inserts

 Automatically adjusts to the conductor cross-section

Advantage:

- Wide range of applications from 0.08 to 16 mm²/ twin sleeves from 2 x 0.25 to 2 x 10 mm²
- Small and handy can be used with minimal manual force, even in hard-to-reach places

Delivery:

Crimping insert not included - please order separately

Technical data:

- Length: 180 mm
- Suitable for min./max. diameter: 0.08-16 mm
- Material of handle: 2-component plastic



210 53113... Ident. No Prod. Gr. 5H7

Accessories for		53113 210
53113 Square crimping insert For wire end ferrule pliers	Ident. No.	211 •
53113 Trapezoidal crimping insert For wire end ferrule pliers	Ident. No.	212 •

ATORN Crimping pliers for inserting interchangeable crimping inserts from the front or side

For wire end ferrules and cable lugs

Application:

For processing wire end ferrules and cable lugs with and without insulation

Execution:

- Unlockable latching mechanism ensures complete and high-quality crimping
- Precision-manufactured with optimal crimping force preset at the factory
- Ergonomically designed soft handles with slip guard
- · Highly heat-treated steel with a black oxide surface
- Ident. No. 220: For inserting interchangeable crimping inserts from the front (tool-free)

• Ident. No. 230: For inserting interchangeable crimping inserts from the side (tool-free)

Advantage:

 Versatile application thanks to interchangeable dies

Delivery:

Crimping insert not included - please order separately

Technical data:

- Suitable for min./max. diameter: 0.14-10 mm
- Material of handle: 2-component plastic



Ident. No. 220



Ident. No. 230





Length (mm) 220 210 220 230 53113... Ident No •

Prod. Gr. 5HZ

Accessories for		53113 220	53113 230
53113 Crimping insert set for insulated DIN cable lugs In pairs, for 0.5 to 6 mm ²	ldent. No.	221 •	221 •
53113 Crimping insert set for uninsulated DIN cable lugs In pairs, for 0.1 to 10 mm ²	ldent. No.	222 •	222
53113 Crimping insert set for uninsulated and insulated wire end ferrules In pairs, for 0.14 to 10 mm ²	Ident. No.	223	223

ATORN Interchangeable crimping inserts for square or hexagonal crimping

for wire end ferrule pliers

Application:

Ident. No. 211: For processing wire end ferrules with and without insulating collars, square crimping Ident. No. 212: For processing wire end ferrules with and without insulating collars, trapezoidal crimping

Execution:

53113...

Prod. Gr. 5HZ

- Tool-free interchangeable crimping insert, 360° rotation
- High-strength, specially heat-treated steel

- Ident. No. 211: Square crimping of 0.08-16 mm²
- Ident. No. 212: Trapezoidal crimping of 0.08-16 mm³

Advantage:

 Precision crimping over the full length of the ferrule

Technical data:

Ident. No.

■ Suitable for min./max. diameter: 0.08-16 mm

212



Ident. No. 211



ATORN Interchangeable crimping insert sets for cable lugs and wire end ferrules Suitable for ATORN crimping pliers

Application:

Suitable for crimping pliers with accommodation for interchangeable inserts

Execution:

Ident. No. 221:

- For processing red/blue/yellow insulated DIN cable lugs
- Pin-type cable lugs, male blade, female blade, male bullet, female bullet, butt and parallel connectors
- With 3 profiles P 1: red 0.5-1.0 mm²/P 2: blue 1.5-2.5 mm²/P 3: 4.0-6.0 mm²

■ Ident. No. 222:

- For processing uninsulated cable lugs
- Eyelet and pin-type cable lugs and connectors without insulation and "miniature" cable lugs
- With 4 profiles P 1: 0.1-0.5 mm2/P 2: 0.5-2.5 mm²/P 3: 4.0-6.0 mm²/P 4: 10 mm²
- Ident. No. 223:

- For processing insulated and uninsulated wire end ferrules
- · With and without insulating collars in accordance with DIN 46228
- With 6 profiles P 1: 0.14-0.75 mm²/P 2: 1.0-1.5 mm^2/P 3: 2.5 mm^2/P 4: 4.0 mm^2/P 5: 6.0 mm^2/P 6: 10.0 mm²

Advantage:

 Precision crimping over the full length of the ferrule







Ident. No. 222



Ident. No. 223

Suitable for min./max. Ø		0.5-6 mm	0.1-10 mm	0.14-10 mm
52112	Ident. No.	221	222	223
53113	ident. No.	•	•	•

Prod. Gr. 5HZ

TRION Crimping pliers

Basic and self-grip crimping pliers

Application:

Ident. No. 505: For crimping non-insulated flat connectors and insulated cable lugs, for cutting and stripping cables.

Ident. No. 515: For crimping uninsulated cable lugs, stripping insulation and cutting.

Execution:

- Special steel, burnished
- With screw cutter for M2.6 to M5

- Stripping device for conductor cross-sections of 0.75-6.0 mm²
- Crimping of cable lugs 0.5-1/1.5-2.5/4-6 mm²
- Ident. No. 505: Plastic handles, yellow
- Ident. No. 515: Plastic handles, blue

Technical data:

- Suitable for min./max. diameter: 0.5-6 mm
- Material of handle: Plastic

12. O. 1	ABISOLIERUNG	

Ref. no. 505



Ref. no. 515

53505 Ident. No. 505 515	Length (mm)		240	225
	53505	ldent. No.		515 •

Prod. Gr. 580

ATORN VDE combination pliers

Application:

For gripping, holding and cutting.

Execution:

- Tempered tool steel for hard and soft wire
- Serrated gripping surfaces, inductively hardened blades
- VDE type according to DIN EN 60900

Advantage:

 Safe, ergonomic and fatigue-free working thanks to two-component handles with hand guard

Technical data:

- Surface: Chrome plated
- VDE certified: Yes
- Material of handle: 2-component plastic
- Max. medium wire diameter cutting capacity: 1.6 mm



Length (mm)		160	180	200
53232	Ident. No.	910 •	920 •	930 •

Prod. Gr. 5HZ

ATORN VDE plier sets

Execution:

- Serrated gripping surfaces, inductively hardened blades
- VDE combination pliers, 180 mm, 2-component handles, chrome-plated head
- VDE side-cutters, 160 mm, 2-component handles, chrome-plated head
- VDE wire-stripping pliers, 160 mm, for 0.5 to 6 mm², 2-component handles, chrome-plated head
- Ident. No. 965: VDE snipe nose pliers, straight, 200 mm, 2-component handles, chrome-plated head

■ Ident. No. 970:

- VDE snipe nose pliers, straight, 160 mm,
 2-component handles, chrome-plated head
- VDE snipe nose pliers, curved, 160 mm,
 2-component handles, chrome-plated head

Delivery:


Ident. No. 965: In robust plastic case Ident. No. 970: in robust plastic case

Technical data:

■ VDE certified: Yes



Ident. No. 965





Ident. No. 970

ATORN VDE heavy-duty combination pliers

Application:

No. 53232: for gripping, holding and cutting. No. 53236: For gripping, holding and cutting.

Execution:

- VDE type according to DIN EN 60900
- No. 53232:
- power joint with up to 30% power saving
- secure retention of workpieces with 4-point involute burner hole
- special tool steel for hard and soft wire
- serrated gripping surfaces, inductively hardened blades
- No. 53236:
- For hard and soft and piano wire

- Serrated gripping surfaces
- Inductively hardened blades
- Tempered tool steel

Advantage:

- No. 53232: safe, ergonomic and effortless work thanks to 2-component handles with slip guard
- No. 53236: 35% less force required when cutting niano wire

Technical data:

- Surface: Chrome plated
- VDE certified: Yes
- Material of handle: 2-component plastic



No. 53232



No. 53236

Length (mm)		200	180
Max. medium wire Ø cutting ca	pacity (mm)	2.2	3.5
53236	ldent. No.	730 •	-
53232	Ident. No.	-	020 •

Prod. Gr. 5HZ

ATORN VDE snipe nose pliers

Application:

For gripping, holding and cutting.

Execution:

- Tempered tool steel
- Serrated gripping surfaces
- Blades inductively hardened for hard and soft wire
- VDE type according to DIN EN 60900
- Ident. No. 910, 920: Flat, round jaws, type A
- Ident. No. 915, 930: Flat, round jaws, type B, 45°

Advantage:

 Safe, ergonomic and fatigue-free working thanks to two-component handles

Technical data:

- Surface: Chrome plated
- VDE certified: Yes
- Material of handle: 2-component plastic



Ident. No. 920



Ident. No. 930

Length (mm)			160	200
	Design			
53092	Straight	ldent. No.	910 •	920 •
53092	Curved	ldent. No.	915 ●	930 ●

Prod. Gr. 5HZ

ATORN VDE Langbeck flat nose-pliers

Application:

For gripping and holding in confined areas.

Execution:

- Tempered tool steel
- Long, slim, flat jaws

- Serrated gripping surfaces
- VDE type according to DIN EN 60900

Advantage:

• Safe, ergonomic and fatigue-free working thanks to two-component handles

Length (mm)		160
Surface		Chrome plated
VDE certified		Yes
Material of handle	2-component plastic	
53046	ldent. No.	910 •

Prod. Gr. 5HZ

ATORN VDE Langbeck round-nose pliers

with long, round jaws

For bending grommets with different radii for wireshaped materials.


Execution:

- Tempered tool steel
- Long, slim, round jaws

- For bending lugs from 2.5 to 7.5 mm in diameter
- VDE type according to DIN EN 60900

Advantage:

• Safe, ergonomic and fatigue-free working thanks to two-component handles





106

ATORN VDE water pump pliers with large clamping range

with a through joint, 2-component VDE-insulated grip covers

Execution:

- 30% larger gripping area
- enhanced self-clamping with optimised jaw design
- fine adjustment graduations owing to quick-snap ratchet principle
- spring-driven sliding block ensures quicker engagement
- opposing toothing at the back of the jaws ensures aggressive gripping
- inductively hardened, serrated jaws
- VDE type according to DIN EN 60900

Technical data:

- Length: 250 mm
- Max. clamping width: 50 mm
- Surface: Chrome plated
- Material of handle: 2-component plastic
- VDE certified: Yes



Prod. Gr. 5HZ

ATORN

VDE side cutters

Swedish form

Execution:

- Swedish design
- Tempered tool steel
- Inductively hardened blades
- VDE type according to DIN EN 60900

Advantage:

• Safe, ergonomic and fatigue-free working thanks to two-component handles

Technical data:

- Surface: Chrome plated
- VDE certified: Yes
- Material of handle: 2-component plastic



Length (mm)		130	140	160	180
Max. hard wire Ø cutting capacity (mm)		1.6	1.8	2.0	2.5
Max. medium wire capacity (mm)	Ø cutting	2	2.5	2.8	3.2
53250	ldent. No.	900 •	910 •	920 •	930 •

Prod. Gr. 5HZ

ATORN VDE heavy-duty side cutters

Application:

for easy cutting of wires and cables.

Execution:

Advantage:

power joint with up to 20% power saving

safe, ergonomic and effortless work thanks to

- VDE type according to DIN EN 60900
- special tool steel, oil-hardened
- inductively hardened blades

2-component handles

Technical data:

- Surface: Chrome plated
- VDE certified: Yes
- Material of handle: 2-component plastic

required thanks to optimal leverage

■ for heavy-duty long-term use

• excellent cutting performance with low force



Ident No 180

Length (mm)		160	180	200
Max. medium wire Ø cu (mm)	itting capacity	3.5	3.8	4.2
53256	Ident, No.	160	180	200

Prod. Gr. 5HZ

VDE wire stripping pliers

with spiral spring

Execution:

- Tool steel, tempered
- With coiled opening spring
- With adjusting screw and locking nut
- VDE type according to DIN EN 60900

Advantage:

 Safe, ergonomic and fatigue-free working thanks to two-component handles with hand guard

Technical data:

- Length: 160 mm
- Min./max. stripper size: 0.5-6 mm²
- VDE certified: Yes
- Surface: Chrome plated
- Material of handle: 2-component plastic





ATORN Roller tool case ABS

with VDE tool equipment, 44 pieces

Execution:

- High-strength case shell with circumferential aluminium frame
- User-friendly telescopic pull handle, robust inline
- Lockable toggle locks and central combination
- Sewn-in tool compartments, document compartment in lid
- Variably divisible base shell

Delivery:

- 1 x VDE Slim screwdriver, slotted 3.5/4.0/5.5 and 6.5 mm
- 1 x VDE Slim screwdriver recessed head PH 1,2 PZ 1.2. PHZ 1.2 TX 15.20.25
- 1 x VDE water pump pliers, heavy-duty combination pliers, straight snipe nose pliers,

- curved snipe nose pliers, side cutters, heavy-duty side cutters, cable cutters
- 1 x insulated tweezers, straight and curved, working knife, cable knife with hooked blade
- 1 x automatic wire stripping pliers, crimping tool for wire end ferrules, crimping tool for cable lugs
- 1 x machinist's hammer 300 g, recoil-free softface hammer, 30 mm head
- 1 x electrician's chisel, small saw bow 150 mm. utility knife with 18 mm snap-off blade
- 1 x triangular scraper with insulated blade, universal cable cutters, universal switch cabinet
- 1 x VDE single open-end wrench AF 10,13,17 mm, voltage tester screwdriver
- 1 x LED inspection light, alu mm, folding rule, telescopic

er	
aluminium spirit level 400 pic inspection mirror	
350	



52560... Prod. Gr. 580

ATORN Leather tool bag with VDE tool assortment, 17 pieces

Ident, No.

Execution:

- Robust, lockable leather tool case
- VDE tools according to DIN EN 60900
- Pliers with two-component handle and chromeplated head
- Screwdriver with protective insulation and ergonomic two-component handle

Advantage:

 Produced to the highest standard of quality and tested individually

Delivery:

■ 1 each of VDE screwdriver, slotted 2.5/3.5/5.5/8.0

- 1 each of VDE screwdriver Phillips PH1, PH2
- 1 x VDE combination pliers 180 mm
- 1 x VDE side cutters 160 mm
- 1 x VDE snipe nose pliers 200 mm
- 1 x VDE water pump pliers 250 mm
- 1 x automatic wire stripping pliers
- 1 x cable knife with hooked blade
- 1 x machinist's hammer 300 g
- 1 x universal switch cabinet key
- 1 x voltage tester screwdrivers

Technical data:

■ VDF certified: Yes



300 52560.. Ident. No.

Prod. Gr. 582

Tool assortment ATORN

for electricians, 18 pieces

Delivery:

- 1 x VDE screwdrivers, 6 pieces, slotted/PH
- 1 x voltage testing screwdriver
- 1 x switch cabinet key
- 1 x VDE combination pliers 180 mm
- 1 x VDE snipe nose pliers 200 mm, angled
- 1 x VDE side cutters 160 mm
- 1 x automatic wire stripping pliers
- 1 x electrician's knife
- 1 crimping pliers 0.25-16 mm²
- 1 x BENNING DUTEST continuity tester
- 1 x LED pen light with batteries
- 1 x ERSA soldering iron Multitip C 25
- 1 x tin solder 250 g

52561 Ident. No.	_			
	5	7561	ldent. No.	030

Prod. Gr. 5HZ



ATORN Machinist's hammer

with ultra-safe, three-component handle

Application:

For vibration-free striking that is gentle on joints.

- Ergonomic and non-slip application
- Forged protective handle collar and additional protective handle sleeve
- DIN 1041 hammer head, C45 steel, electric-inductively hardened

Advantage:

With patented ultra-secure handle (aluminium core, polyamide and rubber component)

- Recoil-free
- Handle fastening: Glued
- Protective handle sleeve available: Yes







Weight of head (kg)	0.3	0.5	1	1.5	2
Length (mm)	300	320	360	360	400
51180 Ident. N	0.030	050	100	150	200

Prod. Gr. 520

ATORN Machinist's hammers (DIN 1041) German type

Application:

For machining all components in compliance with high safety standards

Execution:

- Ergonomic Hickory wooden handle DIN 5111, extremely rigid
- Extended hammer head eye with additional plastic protective handle sheath
- DIN 1041 hammer head, C45 steel, forged, hardened, annealed

■ Polished working surface

Advantage:

■ Head and handle are connected via a safety ring wedge

Technical data:

- Recoil-free
- Material of long handle: Hickory
- Handle fastening: Splined
- Protective handle sleeve available: Yes



Weight of head	l (kg)	0.2	0.3	0.4	0.5	0.6	0.8	1	1.5	2
Length (mm)		280	300	310	320	330	350	360	380	400
51188	Ident. No.	510 •	520 •	530 •	540 •	550 •	560 ●	570 ●	580 •	590 •

Prod. Gr. 520

ORION®

Machinist's hammers (DIN 1041)

German type

Execution:

- DIN 1041 hammer head, C45 steel, electric-inductively hardened
- Polished impact surfaces
- Ergonomically shaped ash handle, waterproofed, painted

■ With safety ring wedge

Technical data:

- Material of long handle: Ash
- Handle fastening: Splined



Weight of hea	nd (kg)	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1	1.5	2
Length (mm)		260	280	300	310	320	330	350	360	380	400
51180	ldent. No.	500	510	520	530	540	550	560	570	580	590
31100	ldent. No.	•	•	•	•	•	•	•	•	•	•

Prod. Gr. 593

ORION®

Roofer's hammer (DIN 7239)

Southern German shape

Execution:

- Rubber handle
- Handle lock

Nail holder and roughened face

Advantage:

■ With extremely strong magnet

Weight (kg)		0.95
Weight of head (kg)	0.6	
Length (mm)	300	
Material of long handle		Steel
51190	ldent. No.	010
01170	ident. ivo.	•

Prod. Gr. 593



ORION[®] Club hammers German type


Execution:

- C45 steel, inductively hardened
- Painted black, polished work surfaces

Technical data:

■ Recoil-free

- Handle fastening: Splined
- Material of long handle: Ash
- Protective handle sleeve available
- Impact insert, interchangeable





DRIDN Copper hammers

club hammer shape


Execution:

- Head made of 99.9 % copper, double-strengthened, cold-formed
- Ground impact surface and edges
- Weight inserted in head, DIN hammer eye

■ Copper hardness: approx. 80-100 HB

Technical data:

- Material of long handle: Hickory
- Handle fastening: Splined



Prod. Gr. 520



Ref. no. 025-150



Ref. no. 200-500

DRION[®] Aluminium hammers

Execution:

- · Cylindrical shape, aluminium alloy to European standard 2011 T6
- Aluminium hardness: approx. 80-100 HB
- DIN hammer eye

Technical data:

- Material of long handle: Hickory
- Handle fastening: Splined



Head Ø (mm)		40	50	60	60	70
Length of head	(mm)	80	100	100	130	140
Length (mm)		300	320	350	360	380
Weight of head	(kg)	0.25	0.5	0.75	1	1.5
51202	Ident. No.	025	050	075	100	150
31202	ident. No.	•	•	•	•	•

Prod. Gr. 520

Composite rubber hammers (DIN 5128)

40

Execution:

■ Painted handle

Head Ø (mm)


Length (mm)

Weight of head (kg)

Hard quality, approx. 90 Shore A

Technical data:

■ Material of long handle: Ash







51204... Prod. Gr. 520

ATORN Soft-face hammer with interchangeable hammer inserts Blue cellulose acetate hammer heads

For controlled position impacts on workpieces in machine vices or during assembly tasks.

Ident. No.

Execution:

- High-quality die-cast zinc base
- With impact protection on the handle
- Blue cellulose acetate inserts
- Ergonomic wooden handle for a powerful impact

■ Replaceable individual parts

Technical data:

- Recoil-free: No
- Material of long handle: Ash
- Impact insert, interchangeable: Yes
- Colour of hammer head insert: Blue
- Handle fastening: Pinned



Head Ø (mm)		25	30	40	50
Length of head (mm)		86	95	107	115
Length (mm)		270	280	325	340
51206	Ident. No.	025	030	040	050
51200	ident. No.	•	•	•	•

Prod. Gr. 520

Accessories for		51206 025	51206 030	51206 040	51206 050
51206 Replacement impact insert blue	Ident. No.	125 •	130 •	140 •	150 •
51206 Spare ash hammer handle	Ident. No.	525 •	525 ●	540 •	540 •



ATORN Soft-face hammer with interchangeable hammer inserts

Hammer heads made of Nylon, white

Application:

For controlled position impacts on workpieces in machine vices or during assembly tasks.

Execution:

- High quality die-cast zinc basic body
- With handle impact protection
- Inserts made of Nylon White, hard, very wear resistant, no splintering
- Ergonomic wooden handle for a powerful impact

■ Replaceable individual parts

Technical data:

- Recoil-free: No
- Material of long handle: Ash
- Impact insert, interchangeable: Yes
- Colour of hammer head insert: White
- Handle fastening: Pinned



Head Ø (mm)		25	30	40	50
Length of head (mm)		86	95	107	115
Length (mm)		270	280	330	340
51206 Ident. No.		225	230	240	250
31200	ident. No.	•	•	•	•

Prod. Gr. 520

Accessories for		51206 225	51206 230	51206 240	51206 250
51206 Spare ash hammer	Ident. No.	525	525	540	540
handle	ident. No.	•	•	•	•
51206 Spare hammer insert	Ident. No.	325	330	340	350
nylon, white	ident. No.	•	•	•	•



recoil-free

Application:

Powerful impact action on metal while being gentle on muscles and joints thanks to lack of recoil.

Execution:

- Impact heads made from shatterproof polyurethane, replaceable
- Powder-coated precision steel tube handle

Advantage:

Ergonomically designed rubber handle

■ Hammer body filled with cast iron shot for recoilfree working

Technical data:

- Recoil-free: Yes
- Material of long handle: Steel
- Impact insert, interchangeable: Yes
- Colour of hammer head insert: Blue
- Handle fastening: Welded
- Protective handle sleeve available



Head Ø (mm)		30	40	50
Length of head (mm)		116	126	136
Length (mm)		351	376	386
Weight (kg)		0.46	0.58	0.76
51208	Ident. No.	300	400	500
31200	ident. No.	•	•	•

Prod. Gr. 520

	Accessories for		51208 300	51208 400	51208 500
51208	Spare inserts PU, blue	Ident. No.	330 •	440 •	550 •

DRIDN[®] Soft-face hammers

recoil-free with hickory handle

Application:

Ideally suited for straightening workpieces on machine tables.

Execution:

• Polyurethane heads, shatterproof, blue, medium-hard

Advantage:

• Gentle on arms and muscles as the recoil is reduced

■ The metal shot in the hammer head doubles the impact effect compared to standard hammers

Technical data:


- Recoil-free: Yes
- Material of long handle: Hickory
- Impact insert, interchangeable: Yes
- Handle fastening: Pinned
- Protective handle sleeve available: No



Head Ø (mm)		30	40	50
Length of head (mm)		115 125 13		
Length (mm)		350	375	385
Weight (kg)		0.45	0.75	1.25
51215	Ident. No.	510	520	530

Prod. Gr. 593

Accessories for		51215 510	51215 520	51215 530
51221 Spare inserts PU, yellow Suitable for soft-face hammer art. no. 51221025 to 160	ldent. No.	230 •	240 •	250 •
51221 Hickory spare handle Suitable for soft-face hammer art. no. 51215510 to 530	ldent. No.	430 •	440 •	-
51221 Hickory spare handle Suitable for soft-face hammer art. no. 51221025 to 070	Ident. No.	-	-	450 •



made of hornbeam

Execution:

Hornbeam head, with metal covering, smooth finish

Technical data:

- Material of long handle: Ash
- Handle fastening: Splined

Head Ø (mm)		50	60	70	80
Length of head (mi	m)	100	120	140	160
Length (mm)		280	300	320	350
Weight (kg)		0.2	0.3	0.55	0.85
51243	ldent. No.	050	060	070	080
31243	ident. No.	•	•	•	•

Prod. Gr. 593

Replacement handles for machinist's hammer (DIN 5111) **ORION**[®]

made of europlus hardwood, DIN 68340, quality class A

Application:

As spare handle for DIN hammer heads.

■ Waxed, with embossing

■ For hammers with eyes to DIN 1195



Execution:

■ Double-curved shape according to DIN 5111

Technical data:

■ Material of long handle: Robinia

Suitable for h	ammer weight	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1	1.5	2
Length (mm)		260	280	300	310	320	330	350	360	380	400
51246	ldent. No.	260	280	300	310	320	330	350	360	380	400
0.1240	luciii. ivo.	•	•	•	•	•	•	•	•	•	•

Prod. Gr. 520

ORION°

Replacement handle for club hammer (DIN 5135)

made of europlus hardwood, DIN 68340, quality class A

Application:

As spare handle for DIN hammer heads.

Execution:

■ Curved shape according to DIN 5135

■ Waxed, with embossing

■ For hammers with eyes to DIN 1195

Technical data:

■ Material of long handle: Robinia

Suitable for hammer w	eight (kg)	1	1.5	2
Length (mm)		260	280	300
51247 Ident. No.		260	280	300
		•	•	•

Prod. Gr. 520

DRION[®] Flat chisels

Execution:

■ Tempered impact head

■ Painted shaft

Technical data:

■ Material: Chrome-vanadium steel



Length (mm)		125	150	175	200	250	300
Width of cutting edge	(mm)	15	18	21	24	25	26
Shank width x shank	thickness	14 x 9 mm	17 x 11 mm	20 x 12 mm	23 x 13 mm	23 x 13 mm	23 x 13 mm
51256	Ident. No.	510 •	520 •	530 •	540 •	550 •	560 •

Prod. Gr. 593

DRION Cross-cut chisels

Execution:

■ Tempered impact head

■ Painted shaft

Technical data:

■ Material: Chrome-vanadium steel



Length (mm)		125	150	175	200	250
Width of cutting edge (mi	m)	5	6	7	8	9
Shank width x shank thic	kness	14 x 9 mm	17 x 11 mm	17 x 11 mm	20 x 12 mm	23 x 13 mm
51258	Ident. No.	510 •	520 •	530 •	540 •	550 •

DRIDN® Chisel sets

Execution:

- Tempered impact head
- Painted shaft
- Lengths: 120-150 mm
- 1 x flat chisel 150 x 11 x 10 and 125 x 11 x 10 mm
- Cross-cut chisel 125 x 10 x 5 mm
- each 1 drift punch 3 x 120 and 4 x 120 mm
- Centre punch 120 x 10 mm

Technical data:

■ Material: Chrome-vanadium steel

51262	In holder with base	Ident. No.	510 ●
51262	In metal case	ldent. No.	515 •

Prod. Gr. 593







ORION Grooving chisels

Execution:

■ Painted shaft

■ Tempered impact head

Length (mm)		150 150		150
Width of cutting edge (mm)		2 3		4
Shank width x shank thickness		12 x 12 mm	12 x 12 mm	
Material		Chrome-vanadium steel	Chrome-vanadium steel	Chrome-vanadium steel
51263	ldent. No.	500 •	510 •	520 •

Prod. Gr. 593

ORION° Mason's chisel

Execution:

Technical data:

- Tempered impact head
- Painted shaft

■ Material: Chrome-vanadium steel



Prod. Gr. 593

IRION Slitting or bodywork chisels

Execution:

■ Flat-oval shaft, painted

■ Tempered impact head

Length (mm)		240
Width of cutting edge (mm)	26	
Shank width x shank thickness	26 x 7 mm	
Material	Chrome-vanadium steel	
51266	Ident. No.	500 •

Prod. Gr. 593

DRION® Parting chisel

Execution:

■ The shaft thickness dimension indicates the cutting edge thickness (2 or 3 mm); the cutting edge width is 10 mm

- Tempered impact head
- Shaft, hexagonal, 10 mm, painted

Length (mm)		125	125
Width of cutting edge (mm)		10	10
Shank width x shank thickness		10 x 2 mm	10 x 3 mm
Material		Chrome-vanadium steel	Chrome-vanadium steel
51267	Ident, No.	500	510
31207	ident. No.	•	•

Prod. Gr. 593







DRION Electrician's chisel

Execution:

■ Tempered impact head

■ Painted shaft

Technical data:

■ Material: Chrome-vanadium steel

Length (mm)		200	250	250	250
Width of cutting edge (mm)		10	10	12	14
Shank width x sha	nk thickness	8 x 8 mm	8 x 8 mm	10 x 10 mm	12 x 12 mm
51268	ldent. No.	500 ●	530 •	540 •	550 •

Prod. Gr. 593

DRION Drift punch for assembly work

Execution:

■ 1:10 taper, ground bare

■ Painted shaft



Tip Ø (mm)		5	6	8	10	12	14	16
Length (mm)		180	200	200	230	280	315	380
Shaft Ø (mm)		12	13	16	22	27	30	36
51272	ldent. No.	050 •	060 •	080	100 •	120 •	140 •	160 •

Prod. Gr. 522

DRION Drift punch (DIN 6458)

made of chromium-vanadium steel, hardened

Execution:

■ Tempered impact head

■ Drive cone or drive point, bare

■ Painted shaft

Technical data:

■ Length: 120 mm

Material: Chrome-vanadium steel



Tip Ø (mm)		1	2	3	4	5	6	7	8	10
Shaft Ø (mm)		10	10	10	10	10	12	12	12	12
51281	ldent. No.	500 •	510 •	520 •	530 •	540 ●	550 •	560 ●	570 ●	580 •

Prod. Gr. 593

DRION Drift punch sets

made of chromium-vanadium steel, hardened

Execution:

- Tempered impact head
- Drive cone or drive point, bare
- Painted shaft
- Contents: 5x drift punches with tip diameter: 1/2/3/4/5 mm
- and 1 x centre punch with diameter 4 mm

Technical data:

Length: 120 mm

■ Shaft diameter: 10 mm

51282	In holder with base	ldent. No.	500 ●
51282	In metal case	ldent. No.	510 •

Prod. Gr. 593







Ref. no. 510

Pin punch (DIN 6450)

Application:

For driving split pins and studs out of clearance holes. $\,$

Execution:

- Tempered impact head
- Drive cone or drive point, bare

Painted shaft

Technical data:

- Length: 150 mm
- Material: Chrome-vanadium steel

Tip Ø (mm)	Shank width x shank thickness	51283 Ident. No.
2	10 x 10 mm	500
2.5	10 x 10 mm	510
3	10 x 10 mm	520 ●
3.5	10 x 10 mm	530 ●
4	10 x 10 mm	540 ●
4.5	10 x 10 mm	550 ●

Tip Ø (mm)	Shank width x shank thickness	5128	3
		ldent.	No.
5	10 x 10 mm	560	•
6	10 x 10 mm	570	•
7	12 x 12 mm	580	•
8	12 x 12 mm	590	•
10	12 x 12 mm	595	•
12	12 x 12 mm	597	•

DRION[®] Pin punch sets

Application:

For driving split pins and studs out of clearance holes.

Execution:

- Chrome-vanadium steel, tempered
- Tempered impact head
- Drive cone or drive point, bare
- Painted shaft

- **Ident. No. 500:** Tip diameter: 3/4/5/6/7/8 mm
- Ident. No. 520: Tip diameter: 3/4/5/6/8/10 mm

Technical data:

- Composition of set: Supplied shaft cross-sections: 10-12 mm
- Length: 150 mm

51284	In holder with base	Ident. No.	500 ●
51284	In metal case	ldent. No.	520 ●

Prod. Gr. 593



Ref. no. 500



Ref. no. 520

DRIUN Centre punch

Execution:

- Tempered impact head
- Bare tip
- Painted shaft

Technical data:

■ Material: Chrome-vanadium steel



Length (mm)		100	120	120	150
Shank width x sha	nk thickness	8 x 8 mm	10 x 10 mm	12 x 12 mm	12 x 12 mm
51296	Ident. No.	490 •	500 •	510 •	520 •

Prod. Gr. 593

ORION® Scriber


Execution:

- Ident. No. 010:
- CrV steel, hardened and bronzed
- One-piece construction
- With straight tip

- Knurled handle
- Ident. No. 020:
- One-sided, straight, chrome-plated
- Inlaid cemented carbide tip
- Plastic handle

Length (mm)		180	175
Shaft Ø (mm)		5	9
51310	ldent. No.	010 •	020 •

Prod. Gr. 523



DRION Scriber with straight and bent tip

Execution:

- No. 51315:
- CrV steel, hardened and bronzed
- One-piece construction
- Knurled handle
- No. 51315 500-51320 010: With straight and 90° bent tip
- No. 51320 010:

- Tips made from CrV steel, hardened and bronzed, screwed
- Knurled and zinc-plated steel handle, length 110 mm
- No. 51320 020:
- Hardened steel tips, nickel-plated surface
- Ergonomically shaped plastic handle in centre
- Angled side with 70° bend

Length (mm)		160	250	220
Shaft Ø (mm)		5	8	9
51315	Ident. No.	500 •	-	-
51320	Ident. No.	-	010 •	020 •

Prod. Gr. 523



ATORN Carbide scriber

with interchangeable carbide needle and attachment clip

Execution:

- HM needle regrindable
- Retractable pencil system
- No. 51330:

Length (mm)

Ø of needle (mm)

Shatterproof plastic housing

■ Non-slip grip zone

- No. 51331:
- Nickel-plated metal housing with attachment clip
- Knurled handle



51331... Prod. Gr. 523

51330...



ATORN HSS bimetal hand saw blades

Ident. No

Ident, No

precise and sharp toothing, flexible, high-performance saw blade

Application:

Ident. No. 590-610: For universal sawing tasks including on rustproof sheet steel.

Ident. No. 620, 640: Universal use in industry and

Ident. No. 630: For cutting hard and toughened steels that are difficult to machine

Execution:

- Ident. No. 590-610:
- Elastic blade body made from tool steel
- Long service life and excellent heat resistance
- Ident. No. 620:
- Flexible, tooth-hardened blade, sharp milled
- Quality Flex SS Tooth type

- Ident. No. 630:
- Flexible, side-set blade, sharp milled teeth
- Quality: Fully hardened HSS
- Ident. No. 640:
 - Toothed on both sides
 - Quality: SS high-speed steel, fully hardened

Advantage:

- Ident. No. 590-610:
- Completely shatterproof
- Particularly high cutting capacity owing to optimally hardened HSS teeth area

Technical data:

■ Saw blade length: 300 mm

• ATORN	HSS 8I-HARD = 12*/300 mm = 24 TPI	>>>>>	months •
	Ident. No. 590-610)	
•	ATORN * FLEX - 503 - ZAHRMARET - 200 - 123 + 120 W	- 0	•
	Ident. No. 620		
•	ATURN' HSS - MX 125 x MO em (A)	Made in Esemeny	•
	Ident. No. 630		
-	ATORN' HSS 200 x25 x 6,8 mm	8	-

ldent.	Nο	640
iuciii.	INO.	040

Number of teeth per i	nch		18	24	32
51648	Bi-metal, one-sided, T=18	Ident. No.	590 ●	-	-
51648	Bi-metal, one-sided, T=24	Ident. No.	-	600	-
51648	Bi-metal, one-sided, T=32	Ident. No.	-	-	610
51648	Flex, one-sided 24 Z	Ident. No.	-	620 •	-
51648	HSS, one-sided 24 Z	Ident. No.	-	630	-
51648	SS, double-sided, 24 Z	Ident. No.	-	640 •	-

Prod. Gr. 5HH

ATORN Aluminium hand saw frame

Execution:

- Die-cast aluminium
- Weighs only 650 g
- Captive pins hold the blade

Advantage:

- Soft, ergonomic rubber handles ensure fatiguefree working
- Quick-action clamping in grip

Suitable for sawblade length (mm)	300	
Overhang (mm)	400	
51849	Ident. No.	020 •



Prod. Gr. 528

- Bracket made from strong square tubing
- Aluminium grip, blue, powder-coated

Advantage:

- Blade can be adjusted eight ways
- Quick-action clamping in grip

Suitable for sawblade length (mm)	300	
51848	ldent. No.	020 •





DRION® Metal hand saw frame

Execution:

■ Solid steel bracket

■ Wing clamping nut

■ Wooden handle

Suitable for sawblade length (mm)	300	
51845	ldent. No.	500 •

Prod. Gr. 529



DRION® Metal hand saw frame

Execution:

- Bow made from rectangular pipe
- Handle silver powdercoated. With wing clamping

Advantage:

■ Blade can be adjusted by 90°



Suitable for sawblade length (mm)	300	
Tension force (N)		100
51846	Ident. No.	500 ●
Dund On EOO		

Prod. Gr. 529

DRION Hand saw frame

for saw blades 150 mm long

Execution:

Suitable saw blades art no 51811 011-041

■ Complete, with universal saw blade

Saw blade length (mm)		150
Length (mm)	255	
51805	ldent. No.	510 •

Prod. Gr. 529



ATORN Knives with snap-off blades

Execution:

- Ident. No. 010:
- With pushbutton mechanism and auto-lock mechanism

Ident. No. 010

- With 9 mm snap-off blade
- Ident. No. 020: locking wheel
- Ident. No. 020-030: With 18 mm snap-off blade
- Ident. No. 030: With slide lock



Advantage:

- Extremely robust and smooth-running thanks to stainless steel blade guide
- Ergonomically shaped full-metal housing



Ident. No. 020

Ident, No. 030

Length (mm)		150	157	153
Width of knife blade (mm)		9	18	18
53640	Ident. No.	010	020	030
		•		•

Prod. Gr. 582

ATORN Cutter blades

Trapezoidal blades and snap-off blades

Execution:

- Quality blades Made in Germany
- Long service life, very wear-resistant
- Precision sharp ground and hardened
- Ident. No. 109:
- Snap-off blades 9 mm



Ident. No. 109

- L: 84 mm x W: 9.1 mm x H: 0.4 mm
- Ident. No. 118-318:
- Snap-off blades 18 mm
- L: 100 mm x W: 17.7 mm x H: 0.5 mm
- Ident. No. 400:

Ident. No. 118

■ Trapezoidal blades

Cutterklingen

L: 61 mm x W: 18.7 mm x H: 0.65 mm

Delivery:

Ident. No. 109-118, 400: pack of 10

Ident. No. 318: pack of 50



Ident. No. 318

Ident. No. 400

	10 pa	ack / 9 mm	10	pack / 18 mm	50	pack / 18 mm) pack / pezoidal
Width of knife blade (mm)	5364 Ident.		5364 Ident.		5364 Ident.		53640 Ident.	
9	109	•	-	-	-	-	-	-
18	-	-	118	•	318	•	-	-
18.7	-	-	-	-	-	-	400	•

Prod. Gr. 582

ATORN Folding utility knife

Application:

For precise cutting of a wide range of materials

Execution:

- For all standard trapezoidal blades
- With steel belt clip

Advantage:

■ Ergonomically shaped aluminium handle

- Reliable locking of blade when folded out
- Padded thumb area for highly precise cutting pressure
- Quick-action lever ensures quick changeover of blades without tools
- Blade compartment integrated in the handle with 5 spare blades



Length (mm)	160	
Width of knife blade (mm)	18.7	
53644	Ident. No.	200
33044	ident. No.	•

Prod. Gr. 5HZ

Accessories for		53644 200
53640 Trapezoidal blades 18.7 mm, pack of 10 pcs. Suitable	Ident No	400
for all utility knives with trapezoidal	Ident. No.	•
blade, 10 pack / trapezoidal		

DRION Utility knives with trapezoidal blades

Execution:

- Die-cast housing
- Ident. No. 500:
- With retractable blade
- Mechanically adjustable blade

Advantage:

- Ident. No. 600–700: Safe working processes thanks to automatic blade retraction
- Ident. No. 700:
 - Ergonomic handle with soft component

 Blades are changed without needing to screw them on



Width of knife blade: 18.7 mm







Ref. no. 500

Ref. no. 600

Ref. no. 700

Length (mm)		150	160	162
53642	Ident. No.	500	600	700
00012	ident. ivo.	•		•

Prod. Gr. 598

Accessories for		53642 500	53642 600	53642 700
53642 Trapezoidal blades, 18.7 mm, standard, pack of 10 pieces Suitable for all utility knives with trapezoidal blade	ldent. No.	610 •	610	610 •

DRIDN Knives with snap-off blades

Execution:

- With mechanical blade catch
- Ident. No. 100-110:
 - Die-cast zinc housing

- Stainless steel blade guide
- Ident. No. 100-110, 510: Includes 2 spare blades in housing
- Ident. No. 500-510: Plastic housing

Advantage.

- Ident. No. 100: With protective cap on tip
- Ident. No. 110: Ergonomic design with rubber handle









Ref. no. 110

Ref. no. 510

Length (mm)		145	165	140	160
Width of knife blade (mm)		9	18	9	18
E2442	Ident Ne	100	110	500	510
53643	ldent. No.	•	•	•	•


Accessories for		53643 100	53643 110	53643 500	53643 510
53643 Snap-off blades, 9 mm, standard, pack of 10 pieces Suitable for all knives with snap-off blade	ldent. No.	600 •	-	600 •	-
53643 Snap-off blades, 18 mm, pack of 10 pcs. Suitable for all knives with snap-off blade	Ident. No.	-	610 •	-	610 •

ATORN Profiled fine scraper

Execution:

- 3-edged hollow-section scraper
- Special tool steel blade

- Entire handle is made from extremely impact-resistant, tough plastic
- With protective cap for the cutters



Prod. Gr. 5HI

DRIDN[®] Scraper set

4 pieces

Execution:

- Stainless steel blades
- Can be ground
- Blade widths: 20/32 mm

■ Blade length: 55/105 mm

Advantage:

- Non-slip plastic grip fits perfectly in your hand
- With stainless steel cap indestructible

Material of handle		Plastic
53704	ldent. No.	500 ●

Prod. Gr. 598



ATORN Triangular hollow-ground scraper


Execution:

Special tool steel

Enamelled

Technical data:

■ Material of handle: Wood



Prod. Gr. 5HI



ATORN Triangular solid scraper

Execution:

Special tool steel

Blade length (mm)

■ Enamelled

Technical data:

■ Width of knife blade: 10 mm

■ Material of handle: Wood

	150	200
Ident No	510	520

53706... Prod. Gr. 5HI



Triangular solid scraper

ATORN Flat scrapers


Execution:

■ Special tool steel

Enamelled

Technical	data.
1 C CIIIIICai	uata.

■ Material of handle: Wood



Prod. Gr. 5HI



Flat scrapers

DRION* Flat scrapers

Execution:

- With soldered cemented carbide cutting insert
- Painted blade

Technical data:

■ Material of handle: Wood



Ref. no. 270-320

Blade length (mm)		190	210	240
Width of knife blade (mm)		15	20	25
53711	ldent. No.	210 •	270 •	320 •

Prod. Gr. 550

DRION* Flat scraper with carbide reversible tip

carbide scraper tip

Execution:

- Galvanised blade holder
- In plastic box with Allen key

Advantage:

■ With replaceable cemented carbide cutting insert

 The scraper plates are four-bladed, ground and lapped; they can also be used for electric hand scrapers

Technical data:

Material of handle: Wood

Blade length (mm)		ade length (mm) 300		350
Width of knife blade (mm)		20	25	30
53712	ldent. No.	010 •	020 •	030 •

Prod. Gr. 550

Accessories for		53712 010	53712 020	53712 030
53713 Spare carbide indexable insert Suitable for flat scraper art. no. 53712010 to 030	Ident. No.	010 •	020 •	030 •



Ref. no. 010-020

DRIDN[®] Seal scraper

Application:

For effortless removal of old seals, adhesive residues and labels on flanges, cylinder heads, valve covers and other flat surfaces.

Execution:

 High-alloy chrome-vanadium steel, forged, chrome-plated

Advantage:

• With ergonomic multi-component hexagonal handle in impact-resistant plastic

Blade length (mm)		150
Width of knife blade (mm)		25
53714	Ident. No.	010
557 14	ident. No.	•

Prod. Gr. 550

Stt (COMM.DD)

ATORN Circular awls, square reamers, universal jack

with ergonomically shaped handle

Application:

Ident. No. 010: For expanding holes in soft materials

Ident. No. 020: For expanding and reaming holes Ident. No. 030: For raising and lifting out

components, clamps and nails

Execution:

- Impact-resistant 1-component handle with large palm rest
- Ergonomically shaped for optimum force transmission
- Ident. No. 020: Square tip hardened for reaming
- Ident. No. 030: Claw foot with lifting groove, hardened







Ident. No. 030

ldent. No. 010 ldent. No. 020

Blade Ø (mm)		6	6	-
Blade length (mm)		101	100	99
Length (mm)		181 180		179
52840	ldent. No.	010	020	030

Prod. Gr. 5HI

DRIDN[®] Electronics and telephone shears

Application:

For cutting fine wires and cables.

Execution:

■ Nickel-plated

- Ident. No. 010: Special electronics scissors
- Ident. No. 020: Special electronics scissors, curved blade
- Ident. No. 030: Electricians' scissors with wire cutters

Length (mm)		115	115	125
Design		Straight	Curved	Straight
53717	Ident. No.	010 •	020 •	030 •

Prod. Gr. 551



Ref. no. 010-020 Electronics scissors



Ident. No. 030 Electrician's scissors

DRION® Goldsmith's scissors

Application:

For cutting fine and soft sheet metal.



No. 53718 010

Execution:

■ Bare head



• No. 53718 015: Scissor eyes coated with plastic



No. 53718 015

Length (mm)		180	180	180
Design		Straight	Scissor-style handles Straight	Curved
53718	Ident. No.	010 •	015 •	-
53719	ldent. No.	-	-	010 •

Prod. Gr. 551

IRION Work knives/fitter's knives

Execution:

- Ident. No. 100-110: Blue plastic handle
- Ident. No. 100-115: Rustproof, fixed blade
- Ident. No. 115: Beech wood handle
- Ident. No. 120:
- Rustproof blades and tools
- Pocket knife with 6 fold-out tools
- Ident. No. 125:
- Fold-out and lockable rustproof blade
- Handle with wooden insert
- Includes leather belt pouch
- Ident. No. 130:
 - One-handed folding knife with blade locking
- With stripping function integrated in stainless steel blade
- Plastic handles with fluting
- Ident. No. 210:
- Strap knife (plasterboard knife) folding, one piece with ring
- Curved carbon steel blade





Ref. no. 120



Ref. no. 125



Ref. no. 130



Ref. no. 210

Length (mm)		180	270	290	120	220	182	185
53719	ldent. No.	100 •	110 •	115 •	120 •	125 •	130 •	210 •

Prod. Gr. 551

DRION[®] Precision scissors

Application:

Ident. No. 001-002: For delicate, precise cutting

Ident. No. 003: For highly precise cutting tasks

Ident. No. 004: For precise cutting in very tight

Execution:

- Pointed
- With extremely sharp cutting edge
- Nickel-plated surface



Ref. no. 001-002 Straight or bent



Ref. no. 004 Sticker scissors

Length (mm)		110	110	105	90
Design		Straight	Curved	Straight	Straight
53720	ldent. No.	001	002	003	004
33720	idelit. No.	•	•	•	•

Silhouette scissors

Prod. Gr. 551

DRIDN* Paper scissors and multi-purpose scissors

Execution:

- Ident. No. 010-020: Nickel-plated
- Ident. No. 030: Rustproof blades
- Ident. No. 030-040:

- Plastic handles
- For left-handed and right-handed users
- Ident. No. 040:
 - Stainless steel blade, non-rusting
- HRC 50-54
- Ident. No. 050:
 - Blades rustproof, cannot be disassembled
- Plastic handles, toothed recess



Ref. no. 030

Ident. No. 040

Ref. no. 050

Length (mm)			150	200	250	205
53720	Paper scissors	ldent. No.	010 •	015 •	020 •	-
53720	Multi-purpose scissors	Ident. No.	-	-	040 •	030 •
53720	Universal cutters	Ident. No.	-	-	050 •	-

Prod. Gr. 551

DRION Universal scissors, titanium coated

Application:

For cutting cardboard, glass fibre, special fibres, fabric film

Execution:

- Titanium-coated blades with teeth to prevent the item being cut from slipping
- High blade wear resistance
- Scissor eyes with two-component handles, ergonomically shaped

Technical data:

■ Design: Straight

Length (mm)		175	210
53721	ldent. No.	030 •	040 •





Ref. no. 030



Ref. no. 040

DRION® Work scissors

Execution:

- Nickel-plated blade surface
- Ident. No. 005:
- Micro-serrated cutting edges
- Rounded tips
- Ident. No. 006:

- Lower cutting edge bevelled at the front
- Pointed top blade
- Ident. No. 006, 020: Smooth cutting edges
- Ident. No. 010:
- Serrated cutting edges
- Can be taken apart



Technical data:

■ Design: Straight



Length (mm)		105	175	210	250
53721	Ident. No.	005	006	010	020
33721	ident. No.	•	•	•	•

Prod. Gr. 551

Multipurpose scissors

with stainless steel blades

Ident. No.

Application:

For cutting a variety of materials including thin sheets

Execution:

Stainless steel blades - non-rusting

- Fine-toothed cutting edge prevents slipping
- Ergonomically-shaped, robust plastic handles

190

Straight

190

•

- Straight, self-opening with internal spring
- Overhead locking device for safe transport



Ident. No. 190

53721... Prod. Gr. 5HZ

Length (mm)

Design

DRION All-purpose shears

Application:

For cutting sheet metal, soft wire, iron bands, fabric, cardboard, plastic, paper, leather, flowers, branches, carpets, twine etc.

Execution:

- Especially robust
- Rustproof stainless steel head

Screw joint prevented from coming loose

Advantage:

150

Straight

150

•

- Serrated cutting edges, making them particularly non-slip
- With safety lock
- With ergonomic handles for safe and fatigue-free work



Length (mm)		180
Design		Straight
53723	ldent. No.	010 •

Prod. Gr. 598

All purpose and electrician's shears **ORION**[®]

Application:

For cutting cables, insulating material, cable ducts, leather, cardboard etc.

Execution:

■ Stainless steel head

Screw joint prevented from coming loose

Advantage:

- One blade has fine teeth, one is smooth, thereby ensuring precise working on cables
- Durable, robust two-component handle, non-slip and ergonomic







ORION Scissors for fabric

Application:

Ident. No. 001: For cutting hard-to-cut materials such as glass, carbon fibre or aramide materials

Ident. No. 002: For cutting hard-to-cut materials such as glass, carbon fibre or aramid fabric (Kevlar).

Execution:

■ Precision-ground cutting edge

Serrated on one side

■ Bolted and adjustable joint

■ Ident. No. 001: Painted handles

■ Ident. No. 002: PVC-dipped handles

Technical data:

■ Design: Straight



Ref. no. 001



Ref. no. 002

53727 Ident. No. 001 002	Length (mm)		200	250
	53727	ldent. No.	001 •	

Prod. Gr. 551

ATORN Crate pliers

Application:

For easy opening of crates without risk of injury.

Execution:

- Pushing the arms together raises the spring out of the stop cam groove
- With a bolt-shutter, the jaws pull the bolt from the stop cam groove when the arms are pressed together
- Optimised lever transmission
- Ergonomically designed 2-component handle

Advantage:

 Using these pliers saves time, increases safety and presents no risk of injury



Length (mm)		221
Surface		Chrome plated
Material of handle		2-component plastic
53754	Ident. No.	100 •

Prod. Gr. 5HZ

ATTIRN Leather wad punch (DIN 7200)

made of special steel, die-forged

Application:

For punching holes in a range of materials.

Execution:

- Special steel, drop-forged
- Conical relief

- Ground and polished pipes
- Blue enamel paint



Ident. No. 506



Ident. No. 520



Ident. No. 530



Ident. No. 551

Ø (mm)	Length (mm)	53815 Ident. No.
2	105	502
3	105	503
4	105	504
5	110	505
6	110	506 ●
7	120	507
8	120	508
9	120	509
10	120	510 ●
11	130	511 ●
12	130	512
13	140	513
14	140	514
15	140	515
16	140	516 ●
17	145	517 ●

14	140	514	•	ſ
15	140	515	•	
16	140	516	•	
17	145	517	•	
rod. Gr. 5HI				

	_	
Prod.	Gr.	ЭHI

Ø (mm)	Length (mm)	53815 Ident. No.
18	145	518
19	145	519
20	160	520
21	160	521
22	170	522
23	170	523
24	170	524
25	170	525
26	170	526
27	175	527
28	175	528
29	175	529
30	190	530
31	190	531
32	190	532
33	193	533

Ø (mm)	Length (mm)	53815 Ident. No.
34	195	534
35	195	535
36	200	536
37	205	537
38	205	538
39	205	539
40	205	540
42	220	542
44	220	544
46	220	546
48	230	548
50	230	551 ●
55	240	555 ●
60	260	560 ●

Set of leather wad punches (DIN 7200)

Diameter 3-20 mm

Application:

For punching holes in a range of materials.

Execution:

■ Special steel, drop-forged

- Conical relief
- Ground and polished pipes
- Blue enamel paint
- Set in plastic roll-up pouch

Composition of set		Supplied diameters: 3/6/8/10/16/20 mm	Supplied diameters:	Supplied diameters:
Number of pieces in assortment/set		6	8	12
53815 Ident. No.		800 ●	810 •	820 •

Prod. Gr. 5HI



Ident. No. 820

ATORN Revolving punch pliers, adjustable

without or with lever joint (ratio)

Application:

For perforating leather, textiles and plastic materials

- Hardened, precisely-sharpened hole punches
- Hole diameters: 2, 2.5, 3, 3.5, 4 and 4.5 mm
- Hole viewing window on back of pliers
- Rotation direction arrows on both sides
- Ergonomically shaped plastic handles
- Ident. No. 700:

- Automatic locking device one-hand operation - opens automatically and prevents jamming during work.
- Brass anvil diameter 9 mm
- Ident. No. 710:
 - Patented lever system means an effortless punching force of up to 4000 N
- Steel anvil diameter 12 mm

Technical data:

■ Min./max. diameter: 2-4.5 mm



Ident. No. 700



Prod. Gr. 5HZ



Ident. No. 710

ATORN HSS bimetal hole saws

made of HSS bi-metal

Application:

For sawing circular holes in unalloyed steel (up to 700 N/mm²), non-ferrous metals, light metals, plastics, plaster, fibre and plywood boards, light-weight building boards and general wood processing.

Execution:

■ High degree of concentricity



Ident No 064 Without drive arbor

- Solid base plate with improved stability
- Cutting depth maximum 38 mm
- Drill bit can be replaced with other commercially available mounts
- Excludes mounting shank and drill bit; please order separately!



Ident. No. 108 Without drive arbor

■ In individual packages, with information regarding cutting values

Advantage:

- Lateral slots in the body help to remove cut parts
- More even cut, reduced vibration and heat generation and less force required thanks to variable teeth spacing with 4/6 teeth per inch



Ø (mm)	53841	
	Ident. No.	
14	014	
16	016	
17	017	
10	010	

Ø (mm)	53841 Ident. No.
20	020
21	021 •
22	022
24	024

Ø (mm)	5384 Ident.	
25	025	•
27	027	•
29	029	•
30	030	•

Hand tools \ Hole punchers, hole saws

Ø (mm)	53841
	Ident. No.
32	032
33	033
35	035
37	037
38	038
40	040
41	041
43	043
44	044
46	046
48	048
51	051 •
52	052 ●
54	054 ●
57	057

Ø ()	52044
Ø (mm)	53841
	Ident. No.
59	059
60	060 ●
64	064 ●
65	065 ●
67	067 ●
68	068 ●
70	070 •
73	073
74	074 •
76	076 ●
79	079
83	083
86	086
89	089 •
92	092 •
	•

Ø (mm)	5384	1
, ,	Ident.	No.
95	095	•
98	098	•
102	102	•
105	105	•
108	108	•
111	111	•
114	114	•
121	121	•
127	127	•
140	140	•
152	152	•
160	160	•
168	168	•
177	177	•
210	201	•

Prod. Gr. 528

ATORN Accessories

for HSS bimetal hole saws

Application:

Ident. No. 230: As mounting shank for keyhole saws from 14-30 mm in diameter

Ident. No. 250: As mounting shank for keyhole saws from 32-210 mm in diameter

Ident. No. 270: As spare centring drill for keyhole

saw mounting shanks

Ident. No. 280: For extending the hexagon mounting shanks of keyhole saws

Ident. No. 330: To eject the centre after cutting

Execution:

- Ident. No. 210-250: Includes centring drill
- Ident. No. 230, 250: Please note that the striking mechanism must be switched off when SDS is used!
- Ident. No. 270: HSS centring drill, 6.35 mm







Ident. No. 280

Ident. No. 230, 250

Suitable for min./ma	ax. Ø		14-30 mm	32-210 mm	14-210 mm
53841	Mounting shank with 9.5-mm hexagon drive	ldent. No.	210	-	-
53841	Mounting shank with 11.1-mm hexagon drive	ldent. No.	-	240 •	-
53841	Mounting shank with SDS drive	Ident. No.	230	250 •	-
53841	Spare centring drill, 6.35 mm	Ident. No.	-	-	270 •
53841	300-mm extension for 9.5 and 11.1-mm hexagon mounting shank	Ident. No.	-	-	280 •
53841	Ejector spring	Ident. No.	-	-	330 •

Prod. Gr. 528

ATORN Hole saw sets

Application:

For sawing circular holes in unalloyed steel (up to 700 N/mm²), non-ferrous metals, light metals, plastics, plaster, fibre and plywood boards, light-weight building boards and general wood processing.

Execution:

- HSS bi-metal
- Two mounting shanks with hexagon drive
- Includes spare centring drill
- Stored in robust tool case

Advantage:

- Lateral slots in the body help to remove cut parts
- More even cut, reduced vibration and heat generation and less force required thanks to variable teeth spacing with 4/6 teeth per inch





Ident. No. 005

Ident. No. 006

Ident. No. 008

Number of pieces in assortment/set (PCS)		10	12	15
Composition of set		Supplied diameters: 22/29/35/44/51/64/68 mm	Supplied diameters: 16/19/22/29/35/44/52/57/67 mm	supplied diameters: 16/19/22/25/ 29/32/35/38/44/51/64/76 mm
53841 Ident. No.		005 ●	006 •	008 •

DRION[®] Manual riveting tool

Application:

For blind rivets made from aluminium alloy, copper, steel and stainless steel.

■ Ergonomically shaped handles

Delivery:

With 4 nosepieces

■ Hand riveting pliers with transmission

Length (mm)		270
Suitable for max. rivet Ø (rivet material: aluminium) (mm)		4
Suitable for max. rivet Ø (rivet material: stainless steel) (mm)		4
53197 Ident. No.		020 •

Prod. Gr. 593

Telescopic inspection mirror **ORION**®

Round or rectangular mirrors

Application:

Ident. No. 270–290: For inspecting partly concealed areas.

Execution:

- Ident. No. 270:
- Chrome-plated metal handle
- With attachment clip
- Ident. No. 270-280: Round mirror

- Ident. No. 280-290: Plastic-coated metal handle
- Ident. No. 290: Rectangular mirror, mirror dimensions 43 x 65 mm
- Ident. No. 360:
 - Telescopic handle can be extended to 415 mm max.
 - Rectangular mirror dimensions 100 x 150 mm
 - 1C handle

Ø of mirror (mm)		30	50	43	100
Max. extension length (mm)		520	730	720	415
52995	ldent. No.	270 •	280 •	290 •	360 •

52995 360 = Prod. Gr. 580 52995 270 = Prod. Gr. 598 52995 280 = Prod. Gr. 598 52995 290 = Prod. Gr. 598



Ref. no. 360

ORION[®] Inspection set

Modular system

Application:

For all inspection tasks.

Execution:

■ In case with impact-resistant foam inlay

D	elivery:
2	mirroro

2 mirrors (round 60 mm, rectangular 65 x 43 mm), telescopic handle, LED inspection lamp, magnetic attachment, batteries

Ø of mirror (mm)		60
Width of mirror (mm)	,	43
Mirror height (mm)		65
Max. extension length (mm)		600
52995	Ident. No.	500 •



DRION Easy-opener and multi-opener

Application:

the ideal tool for gently opening sensitive components

Execution:

- Ident. No. 100:
- delicate, slim design flexible and strong at the
- three lever surfaces with different material thicknesses
- ideal for loosening e.g. switches, lights or similar elements
- Ident. No. 110:
- slim design flexible and strong at the same time, made of glass-fibre reinforced polyamide
- conductive ESD material protects against electrostatic discharge
- does not scratch delicate surfaces
- steel insert on the handle side e.g. for prying open paint cans

Length (mm)		178	180		
	Width (mm)	Material of handle			
56549	32	PA - Polyamide	Ident. No.	100 •	-
56549	32	Plastic glass fibre reinforced	Ident. No.	-	110 •

Prod. Gr. 598



Ref no 100



Ref. no. 110



ATORN Release lever

with wooden handle

Application:

For detaching e.g. door panels or similar

Execution:

- Steel blade, powder-coated for better sliding effect and to prevent damage to painted surfaces
- with wooden handle

■ Blade width 26 mm, blade thickness 2 mm, groove width 7.4 mm

Technical data:

- Length: 250 mm
- Surface: Lacquered



53713	Ident. No.	500 ●

Prod. Gr. 5HI

ATORN

Nail puller and tyre lever

Hexagon profile, painted

Execution:


- Special tool steel, forged, hardened, powder-coated
- Ident. No. 010-030:
 - With claw on the 90° curved side
 - Chisel end on opposite side for levering and demoulding
- Ident. No. 100:
 - With tip on one side
 - Chisel end on opposite side for levering

Advantage:

■ Ident. No. 010-030: Indestructible, durable quality, made in Germany

56607	ident. No.	•	•	•	•
56607	Ident. No.	010	020	030	100
Weight (kg)		1.02	1.46	1.94	0.63
Ø (mm)		18	18	18	16
Length (mm)		400	600	800	400

Prod. Gr. 5HI



Pry bar set **ORION**°

4 pieces

Application:

For all kinds of leverage tasks.

Execution:

- Angled blades
- Lever bar lengths: 200, 300, 450, 600 mm

Advantage:

- Non-slip plastic grip fits perfectly in your hand
- With impact-resistant grip indestructible and robust in application

Technical data:

■ Material of handle: Plastic







DRION° Offset pins (flange mounting tool)

Application:

For coaxial alignment of flanges and other parts.

Execution:

- specialist tool steel, round, red powder-coated
- 90° angle, curved
- tempered working points

Shaft Ø (mm)		10	12	14	16	20	26
Tip Ø (mm)		5	5	6	6	7	8
Limb length (mm)	100	110	120	130	150	170
Length (mm)		300	350	400	450	500	550
56618	ldent. No.	010	012	014	016	020	026
		•	•	•	•	•	•

Prod. Gr. 576

ATORN Pipe brushes for hand or machine use

with threaded pin, trimming material steel, stainless steel, brass or nylon

Application:

For cleaning pipes, gratings, sleeves and cylinders and for deburring e.g. cross-drilled holes and similar features

Execution:

- Longest service life thanks to top wire quality
- Optimal flexibility and bending strength
- Uniform distribution of the filling wire ensures a high level of concentricity.
- Ident. No. 008-020: Edging: Steel wire, crimped
- Ident. No. 008-320:

Stainless steel

Stainless steel

Stainless steel

30

- With M6 connecting thread for handle, extensions or adapter
- Machine use possible with adapter: Up to max. 3000 rpm (rotation speed) — use brush clockwise!

- Ident. No. 108—120: Edging: Stainless steel wire, crimped
- Ident. No. 208–220, 622–630: Edging: Brass wire, crimped
- Ident. No. 308-320: Edging: Smooth nylon
- Ident. No. 422–499: Edging: Steel wire, smooth
- Ident. No. 422-630:
 - With W 1/2-inch connecting thread for handle, extensions or adapter
- Machine use possible with adapter: Max.
 1000 rpm (rotation speed) use brush clockwise!
- Ident. No. 522-544: Edging: Stainless steel wire, smooth



Ident. No. 008-020



Ident. No. 108-120



Ident. No. 208-220



Ident. No. 308-320




Ident. No. 422-499



Ident. No. 522-544



Ident. No. 622-630

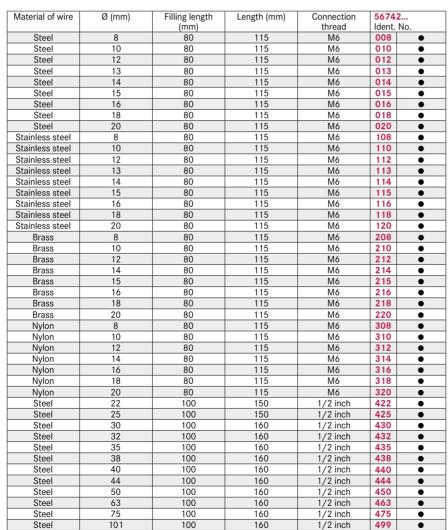

150

150

160

1/2 inch

1/2 inch

1/2 inch

522

525

530

•

100

100

100

Hand tools \ Round brushes

Material of wire	Ø (mm)	Filling length (mm)	Length (mm)	Connection thread	56742 Ident. No.
Stainless steel	32	100	160	1/2 inch	532
Stainless steel	38	100	160	1/2 inch	538
Stainless steel	40	100	160	1/2 inch	540
Stainless steel	44	100	160	1/2 inch	544
Brass	22	100	150	1/2 inch	622
Brass	25	100	150	1/2 inch	625
Brass	30	100	160	1/2 inch	630

Prod. Gr. 5HF

<u> ATORN</u>

Handles, extensions, wire rods and thread adapter for pipe brushes

With M6 or 1/2 inch thread connection

Application:

Ident. No. 001, 100: For screwing in the pipe brushes and extensions

Ident. No. 002–004, 101–102: For extending pipe brushes

Ident. No. 005, 103: For using the pipe brushes in

a machine

Execution:

- Ident. No. 001, 100:
- Ergonomically shaped two-component handle with optimal power transmission properties
- with suspension hole
- Ident. No. 002–003, 101: Chuck, rust-free zinc plated
- Ident. No. 004, 102: Chuck, stainless, zinc plated
- Ident. No. 005, 103: Rust-free zinc plated



Ident. No. 005

Ø (mm)			25	-	-	6	25	-	6
Wire Ø (mm)			-	4	4	-	-	6	-
Length (mm)			130	200	1000	50	155	1000	50
Connection thr	ead		M6	M6	M6	M6	1/2 inch	1/2 inch	1/2 inch
56742	Handle	Ident. No.	001 •	-	-	-	100	-	-
56742	Extension	Ident. No.	-	002 •	003	-	-	101 •	-
56742	Wire handle	Ident. No.	-	-	004	-	-	102	-
56742	Threaded adapter	Ident. No.	-	-	-	005 •	-	-	103 •

Prod. Gr. 5HF

ORION®

Set of digit and letter stamps

for manual use without depth limitation

Application:

For labelling parts.

Execution:

- Standard lettering
- Left-engraved
- DIN 1451 typeface
- Close-spaced lettering

■ Hardness at end of writing: 58-60 HRC

■ Maximum strength: 1200 N/mm²

■ No. 56925: Nickel plated

■ No. 56926: Nickel-plated

Delivery:

In plastic box

		cter type provided	Numbers	Letters	
		9	27		
Character height	Length x width x	Surface	With depth	56925	56926
(mm)	height		limiter	Ident. No.	Ident. No.
2	7 x 7 x 75 mm	Nickel plated	No	720 •	720 •
3	8 x 8 x 75 mm	Nickel plated	No	730	730
4	9 x 9 x 80 mm	Nickel plated	No	740	740
5	10 x 10 x 80 mm	Nickel plated	No	750 •	750 •
6	12 x 12 x 85 mm	Nickel plated	No	760	760 •
8	14 x 14 x 90 mm	Nickel plated	No	780 •	780 •
10	16 x 16 x 90 mm	Nickel plated	No	800	800



DRION Set of digit and letter stamps

for manual use with depth limitation

Application:

For labelling parts

Execution:


- With depth limit
- Standard lettering
- Exactly in the centre
- DIN 1451 typeface

- Close-spaced lettering
- Hardness at end of writing: 58-60 HRC
- Maximum strength: 1200 N/mm²
- Nickel-plated

Delivery:

In plastic box

		Numbers	Letters			
		Numbe	er of stamps (PCS)	9	27	
Character height (mm)	Length x width x height	Surface	With depth limiter	56930 Ident. No.	56932 Ident. No.	
1	7 x 7 x 75 mm	Nickel plated	Yes	010	010	
1.5	7 x 7 x 75 mm	Nickel plated	Yes	015	015	
2	7 x 7 x 75 mm	Nickel plated	Yes	020	020	
2.5	7 x 7 x 75 mm	Nickel plated	Yes	025	025	
3	8 x 8 x 75 mm	Nickel plated	Yes	030	030	
4	8 x 8 x 75 mm	Nickel plated	Yes	040	040	
5	9 x 9 x 80 mm	Nickel plated	Yes	050 ●	050	
6	11 x 11 x 80 mm	Nickel plated	Yes	060	060	
8	12 x 12 x 85 mm	Nickel plated	Yes	080	080	
10	14 x 14 x 90 mm	Nickel plated	Yes	100	100	





Prod. Gr. 577

Painted sheet steel tool box

Folding and locking

Application:

For the safe transport of your tools

Execution:

- Extremely sturdy design
- Fold-down tubular carry handle
- Lid with projecting edges and continuous piano hinge, lockable with a padlock (not included in scope of delivery)
- Hammered, blue

Technical data:

- Material: Sheet steel
- Colour: Blue
- With handle: Yes
- Lock type: Optional with padlock



Design		Three-piece	Five-piece	Five-piece	Five-piece
Width x height x depth		430 x 200 x 150	431 x 200 x 200	530 x 200 x 201	600 x 200 x 202
		mm	mm	mm	mm
52621	ldent. No.	010	020	030	040
	ident. No.	•	•	•	•

Prod. Gr. 582

ATORN Fabric tool shoulder bag with shoulder strap

with removable tool panels

Application:

Mobile use, easy to keep organised with removable tool boards

Execution:

- Shoulder bag with shoulder strap
- 2 spacious outer pockets, equipped with two plastic assortment boxes, can be removed
- 2 tool boards that can be removed individually, equipped with plug-in rails

 Sturdy and durable Cordura Nylon fabric

Technical data:

- Number of compartments: 8 PCS
- Width x height x depth: 200 x 300 x 100 mm
- Colour: Black
- With rollers: No
- With carry belt: Yes

55391	Ident. No.	010
55391	ident. No.	•





ATORN Tool shell case, portable - or mobile

Suitable for air transport, made of ABS plastic



Application:

for practical tool transportation

Execution:

- Robust aluminium frame with impact edge protection protects the tools and case
- 2 toggle locks and Icode combination lock for security
- 4 additional feet prevent the shell from being scratched and improve stability
- document compartment in A4 format

- removable cover panel with 15 tool compartments
- variable base shell (2 aluminium dividers, 4 end caps, 2 middle caps)
- Ident. No. 100:
- High-impact-resistant ABS material with ergonomic carrying handle
- With hinge cover and safety lid holder
- detachable tool panel with 22 tool compartments on front and rear
- Ident. No. 150:

- made from ABS with user-friendly telescopic handle and 2 inline rollers
- robust, comfortable carrying handle
- hinged cover and security lid holder with catch
- detachable tool panel with 23 tool compartments on front and rear

Advantage:

■ Ident. No. 150: Good handling, massive capacity, modern design







Ident. No. 150









Internal length x internal width x internal height	Load-carrying capacity (kg)	Volume (I)	Material	Capable of flying	Weight (kg)	5546 Ident.	
470 x 370 x 190 mm	30	33	ABS	Yes	-	100	•
485 x 375 x 200 mm	30	36	ABS	Yes	6.6	150	•

Prod. Gr. 538



ATORN Tool cases and roller cases

Suitable for air transport, made of ABS plastic, black



Application:

Ident. No. 110: For practical transport of tools

Execution:

- Ident. No. 020:
 - Made of ABS plastic, black
- With solid aluminium frame
- Castors
- Ratchet hinge
- Anti-tilt cylinder locks
- Tool trays made from Con-Pearl, with 25 pockets
- 400-mm keep-safe compartment
- Cover flap with 15 pockets and keep-safe compartment
- Base tray with cover panel, can be divided as required

- Ident No. 110:
- Made of ABS plastic
- Black
- 4x telescopic drawer, 1050 mm in length
- Tool panel with 25 pockets and 400-mm keep-safe compartment
- Cover flap with 15 pockets and 400-mm keep-safe compartment
- Inner tray can be partitioned as

Advantage:

■ Ident. No. 110: Extremely stable and easy to pull/slide thanks to large rollers with large wheelbase

Delivery:

contains no tools

Number of compartments (PCS)		43	43
Internal length x internal width x		470 x 200 x 360	470 x 210 x 365
internal height		mm	mm
Load-carrying capacity		30	32
Volume (I)		31	34
Material		ABS	ABS
Capable of flying		Yes	Yes
55464	ldent. No.	020 •	110 •

Prod. Gr. 538



Ident. No. 110 (Contents not included)



Product video: YouTube ID: I1dxsOW1hkY

ATORN Tool case

Execution:

- With one-sided tool panel and plug-in options in lid
- Stitched nylon pockets
- Sturdy aluminium frame, plastic floor glides
- Spacious base shell, freely dividable
- Comfortable carrying handle, lockable buckle locks

Technical data:

- Number of compartments: 7 PCS
- Internal length x internal width x internal height: 450 x 318 x 140 mm

55463	Ident. No.	010 •
Prod. Gr. 538		



IRION Hard tool case with tool assortment, 48 pieces

60 pieces

Execution:

- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors and ratchet hinges
- Lockable anti-tilt cylinder locks
- equipped with high-quality and robust ATORN, ORION and branded tools

Advantage:

■ For heavy-duty use

Delivery:

- 1x wooden folding rule 2 m
- 1x aluminium spirit level 400 mm
- 1x tape measure 3 m
- 12x combination wrenches, AF 6/7/8/9/10/11/12/13/14/15/16/17 mm
- 3x slotted screwdrivers 4.0x100/5.5x100/ 8x175 mm
- 2x Phillips screwdrivers PH 1/PH 2
- 4x VDE slotted screwdrivers 2.5x75/3x100/4x-100/5.5x125/6.5x150 mm
- 2x VDE Phillips screwdrivers PH 1/PH 2

- 1x voltage tester 3 x 65 mm
- 1x automatic wire-stripping pliers
- 1x safety knife
- 1x tweezers 110 mm
- 1x all-purpose shears
- 1x side cutters 165 mm ■ 1x snipe nose pliers 160 mm
- 1x water pump pliers 240 mm ■ 2x machinist's hammers 200/500 g
- 1x combination pliers 180 mm
- 1x plastic hammer 32 mm
- 1x reamer 100 mm
- 1x scriber
- 1x flat chisel 175 mm
- 1 set with 6 pieces (5x drift punches 2-6 mm/1x centre punch)
- 3x flat hand engineer's files with handle, 150 mm H2: Flat/round/half-round
- 8x hex. screwdrivers 2-10 mm
- 1x metal saw bow with blade 300 mm
- 1x screw clamp 200 mm







ATORN Hard tool case with tool assortment, 48 pieces 48 pieces

Execution:

- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors
- Ratchet hinges
- Lockable anti-tilt cylinder locks
- Equipped with high-quality and robust ATORN

Advantage:

■ For heavy-duty use

Delivery:

• 9 x combination wrenches AF 8/10/13/14/15/16/17/18/19 mm

- 2 x Phillips screwdrivers PH 1 x 80 mm, PH 2 x 100 mm
- 1 x hexagon socket wrench set long, with ball head AF 1.5-10
- 1 x TX wrench set with ball head TX 9-40
- 3 x slotted screwdrivers 4.5 x 90 mm/6.5 x 125 mm/8.0 x 150 mm
- 1 x machinist's hammer 500 g
- 1 x combination pliers 180 mm
- 1 x snipe nose pliers
- 1 x side cutters 165 mm
- 1 x water pump pliers 250 mm
- 1 x aluminium handsaw bow 300 mm
- 10 x saw blades for metal
- 1 x folding rule 2 m

52560	Ident. No.	600 ●
Drod Cr E02		





ATORN Roller tool case with tool assortment, 38 pcs

Execution:

- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors and ratchet hinges
- Lockable anti-tilt cylinder locks
- Equipped with high-quality and robust ATORN

Delivery:

- 1 x roller case 470 x 190 x 360 mm
- 1 x combination spanner set, 9 pcs 8-19 mm
- 1 set of hexagon socket screwdrivers 9 pcs
- 1 x TX screwdriver, hinged holder 8 pieces

- Screwdrivers, 1 each of 4.5 x 90 mm, 6.5 x 125 mm, 8.0 x 150 mm
- Screwdrivers 1 each PH 1 x 80 mm, PH 2 x 100 mm
- 1 x 3C machinist's hammer 0.300 kg
- 1 x combination pliers, 180 mm, 2-component
- 1 x snipe nose pliers, 200 mm, curved, 2 component grip
- 1 x water pump pliers 250 mm, chrome-plated
- 1 x side cutters, 165 mm, 2-component grip
- 1 x soft-face hammer, no recoil, 30 mm
- 1 x utility knife with 18 mm snap-off blade

5256	bU	ldent. No.	700 ●
------	----	------------	----------



ATORN Tool case with tool assortment, 50 pcs

Application:

Tool case equipped with wide range of tools, with hard foam inlay - all tools are neatly laid out and held securely.

Execution:

- Robust and durable tools in industrial quality
- Screwdriver, pliers and reversible ratchet with two-component handles with perfect ergonomic
- acase external dimensions: H 440 x W 505 x D 130 mm

Advantage:

- Case features sandwich frame construction that affords the case a large carrying capacity
- Fasteners closed with your knees firmly press the case together and give it excellent stability
- Softtouch grip; provides support and comfort when being worn
- Easy to open the case on both sides; tools are held securely in foam and cannot fall out
- Partition panel in the centre of the case also provides optimum protection for tools

Delivery:

- 1 x combination spanner set DIN 3113 A, chromeplated 8 pieces, size 8-19 mm
- 1 x hexagonal socket wrench inserts 1/2 inch, size 10 to 24 mm

- 1 x hexagonal spark plug insert 1/2 inch with rubber insert size 20.8
- 1 x reversible ratchet 1/2 inch with quick release button 255 mm
- 1 x handle with sliding piece 1/2 inch and cardan joint 70 mm
- 1 x extension 1/2 inch, 125 mm and 250 mm
- 1 x hexagonal ball head T-handle wrench set, 9 pcs, long, size 1.5-10 mm
- Workshop screwdrivers, slotted, 1 each of 0.8 x 4.5/1.0 x 5.5/1.2 x 6.5 mm
- Phillips screwdrivers, 1 each PH 1 x 80 mm, PH 2 x 100 mm
- 1 x machinist's hammer, DIN 1041 with nylon shaft protection sleeve, 300 g
- 1 x water pump pliers 250 mm
- 1 x combination pliers, 180 mm
- 1 x side cutters 160 mm
- 1 x VDE single-pole voltage tester, 150-250 volts
- 1 x pocket tape rule, end hook with magnet,
- 1 x snipe nose pliers, bent, 200 mm
- 1 x universal knife, with 18-mm snap-off blade
- 1 x LED pen lamp incl. battery
- 1 x universal voltage tester, 6-24 volts

Technical data:

■ Number of pieces in assortment/set: 50 PCS

52560	ldent. No.	800 •

Prod. Gr. 582

DRION Tool assortment

Files and saws, 11 pieces

Delivery:

- 1 x flat blunt-ended file 300 mm, cut 1
- 1 x flat blunt-ended file 300 mm,
- 1 x triangular file 250 mm, cut 1
- 1 x triangular file 250 mm, cut 3
- 1 x round file 250 mm, cut 2
- 1 x square file 250 mm, cut 2
- 1 x half-round file 250 mm, cut 2
- 1 x file brush
- 1 x saw bow 300 mm
- 1 x bi-metal saw blade
- 1 x chip brush

52561	Ident. No.	010 •
-------	------------	----------

Prod. Gr. 6AF



Tool assortment

Hammers, chisels and pliers, 20 pieces

Delivery:

- 1 x machinist's hammer 300 g
- 1 x machinist's hammer 500 g
- 1 x chisel/drift/centre punch set, 6 pieces
- 1 x parting chisel 150 mm
- 1 pair of safety goggles
- 1 x slotted screwdriver 6.5 mm
- 1 x cowhide leather work gloves
- 1 x hand brush
- 1 x banded ear plugs
- 1 x triangular hollow scraper 150 mm
- 1 x utility knife with trapezoidal blades
- 1 x non-recoil soft-face hammer
- 1 x side cutters 165 mm, with two-component grip cover
- 1 x water pump pliers 250 mm
- 1 x Phillips screwdriver PH 2

52561	Ident. No.	020 •
-------	------------	----------



Tool assortment

for industrial electronic technicians, 92 pieces

Delivery:

- 1 x machinist's hammer 0.4 kg
- 1 x plastic hammer D 32
- 1 x half-round file 200 mm, cut 2
- 1 x file handle made of hardwood 110 mm, long
- 6 x key files 100 mm, cut 2
- 1 x mini universal saw bow 240 mm
- 9 x combination spanners 8-19 mm
- 6 x hexagonal screwdrivers 2-6 mm, in plastic pouch
- 1 x socket wrench set; 1/4 inch, 42 pieces
- 7 x slotted screwdrivers, VDE
- 1 x Langbeck flat-nose pliers 160 mm, chromeplated, VDE
- 1 x snipe nose pliers 200 mm, chrome-plated, angled 45°, VDE
- 1 x combination pliers VDE 180 mm, chrome-plated

- 1 x side cutters VDE 140 mm
- 1 x all-purpose shears, straight, 190 mm
- 1 x crimping pliers for insulated connectors 210 mm
- 1 x universal key made of metal, for switch cabinet
- 1 x combination shoulder and contact screw key
- 1 x universal cable knife
- 1 x cable stripping tool
- 1 x round-nose pliers 160 mm, chrome-plated VDE
- 1 x side cutters 160 mm, chrome-plated VDE
- 1 x water pump pliers 250 mm
- 1 x cable and installation knife
- 1 x automatic wire stripping pliers
- 1 x voltage tester
- 1 x wire stripping pliers 160 mm
- 1 x wooden folding rule 2 m

	000000000000000000000000000000000000000
1	
3-	

Prod. Gr. 580

Tool assortment

for industrial mechanics, 78 pieces

Delivery:

- 1 x spirit level 500 mm
- 1 x machinist's hammer 0.5 kg
- 1 x plastic hammer D 40
- 6 x chisels, in metal case
- 1 x blind rivet tool, model NTS, in assortment
- 1 x scriber with steel tip 165 mm
- 1 x flat blunt-ended file 200 mm, cut 2
- 1 x round file 200 mm, cut 2
- 1 x half-round file 200 mm, cut 2
- 1 x triangular file 200 mm, cut 2
- 4 x file handles made of hardwood, 110 mm
- 1 x triangular hollow-ground scraper, chrome-van.150 mm
- 1 x metal saw bow for saw blades 300 mm
- 10 x bow saw spare blades HSS-Bi.Flex. 300 mm, 24 teeth
- 12 x combination spanners SW 10-32 mm
- 8 x hexagonal screwdrivers 2-10 mm, in plastic pouch
- 6 x screwdrivers in box

- 1 x water pump pliers 250 mm
- 1 x pipe wrench 1½ inch, 425 mm
- 1 x heavy-duty side cutters, plain, 160 mm
- 1 x combination pliers, plain, 180 mm
- 1 x triple pliers, chrome-plated, 160 mm
- 1 x pliers for circlips, straight 19–60 mm diameter type J 2
- 1 x pliers for circlips, straight 19-60 mm diameter type A 2
- 1 x punch snips, stainless steel, left-handed, 250 mm
- 1 x punch snips, stainless steel, right-handed, 250 mm
- 1 x socket wrench set 1/2 inch square, in metal case; 13 pieces
- 1 x prism-jaw locking pliers 250 mm
- 1 x pocket tape measure 3 m
- 1 x precision pocket vernier caliper 150 mm
- 1 x universal safety goggles
- 1 x safety knife with 3 trapezoidal blades
- 1 pair of work gloves

52560 Ident. No.			
	52560	Ident. No.	020



LET'S WORK TOGETHER.

EXPLORE THE HAHN+KOLB ONLINE WORLD

- ONLINE SHOP WITH MORE THAN 120,000 PRODUCTS
- DETAILED INFORMATION ON OUR SERVICES AND SOLUTIONS OFFERS
- NAVIGATORS AND CONFIGURATORS

AND MUCH MORE ...

WWW.HAHN-KOLB.COM

OUR HEADQUARTERS: HAHN+KOLB WERKZEUGE GMBH

SCHLIEFFENSTRASSE 40 71636 LUDWIGSBURG

TEL. +49 7141 498 40 FAX. +49 7141 498 4999

WWW.HAHN-KOLB.COM

INTERNATIONALSALES@HAHN-KOLB.COM



Order in our online shop www.hahn-kolb.com



Order by e-mail: internationalsales@hahn-kolb.com



Order by phone: +49 7141 498-6989